

Signal processing circuit for 1-D PSD

C5923

Circuit board for easier 1-D PSD operation



Features

- No complicated adjustments required
Position can be measured just by installing a 1-D PSD on the board.
- Accurate position sensing
Use of pulse-driven LED allows accurate position sensing even under background light, and independent of pulsed light intensity.
- Compact design
An LED drive circuit, head amp, signal addition/subtraction circuits, sample hold circuit, synchronization circuit and analog divider circuit are mounted on a compact PC board.

Applications

- Displacement measurements using pulsed light synchronized with the circuit
- Various studies using 1-D PSD
- Performance evaluation of 1-D PSD

■ Absolute maximum ratings

Parameter		Symbol	Value	Unit
Signal processor	Supply voltage	Vcc Max.	±18	V
	Input signal current	IIN Max.	Vcc Max. × 10 ⁻⁵	A
	Output short-circuit time	-	Continuous	s
	Operating temperature	ToPr	0 to +50	°C
LED driver	Transistor collector-emitter voltage	VCE	+30	V
	Transistor collector current *1	Ic	800	mA
	Transistor collector dissipation *1	Pc	600	mW

■ Recommended operating range

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	Vcc		±14.5	±15	±15.5	V

■ Specifications / characteristics (Ta=25 °C, Vcc=±15 V)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit
Signal processor	Head amp conversion impedance *2	Rf	Factory setup prior to shipping	0.95 × 10 ⁵	1 × 10 ⁵	1.05 × 10 ⁵	V/A
	Feedback capacitance *2	Cf	Factory setup prior to shipping	21	22	23	pF
	Input signal current *3	IIN	Photocurrent with PSD installed	1 × 10 ⁻⁵	-	1 × 10 ⁻⁴	A
	Rise time (output 10 to 90 %)	tr	Output response time versus movement of light spot position, measured with PSD installed.	30	-	-	µs
	PSD reverse voltage	VR	Factory setup prior to shipping	0	5	14	V
	Output offset voltage	Vos	*5	-10	-	+10	mV
	Output voltage amplitude *4	Vo	With PSD installed and light spot falling on edge of active area.	-10	-	+10	V
	Output noise (analog divider)	Vn	All range *5	5	10	50	mVp-p
LED driver	Current consumption	Icc	*5	-	±45	-	mA
	Transistor collector current	Ic	*1	-	170	-	mA p-p
	Repetition frequency	fr	*1	-	3333	-	Hz
	Output method	-	-	Open collector			-

*1: Duty ratio: 3/10, pulse width: 90 µs, LED: L1915-01 (made by Hamamatsu; sold separately)


*2: These resistors are lead types and inserted into sockets, so it can be easily exchanged by the user if necessary in a range between 1 × 10⁴ to 1 × 10⁶ Ω. For more details, see the instruction manual that comes with the product.

*3: PSD does not operate correctly if the input signal current is outside the specified range.



*4: Maximum output amplitude can be adjusted in a range of ±2 to ±10 V according to PSD type to be used.

*5: With no PSD installed and LED turned off; pulsed current of 20 µA (X1=X2) is supplied to the circuit as current signal (duty ratio: 3/10, pulse width: 90 µs) that substitutes for PSD photocurrent

■ Dimensional outline (unit: mm, tolerance: ±0.2 mm)

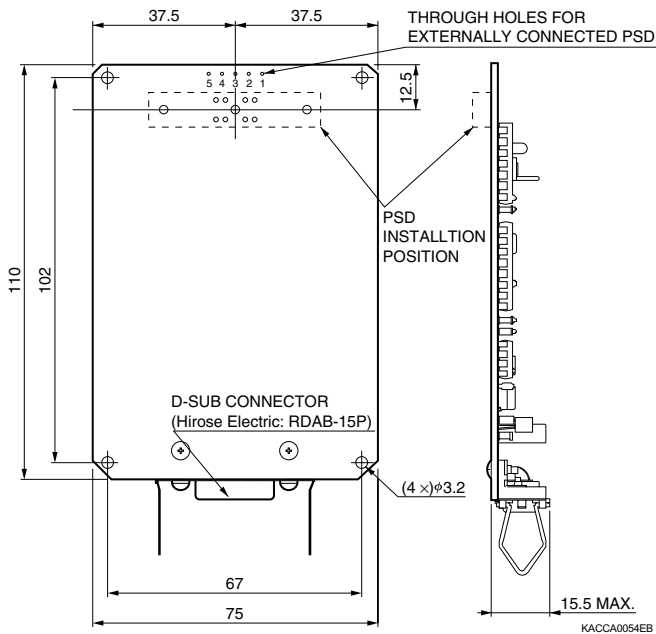

■ PSD and output voltage

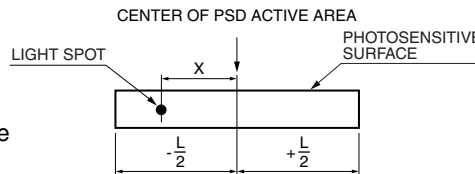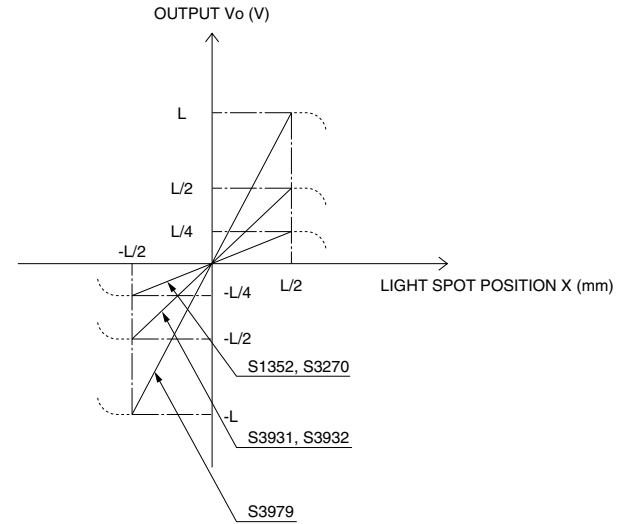

KACCB0040EB

KPSDC0062EA

S1352, S3931 and S3932 (PSD made by Hamamatsu) can be directly mounted on the board. To mount other types of 1-D PSDs, use through holes on the board.

■ Input/output terminals

● D-sub connector


Terminal No.	Name	Content
1	VREF	Reference voltage monitor output
2	VR	PSD bias voltage monitor output
3	Vo	Divider output (position-converted voltage)
4	K	Connection to LED or other cathode
5	A	Connection to LED or other anode
6	+V	+15 V input
7	-V	-15 V input
8	G	GND
9	V1	Head amp output 1
10	V2	Head amp output 2
11	V3	Subtracted signal pulse output
12	V4	Summed signal pulse output
13	V5	Subtracted signal output after S/H *
14	V6	Summed signal output after S/H *
15	G	GND

* S/H: sample hold

● Through holes for externally connected PSD

Terminal No.	Name	Content
1	IN1	Input from PSD output 1
2	G	GND
3	VR	Bias voltage output for connection to PSD cathode
4	G	GND
5	IN2	Input from PSD output 2

■ Operating example

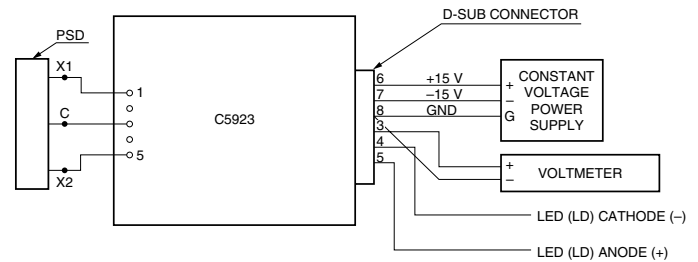

KACCC0071EA

Measurement conditions

1. Light source: LED ($\lambda_p=900$ nm)
2. Light spot: $\phi 200$ μ m
3. PSD: S1352 (L=34 mm)
4. PSD photocurrent: 10 μ A
5. Frequency bandwidth: 10 Hz
6. Voltmeter: 195A (KEITHLEY)
7. Constant voltage power supply: ± 15 V, power supply capacity: 0.2 A or more, ripple voltage: 3 mVp-p or less

When measured under the above conditions, the following output voltage amplitude and position resolution can be obtained.

- Output voltage amplitude: $V_{FS}=\pm 10$ V
- Position resolution: Δl =approx. 0.6 μ m (calculated value)

■ Accessories

- Connector HDAB-15S (HIROSE: For connections to power supply and output readout device)

HAMAMATSU

Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions. Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2003 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division

1126-1 Ichino-cho, Hamamatsu City, 435-8558 Japan, Telephone: (81) 053-434-3311, Fax: (81) 053-434-5184, <http://www.hamamatsu.com>

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658

France: Hamamatsu Photonics France S.A.R.L.: 8, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01

Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741