

HIGH RIPPLE-REJECTION CMOS LOW DROPOUT VOLTAGE REGULATOR

S-L2980 Series

The S-L2980 series is a low dropout voltage regulator designed for use in battery powered devices and developed using CMOS technology. On-chip low on-resistance transistor can provide low dropout voltage and large output current. A power-off switch ensures long battery life.

Various types of output capacitors can be used in the S-L2980 series compared with the former CMOS voltage regulators. A small ceramic capacitor can also be used.

■ Features

- Low dropout voltage:
Typically 120mV @ 50mA load for 3.0 V output
- Low current consumption:
Typically 90 μ A, 140 μ A max. at operation
- Sleep mode: Quiescence current
Typically 0.1 μ A, 1 μ A max. at power off
- Output voltage: 1.5 V to 6.0 V, 0.1 V step
- High accuracy output voltage: $\pm 2.0\%$
- High peak current capability:
150 mA @ $V_{IN} \geq V_{OUT(S)} + 1$ V ^{Note}
- Ripple rejection: 70 dB typ. @1 kHz
- Built-in power-off circuit:
- Low ESR capacitor:
A 2.2 μ F ceramic capacitor can be used as the output capacitor.
- Ultra compact package: SOT-23-5, 5-pin SON(A)

Note: Attention should be paid to power dissipation of the package when the load is large.

■ Package

- | | |
|--------------|---------------------------------|
| SOT-23-5 | (Package drawing code, MP005-A) |
| 5-pin SON(A) | (Package drawing code, PN005-A) |

■ Block Diagram


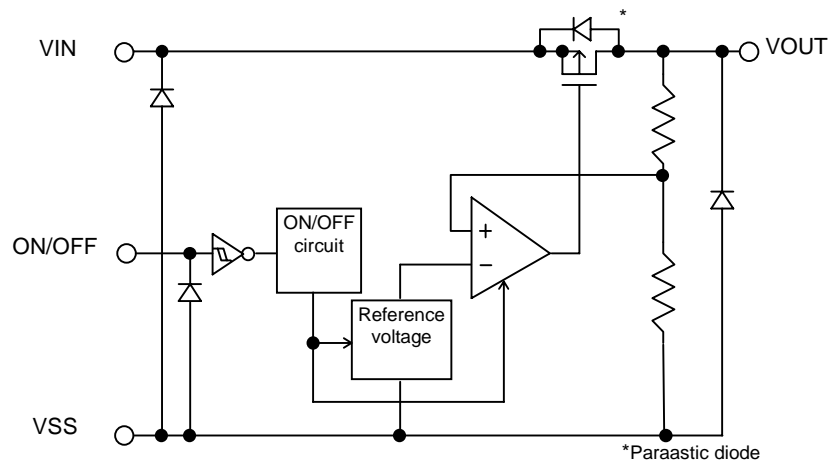


Figure 1 Block Diagram

■ Selection Guide

Product Name

S-L2980xxxxx - xxx TF

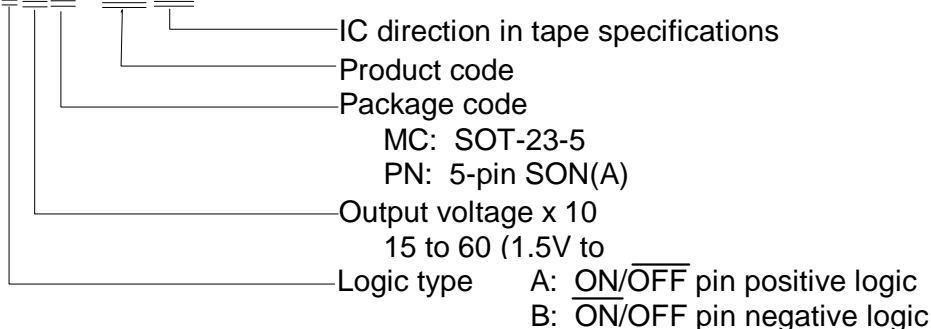

Product List

Table 1

Output Voltage	SOT-23-5	5-pin SON(A)
1.7 V \pm 2.0%	S-L2980A17MC-C6CTF	—
1.8 V \pm 2.0%	S-L2980A18MC-C6DTF	S-L2980A18PN-C6DTF
1.9 V \pm 2.0%	—	S-L2980A19PN-C6ETF
2.5 V \pm 2.0%	S-L2980A25MC-C6KTF	S-L2980A25PN-C6KTF
2.7 V \pm 2.0%	S-L2980A27MC-C6MTF	S-L2980A27PN-C6MTF
2.8 V \pm 2.0%	S-L2980A28MC-C6NTF	S-L2980A28PN-C6NTF
2.9 V \pm 2.0%	—	S-L2980A29PN-C6OTF
3.0 V \pm 2.0%	S-L2980A30MC-C6PTF	S-L2980A30PN-C6PTF
3.3 V \pm 2.0%	S-L2980A33MC-C6STF	S-L2980A33PN-C6STF
3.8 V \pm 2.0%	S-L2980A38MC-C6XTF	S-L2980A38PN-C6XTF
4.0 V \pm 2.0%	S-L2980A40MC-C6ZTF	S-L2980A40PN-C6ZTF
5.0 V \pm 2.0%	S-L2980A50MC-C7JTF	S-L2980A50PN-C7JTF

Note:

Contact SII sales office for products with output voltage not specified above.

■ Pin Configurations

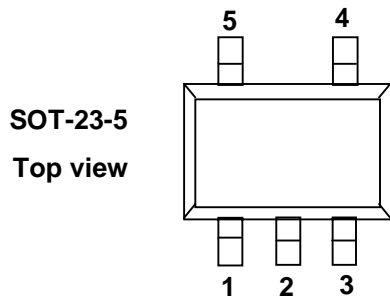


Figure 2




Figure 3

Table 2 Pin Assignment

Pin No.	Symbol	Description
1	V _{IN}	Input voltage pin
2	V _{SS}	GND pin
3	ON/OFF	Power-off pin
4	NC	No connection ^{Note}
5	V _{OUT}	Output voltage pin

Table 3 Pin Assignment

Pin No.	Symbol	Description
1	NC	No connection ^{Note}
2	V _{SS}	GND pin
3	ON/OFF	Power-off pin
4	V _{IN}	Input voltage pin
5	V _{OUT}	Output voltage pin

Note NC pin is electrically open. NC pin can be connected to V_{IN} or V_{SS}.

■ Absolute Maximum Ratings

Table 4 Absolute Maximum Ratings (T_a=25°C unless otherwise specified)

Item	Symbol	Absolute Maximum Rating		Units
Input voltage	V _{IN}	V _{SS} -0.3 to V _{IN} +12		V
	V _{ON/OFF}	V _{SS} -0.3 to V _{IN} +12		V
Output voltage	V _{OUT}	V _{SS} -0.3 to V _{IN} +0.3		V
Power dissipation	P _D	SOT-23-5	250	mW
		5-pin SON(A)	100	
Operating temperature range	T _{opr}	-40 to +85		°C
Storage temperature range	T _{stg}	-40 to +125		°C

Note:

Although the IC contains protection circuit against static electricity, excessive static electricity or voltage which exceeds the limit of the protection circuit should not be applied to.

■ Electrical Characteristics

1. S-L2980Axx, S-L2980Bxx

Table 5 Electrical Characteristics (Ta=25°C unless otherwise specified)

Item	Symbol	Conditions	Min.	Typ.	Max.	Units	Test circuits	
Output voltage 1)	V _{OUT}	V _{IN} =V _{OUT(S)} +1 V, I _{OUT} =50 mA	V _{OUT(S)} × 0.98	V _{OUT(S)}	V _{OUT(S)} × 1.02	V	1	
Output current 2)	I _{OUT}	V _{IN} =V _{OUT(S)} +1 V	150 5)	–	–	mA	3	
Dropout voltage 3)	V _{drop}	I _{OUT} = 50mA	1.5V ≤ V _{OUT(S)} ≤ 1.7V	–	0.17	0.33	V	1
			1.8V ≤ V _{OUT(S)} ≤ 1.9V	–	0.16	0.29	V	1
			2.0V ≤ V _{OUT(S)} ≤ 2.4V	–	0.15	0.26	V	1
			2.5V ≤ V _{OUT(S)} ≤ 2.9V	–	0.13	0.20	V	1
			3.0V ≤ V _{OUT(S)} ≤ 3.2V	–	0.12	0.15	V	1
			3.3V ≤ V _{OUT(S)} ≤ 6.0V	–	0.11	0.14	V	1
Line regulation	$\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$	V _{OUT(S)} + 0.5 V ≤ V _{IN} ≤ 10 V, I _{OUT} = 50 mA	–	0.05	0.2	%/V	1	
Load regulation	Δ V _{OUT2}	V _{IN} =V _{OUT(S)} +1 V 1mA ≤ I _{OUT} ≤ 80 mA,	–	12	40	mV	1	
Output voltage temperature coefficient 4)	$\frac{\Delta V_{OUT}}{\Delta T_a \cdot V_{OUT}}$	V _{IN} = V _{OUT(S)} + 1 V, I _{OUT} = 50mA -40°C ≤ Ta ≤ 85°C	–	±100	–	ppm /°C	1	
Current consumption during operation	I _{SS1}	V _{IN} = V _{OUT(S)} + 1 V, ON/OFF pin = ON , no load	–	90	140	μA	2	
Current consumption when power off	I _{SS2}	V _{IN} = V _{OUT(S)} + 1 V, ON/OFF pin = OFF, no load	–	0.1	1.0	μA	2	
Input voltage	V _{IN}		2.0	–	10	V	1	
Power-off pin input voltage "H"	V _{SH}	V _{IN} = V _{OUT(S)} + 1 V, R _L = 1kΩ, Checked by V _{OUT} level.	1.5	–	–	V	4	
Power-off pin input voltage "L"	V _{SL}	V _{IN} = V _{OUT(S)} + 1 V, R _L = 1kΩ, Checked by V _{OUT} level.	–	–	0.3	V	4	
Power off pin input current "H"	I _{SH}	V _{IN} = V _{OUT(S)} + 1 V, V _{ON/OFF} = 7 V	–	–	0.1	μA	4	
Power off pin input current "L"	I _{SL}	V _{IN} = V _{OUT(S)} + 1 V, V _{ON/OFF} = 0 V	–	–	-0.1	μA	4	
Ripple rejection	RR	V _{IN} = V _{OUT(S)} + 1V f = 1 kHz ΔV _{rip} =0.5 V _{rms} I _{OUT} =50 mA	1.5 V ≤ V _{OUT(S)} ≤ 3.3 V	–	70	–	dB	5
			3.4 V ≤ V _{OUT(S)} ≤ 5.0 V	–	65	–	dB	5
			5.1 V ≤ V _{OUT(S)} ≤ 6.0 V	–	60	–	dB	5

- 1) V_{OUT(S)} = Specified output voltage
V_{OUT} = Actual output voltage at the fixed load (=50 mA) and V_{OUT(S)}+1.0 V input.
- 2) Output current at which output voltage becomes 95% of V_{OUT} after gradually increasing output current.
- 3) V_{drop} = V_{IN1} - (V_{OUT} × 0.98), where V_{IN1} is the input voltage at which output voltage becomes 98% of V_{OUT} after gradually decreasing input voltage.
- 4) A change in temperatures [mV/°C] is calculated using the following equation.

$$\frac{\Delta V_{OUT}}{\Delta T_a} [\text{mV}/^\circ\text{C}] = V_{OUT(S)} [\text{V}] \times \frac{\Delta V_{OUT}}{\Delta T_a \cdot V_{OUT}} [\text{ppm}/^\circ\text{C}] \div 1000$$

The diagram shows three boxes: 'Change in temperature of output voltage' (bottom left), 'Specified output voltage' (middle), and 'Output voltage temperature coefficient' (bottom right). Arrows point from 'Specified output voltage' to the first term of the equation, and from 'Output voltage temperature coefficient' to the second term of the equation. An arrow also points from 'Change in temperature of output voltage' to the left side of the equation.

- 5) The output current can be supplied at least to this value.

■ Test Circuits

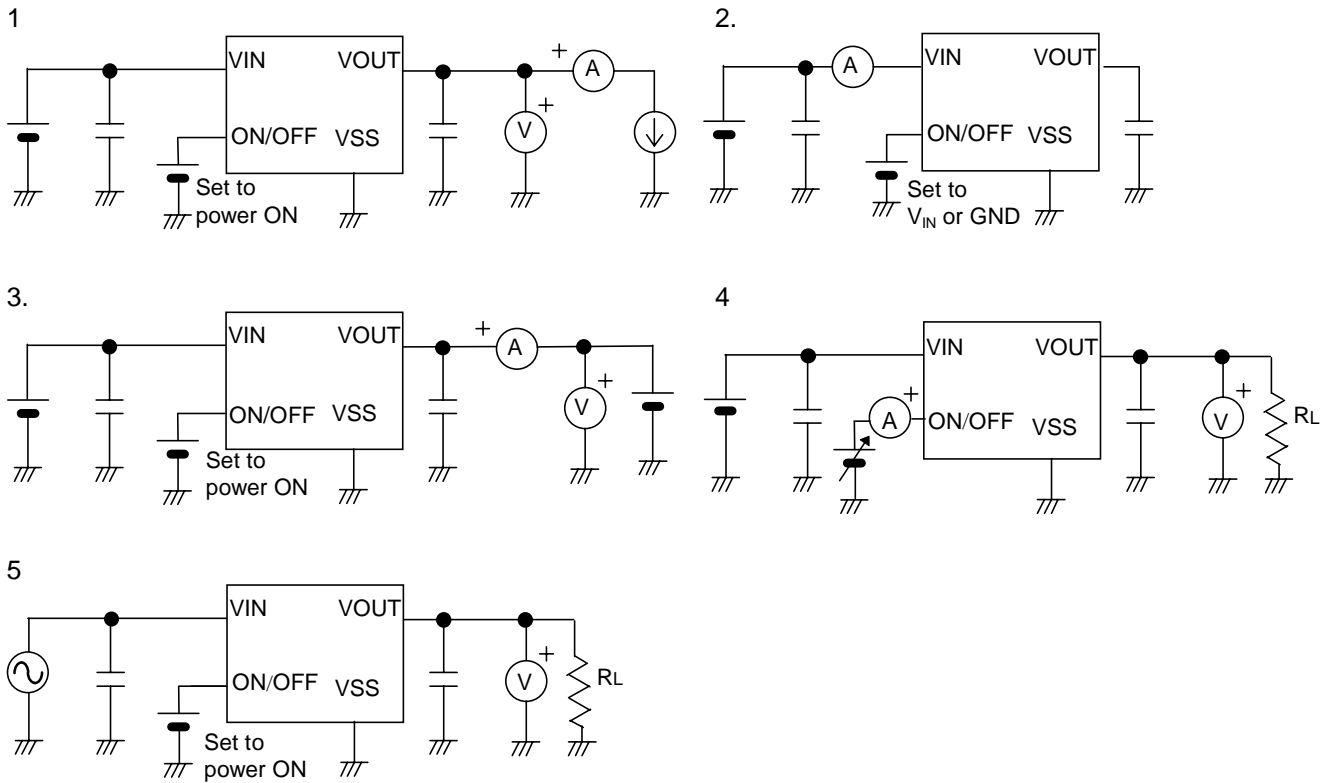


Figure 4 Test Circuits

■ Standard Circuit

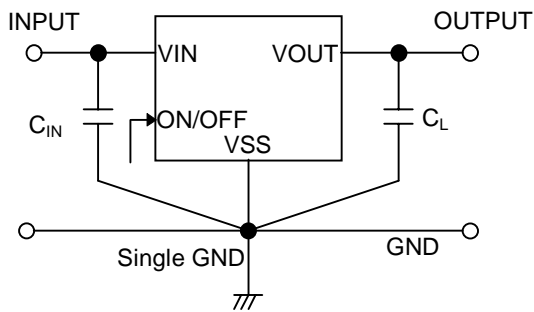


Figure 5 Standard Circuit

In addition to a tantalum capacitor, a ceramic capacitor of 2.2 μ F or more can be used for C_L . C_{IN} is a capacitor used to stabilize input.

■ Application Conditions

Input capacitor (C_{IN}) :	0.47 μ F or more
Input series resistance (R_{IN}) :	10 Ω or less
Output capacitor (C_L) :	2.2 μ F or more
Equivalent Series Resistance (ESR) for output capacitor:	10 Ω or less

■ Explanation for Terms

1. Low dropout voltage regulator

The low dropout voltage regulator is a voltage regulator whose dropout voltage is low due to its on-chip low on-resistance transistor.

2. Low ESR

Low ESR means the Equivalent Series Resistance of a capacitor is small.

The low ESR ceramics output capacitor (C_L) can be used in the S-L2980 Series.

The ESR of the output capacitor (C_L) should be 10Ω or less.

3. Output voltage (V_{OUT})

The accuracy of the output voltage is ensured at $\pm 2.0\%$ under the specified conditions of input voltage, which differ depending upon the product, fixed output current, and fixed temperature.

Note:

If the above conditions change, the output voltage value may vary and go out of the accuracy range of the output voltage. See the electrical characteristics and attached characteristics data for details.

4. Line regulations ($\frac{\Delta V_{OUT1}}{\Delta V_{IN} \cdot V_{OUT}}$)

Indicate the input voltage dependencies of output voltage. That is, the values show how much the output voltage changes due to a change in the input voltage with the output current remained unchanged.

5. Load regulation (ΔV_{OUT2})

Indicates the output current dependencies of output voltage. That is, the values show how much the output voltage changes due to a change in the output current with the input voltage remained unchanged.

6. Dropout voltage (V_{drop})

Indicates a difference between input voltage (V_{IN1}) and output voltage when output voltage falls by 98 % of V_{OUT} by gradually decreasing the input voltage.

$$V_{drop} = V_{IN1} - [V_{OUT} \times 0.98]$$

7. Temperature coefficient of output voltage [$\Delta V_{OUT}/(\Delta Ta \cdot V_{OUT})$]

The shadowed area in Figure 6 is the range where V_{OUT} varies in the operating temperature range when the temperature coefficient of the output voltage is ± 100 ppm/ $^{\circ}C$.


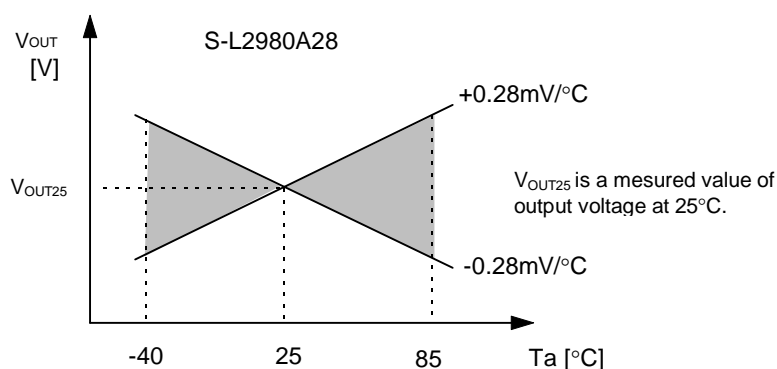


Figure 6

A change in temperatures of output voltage [mV/ $^{\circ}C$] is calculated using the following equation.

$$\frac{\Delta V_{OUT}}{\Delta Ta} [mV/^{\circ}C] = V_{OUT(S)} [V] \times \frac{\Delta V_{OUT}}{\Delta Ta \cdot V_{OUT}} [ppm/^{\circ}C] \div 1000$$

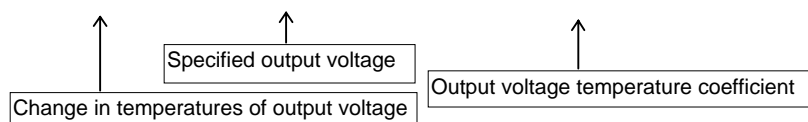

■ Operation

1. Basic operation

Figure 7 shows the block diagram of the S-L2980 Series.

The error amplifier compares a reference voltage V_{REF} with part of the output voltage divided by the feedback resistors R_s and R_f . It supplies the output transistor with the gate voltage, necessary to ensure certain output voltage free of any fluctuations of input voltage and temperature.

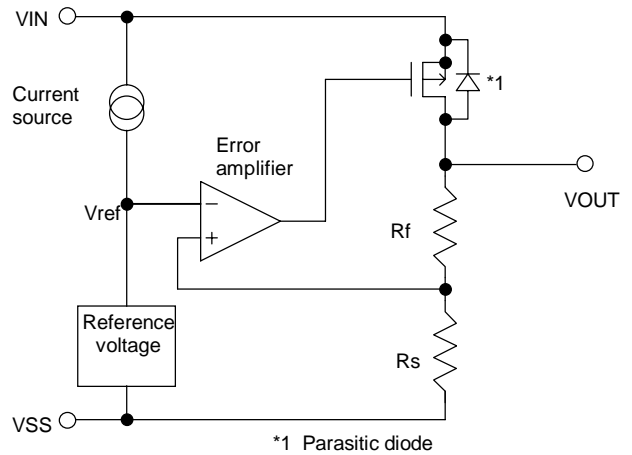


Figure 7 Block Diagram

2. Output transistor

The S-L2980 Series uses a low on-resistance P-channel MOS FET as the output transistor.

Be sure that V_{OUT} does not exceed $V_{IN}+0.3$ V to prevent the voltage regulator from being broken due to inverse current flowing from V_{OUT} pin through a parasitic diode to V_{IN} pin.

3. ON/OFF Pin (Power Off Pin)

This pin starts and stops the regulator.

When the ON/OFF pin is switched to the power off level, the operation of all internal circuits stops, the built-in P-channel MOSFET output transistor between V_{IN} and V_{OUT} is switched off to make current consumption drastically reduced. Sleep mode is thus attained. The V_{OUT} pin becomes the V_{SS} level due to internally divided resistance of several $M\Omega$ between V_{OUT} and V_{SS} .

Furthermore, the structure of the ON/OFF pin is as shown in Figure 8. Since the ON/OFF pin is neither pulled down nor pulled up internally, do not use it in the floating state. In addition, please note that current consumption increases if a voltage of 0.3 V to $V_{IN}-0.3$ V is applied to the ON/OFF pin. When the ON/OFF pin is not used, connect it to the V_{IN} pin in case the logic type is "A" and to the V_{SS} pin in case of "B".

Logic type	ON/OFF pin	Internal circuit	V_{OUT} pin voltage	Current consumption
A	"H" : Power on	Operating	Set value	I_{SS1}
A	"L" : Power off	Stop	V_{SS} level	I_{SS2}
B	"H" : Power off	Stop	V_{SS} level	I_{SS2}
B	"L" : Power on	Operating	Set value	I_{SS1}




Figure 8 ON/OFF Pin

■ Selection of Output Capacitor (C_L)

The S-L2980 series needs an output capacitor between V_{OUT} pin and V_{SS} pin for phase compensation. When a ceramic or OS (Organic Semiconductor) capacitor is used, the capacitance should be 2.2 μF or more. When a tantalum or an aluminum electrolyte capacitor is used, the capacitance should be 2.2 μF or more and the ESR should be 10 Ω or less.

Special attention should be paid when an aluminum electrolyte capacitor is used, since an increase of ESR at low temperature might lead to the oscillation of the regulator. Sufficient performance evaluation including temperature dependency is thus needed.

Overshoot and undershoot characteristics differ depending upon the magnitude of the output capacitor in use. Evaluation in the actual environment is needed.


■ Notice

- Wiring patterns for VIN, VOUT and GND pins should be designed to hold low impedance. When mounting an output capacitor, the distance from the capacitor to the VOUT pin and to the VSS pin should be as short as possible.
- Note that output voltage may increase when a voltage regulator is used at low load current (less than 1 mA).
- To prevent oscillation, it is recommended to use the external components under the following conditions.
 - ◆ Input capacitor : 0.47 μ F or more
 - ◆ Output capacitor (C_L): 2.2 μ F or more
 - ◆ Equivalent Series Resistance (ESR): 10 Ω or less
 - ◆ Input series resistance (RIN): 10 Ω or less
- A voltage regulator may oscillate when the impedance of the power supply is high and the input capacitor is small or not connected.
- The application condition for input voltage, output voltage and load current should not exceed the package power dissipation.
- SII claims no responsibility for any and all disputes arising out of or in connection with any infringement of the products including this IC upon patents owned by a third party.
- In determining output current attention should be paid to the output current value specified in the table for electrical characteristics and the footnote 5) of the table.


■ Typical Characteristics

(1) OUTPUT VOLTAGE versus OUTPUT CURRENT (when load current increases)


S-L2980A15(Ta=25°C)

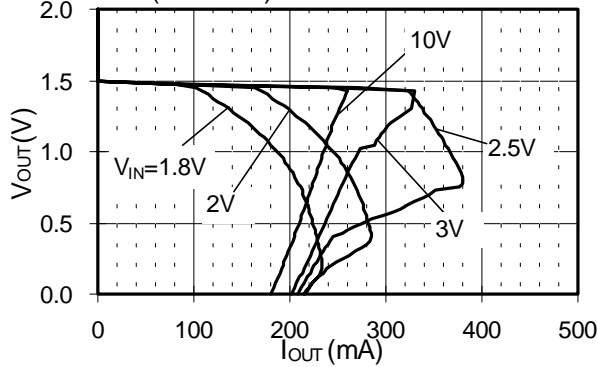

S-L2980A30(Ta=25°C)

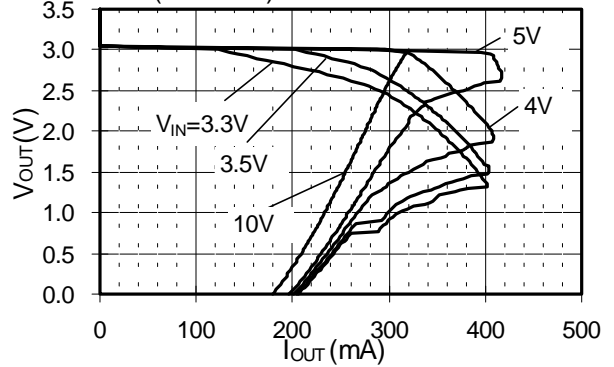


S-L2980A50(Ta=25°C)

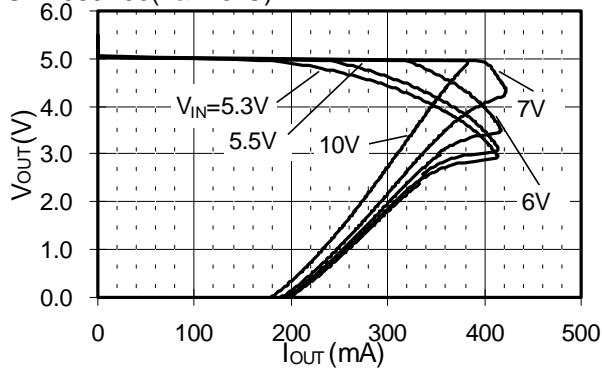


The application condition for input voltage, output voltage and load current should not exceed the package power dissipation. In determining output current attention should be paid to the output current value specified in the table for electrical characteristics and the footnote 5) of the table.

(2) MAXIMUM OUTPUT CURRENT versus INPUT VOLTAGE


S-L2980A15

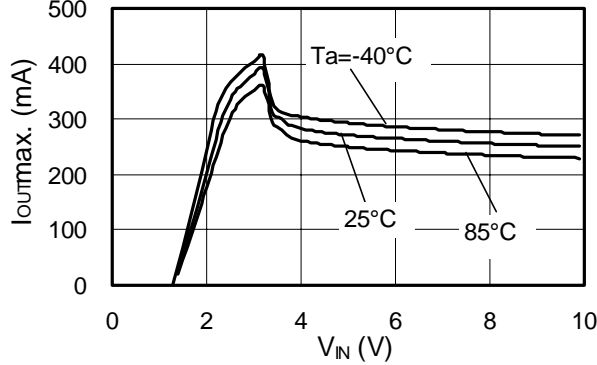

S-L2980A30

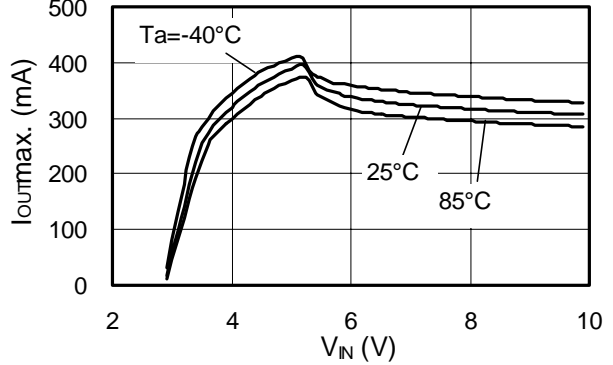


S-L2980A50

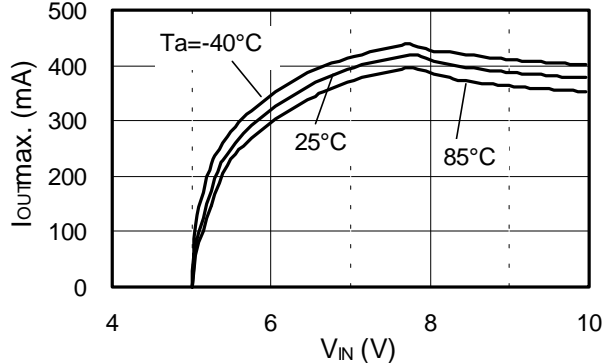


The application condition for input voltage, output voltage and load current should not exceed the package power dissipation. In determining output current attention should be paid to the output current value specified in the table for electrical characteristics and the footnote 5) of the table.

(3) OUTPUT VOLTAGE versus INPUT VOLTAGE


S-L2980A15(Ta=25°C)

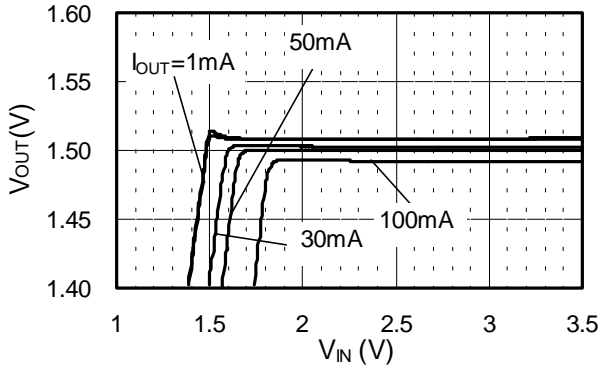

S-L2980A30(Ta=25°C)

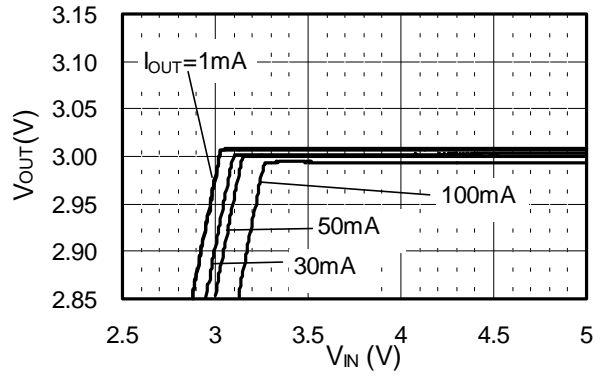


S-L2980A50(Ta=25°C)

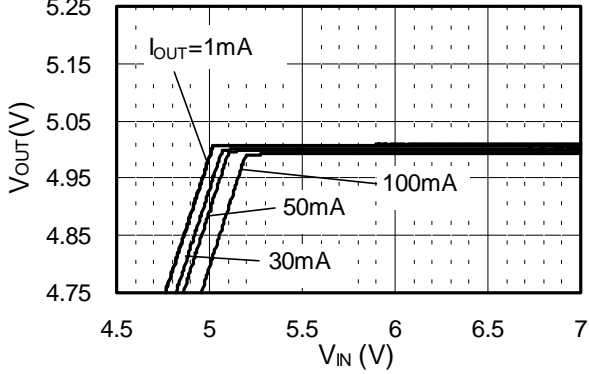


(4) DROPOUT VOLTAGE versus OUTPUT CURRENT


S-L2980A15

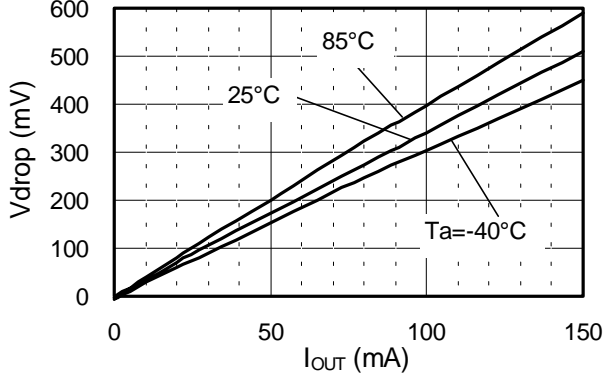

S-L2980A30

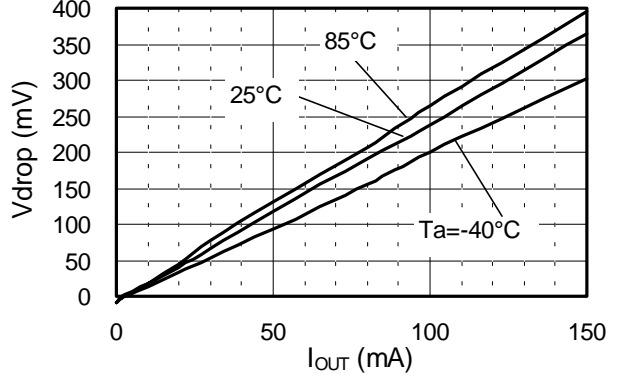

S-L2980A50

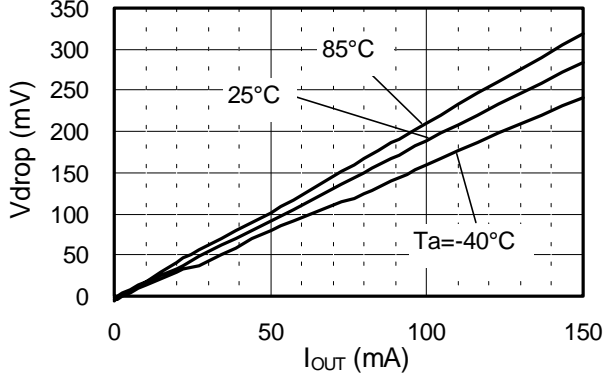


HIGH RIPPLE-REJECTION LOW DROPOUT CMOS VOLTAGE REGULATOR

Rev.1.0


S-L2980 sries

(5) OUTPUT VOLTAGE versus AMBIENT TEMPERATURE


S-L2980A15

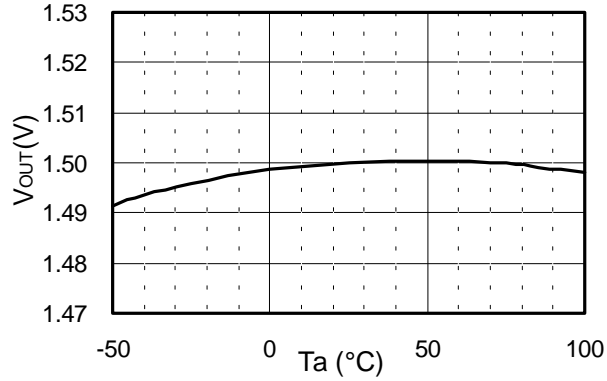


S-L2980A30

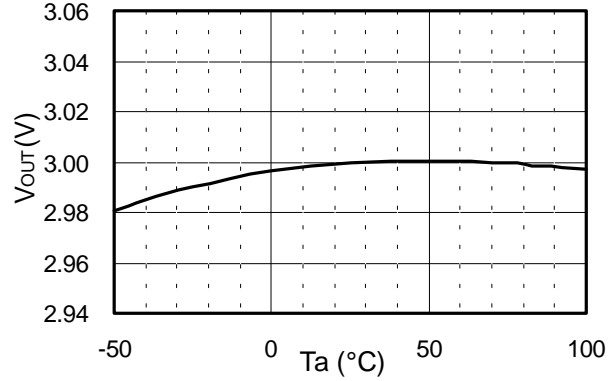


S-L2980A50

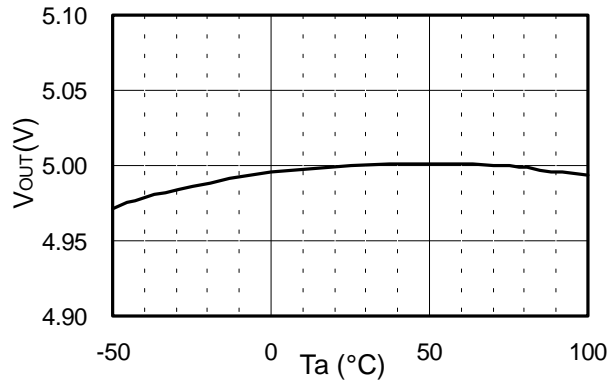


(6) LINE REGULATION versus AMBIENT TEMPERATURE

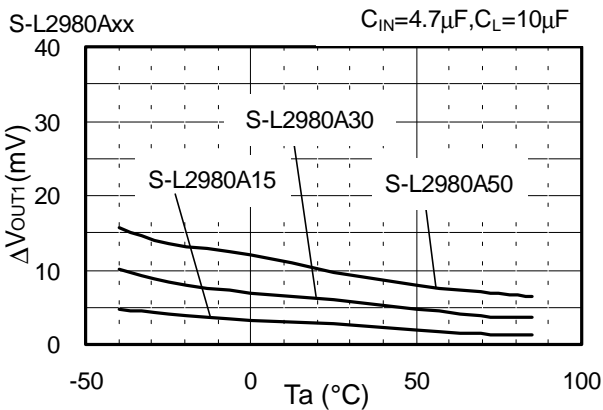




(7) LOAD REGULATION versus AMBIENT TEMPERATURE

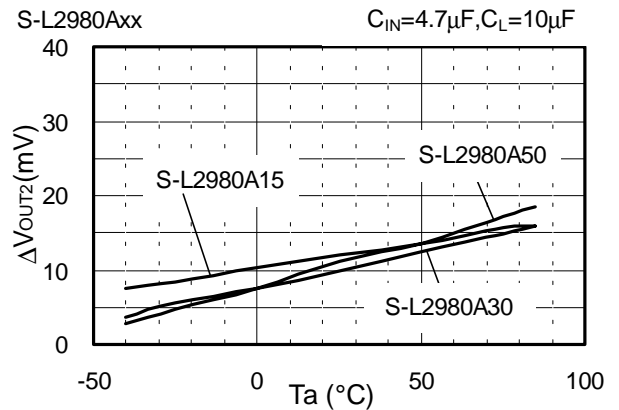



(8) THRESHOLD VOLTAGE OF ON/OFF PIN versus INPUT VOLTAGE

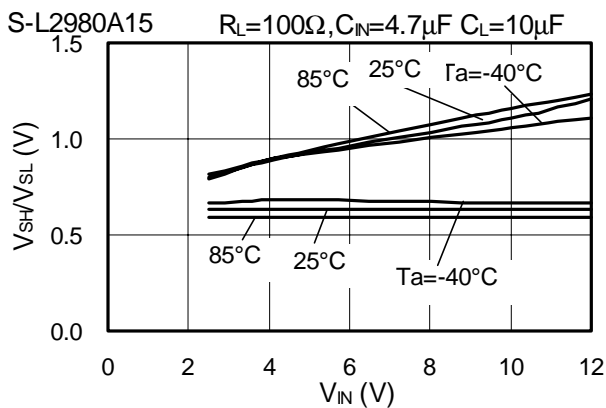

(9) CURRENT CONSUMPTION versus INPUT VOLTAGE

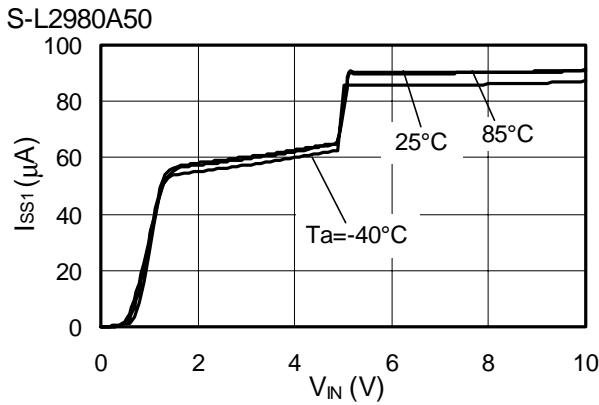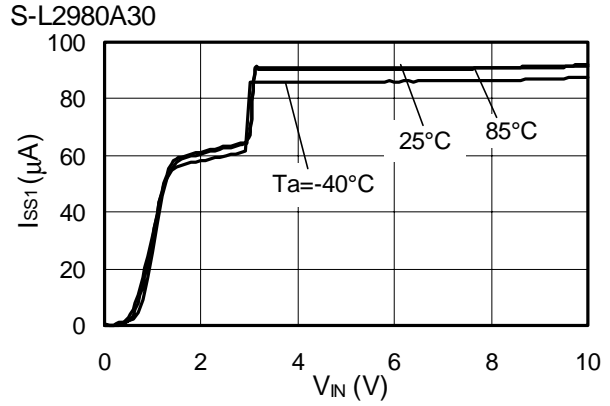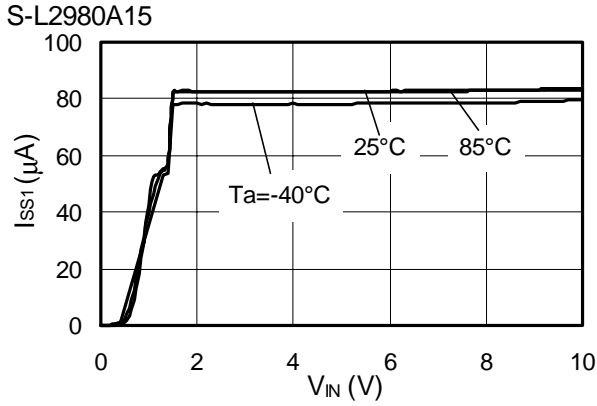


(10) RIPPLE REJECTION

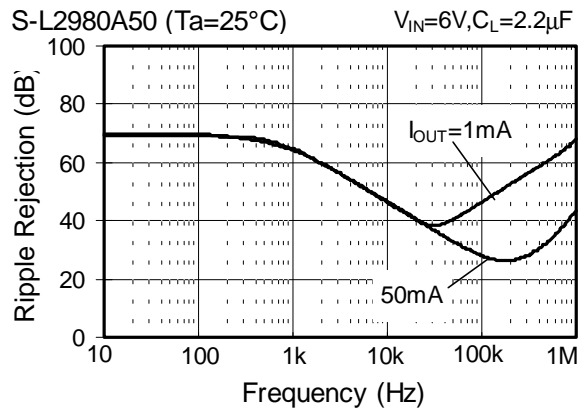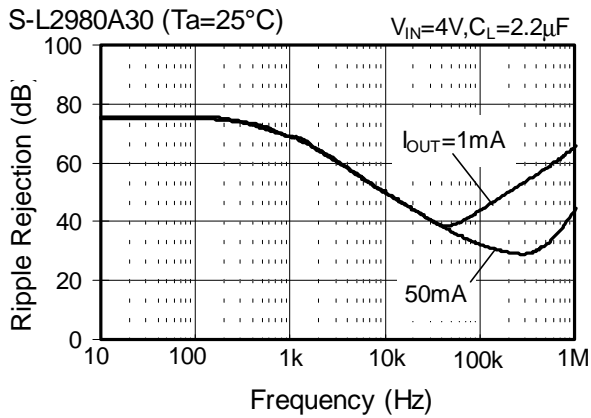


REFERENCE DATA

TRANSIENT RESPONSE CHARACTERISTICS (S-L2890A30MC Typical data: Ta=25°C)

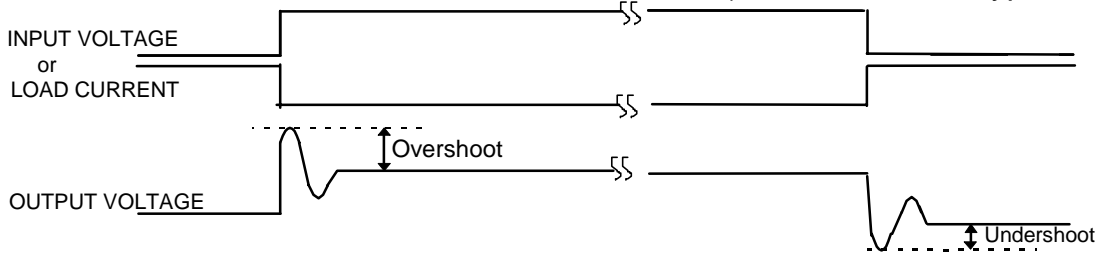


(1) POWER SOURCE FLUCTUATION


Overshoot

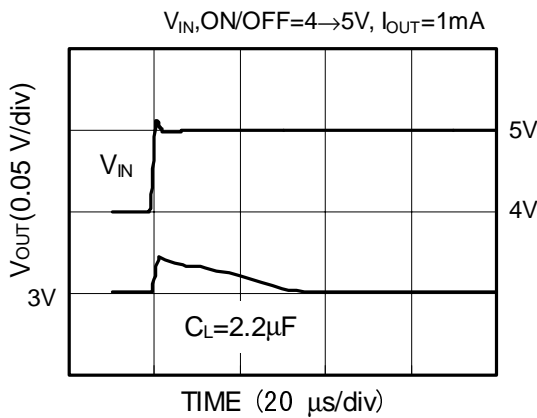


Undershoot

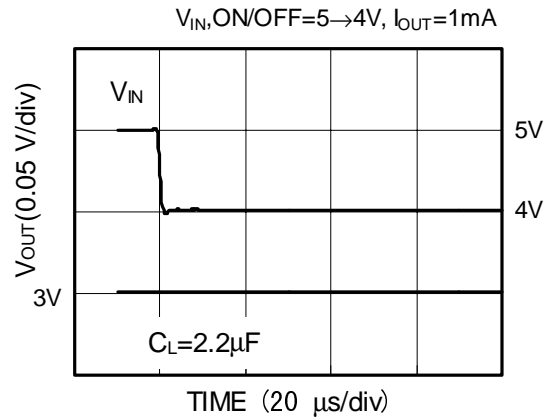

Overshoot

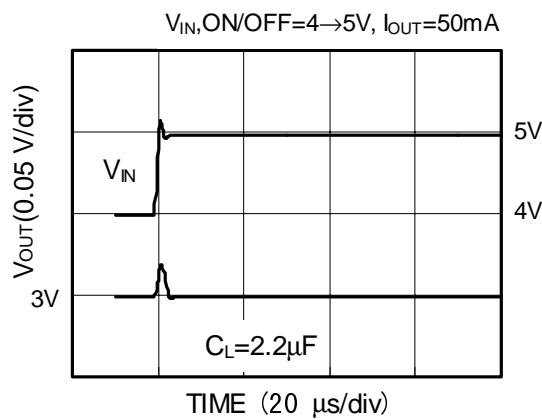


Undershoot

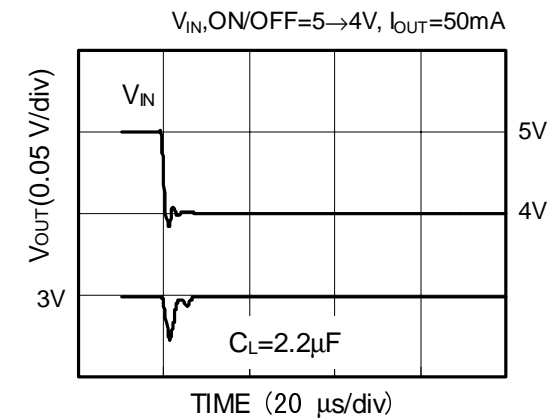


(2) LOAD FLUCTUATION



Overshoot

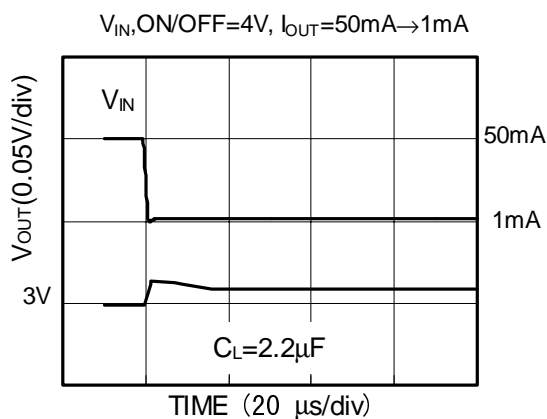

Undershoot

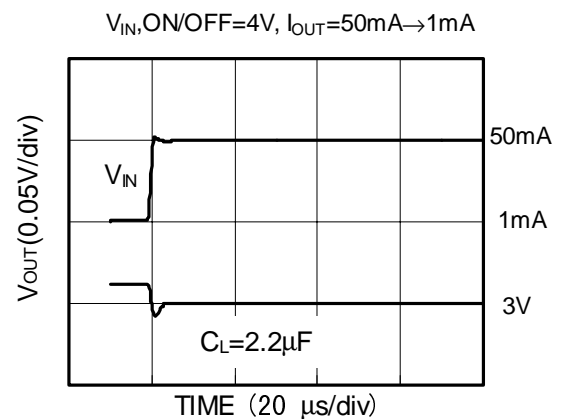


(3) ON/OFF SWITCHING

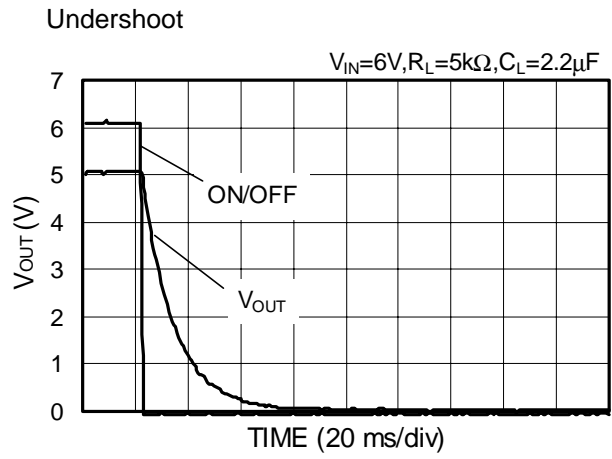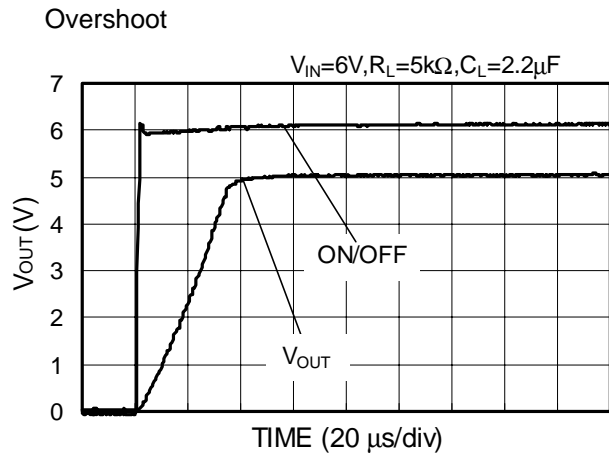



● Dimensions

Unit : mm

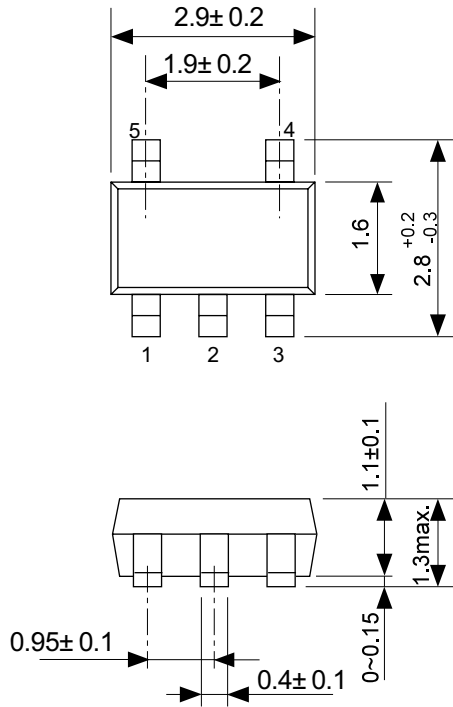

No. MP005-A-P-SD-1.1


● Tape Specifications

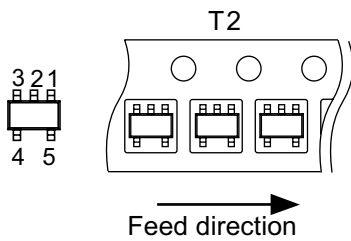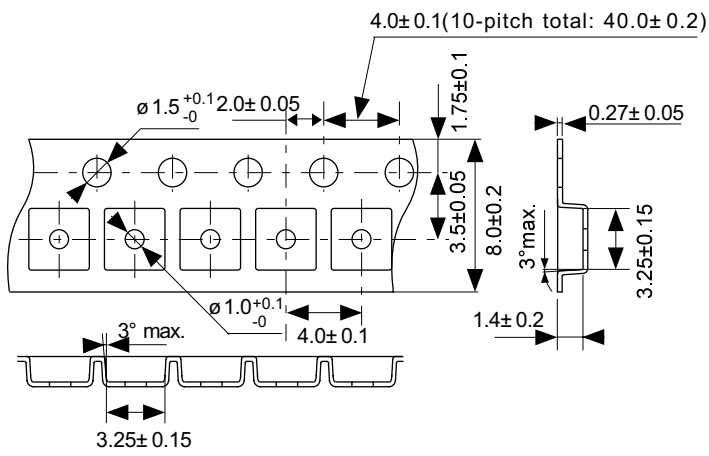

No. MP005-A-C-SD-1.0

● Reel Specifications

3000 pcs./reel

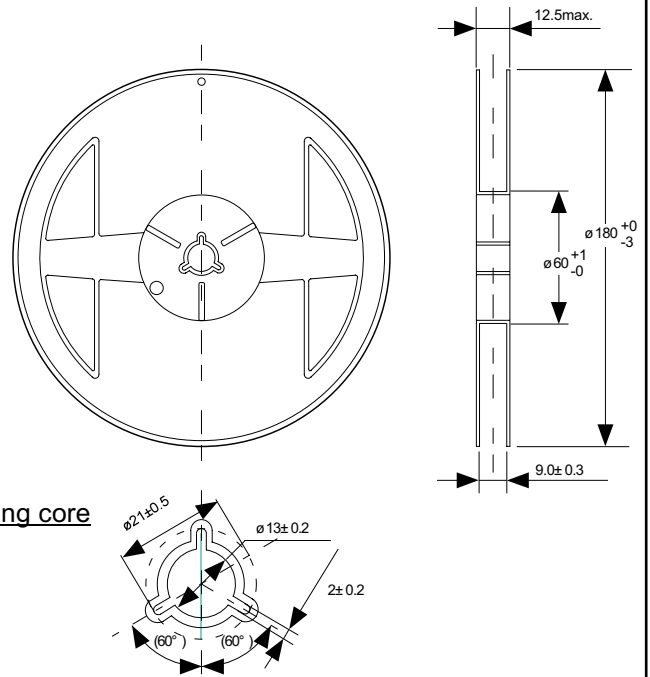


No. MP005-A-R-SD-1.0

5-pin SON(A) [SON5A(2017)]


PN005-A 010323

● Dimensions

Unit:mm

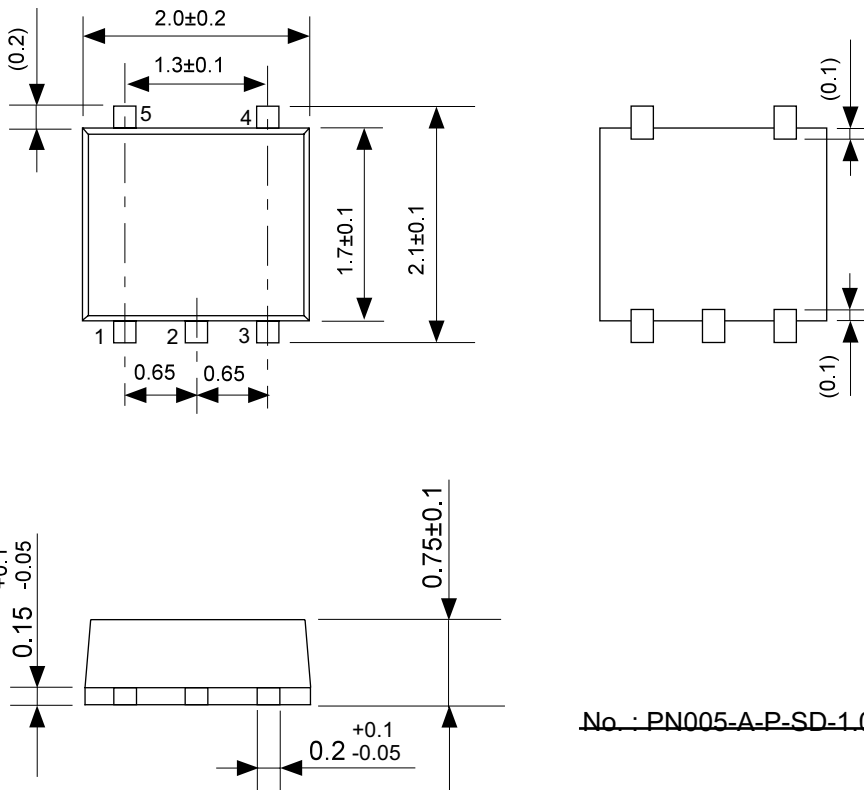


● Taping Specifications

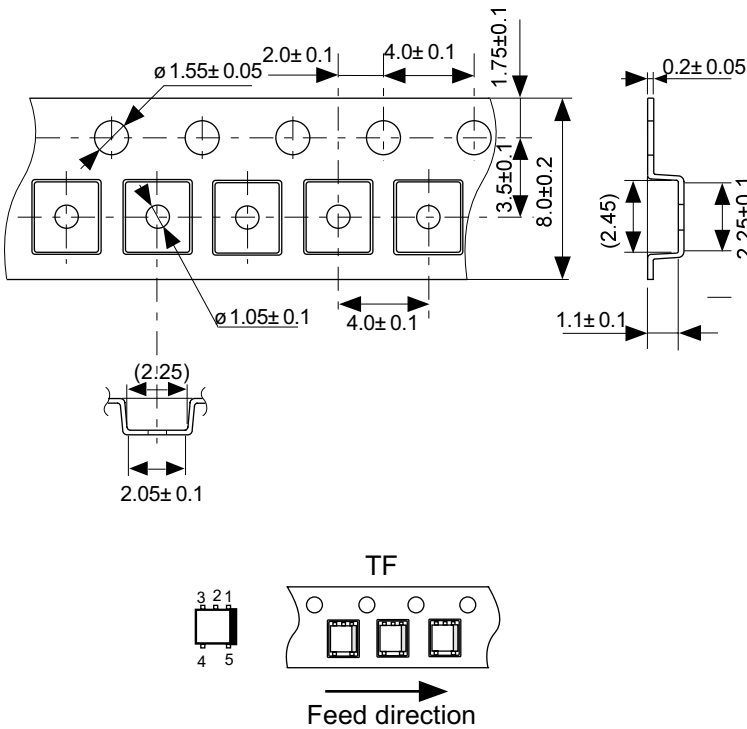

● Reel Specifications

1 reel holds 3000 ICs.

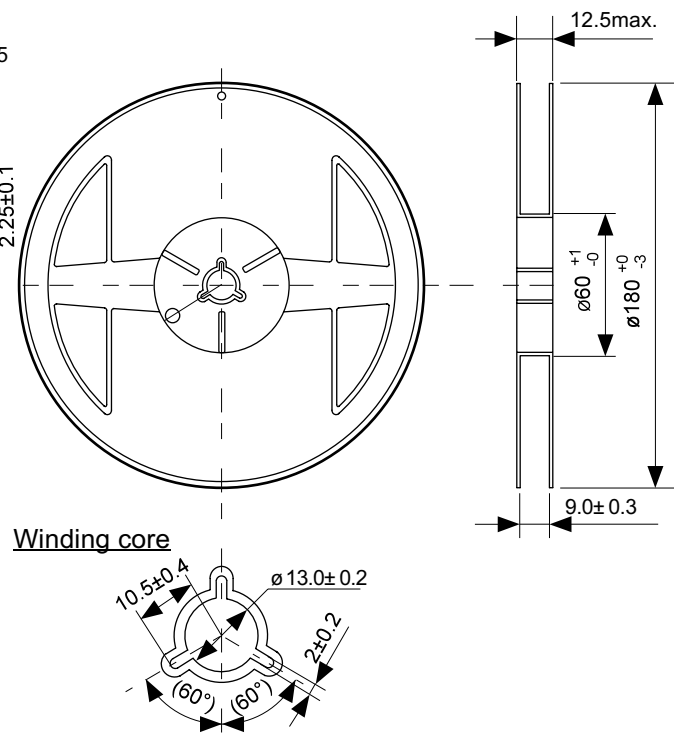


No. PN005-A-C-SD-1.0

No.: PN005-A-R-SD-1.0

■ Markings

● 5-pin SON

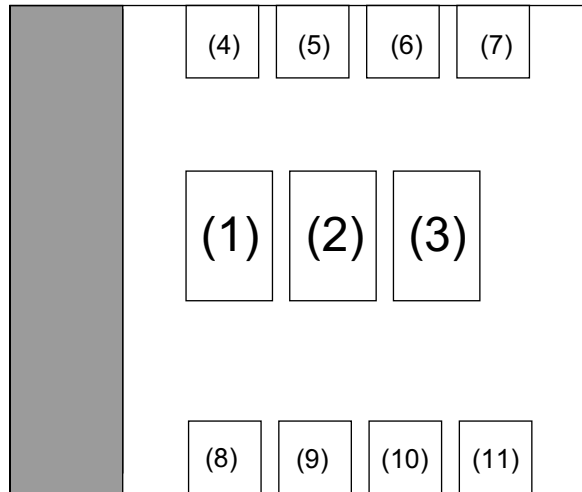


(1) to (3) : Product name

(4) to (11) : Product lot

■ Pin #1 index mark area

No. : PN005 - A - M - SD - 1.0

● SOT-23-5

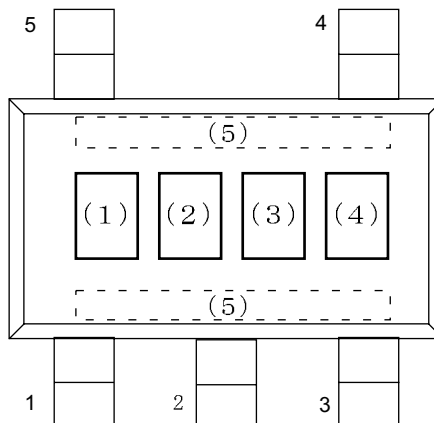

(1) to (3) : Product name (abbreviation)

(4) : Month of assembly

(5) : Dot on one side (Year and week of assembly)

No. : MP005 - A - M - S1 - 1.0

- The information described herein is subject to change without notice.
- Seiko Instruments Inc. is not responsible for any problems caused by circuits or diagrams described herein whose related industrial properties, patents, or other rights belong to third parties. The application circuit examples explain typical applications of the products, and do not guarantee the success of any specific mass-production design.
- When the products described herein are regulated products subject to the Wassenaar Arrangement or other agreements, they may not be exported without authorization from the appropriate governmental authority.
- Use of the information described herein for other purposes and/or reproduction or copying without the express permission of Seiko Instruments Inc. is strictly prohibited.
- The products described herein cannot be used as part of any device or equipment affecting the human body, such as exercise equipment, medical equipment, security systems, gas equipment, or any apparatus installed in airplanes and other vehicles, without prior written permission of Seiko Instruments Inc.
- Although Seiko Instruments Inc. exerts the greatest possible effort to ensure high quality and reliability, the failure or malfunction of semiconductor products may occur. The user of these products should therefore give thorough consideration to safety design, including redundancy, fire-prevention measures, and malfunction prevention, to prevent any accidents, fires, or community damage that may ensue.