



- Recovers a 622.08-MHz Clock Signal From a 622.08-Mbit/s STS-12/STM-4 NRZ Data Stream
- Accepts Pseudo-ECL (PECL) Input Voltage Levels on the Input Data Stream
- Requires a Single 5-V Supply
- Provides PECL-Clock and PECL-Data Outputs

description

The TNETA1622 recovers an embedded clock signal from a 622.08-Mbit/s STS-12/STM-4 nonreturn-to-zero (NRZ) data stream using a frequency/phase-locked loop. The device accepts PECL (ECL signals referenced to 5 V instead of GND) input-voltage levels. The recovered clock and data outputs are PECL compatible. The serial data input and recovered clock and data outputs are differential to provide maximum noise immunity.

The TNETA1622 requires only a positive 5-V supply ($5\text{ V} \pm 5\%$) for operation. The TNETA1622 is characterized for operation over a temperature range of -40°C to 85°C .

functional block diagram

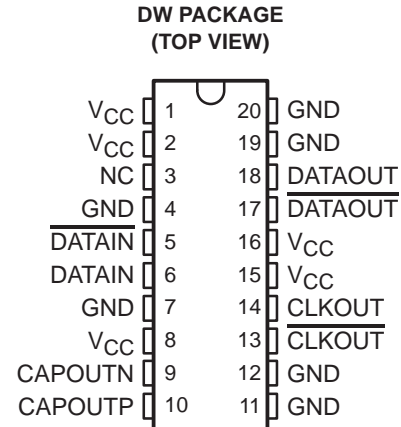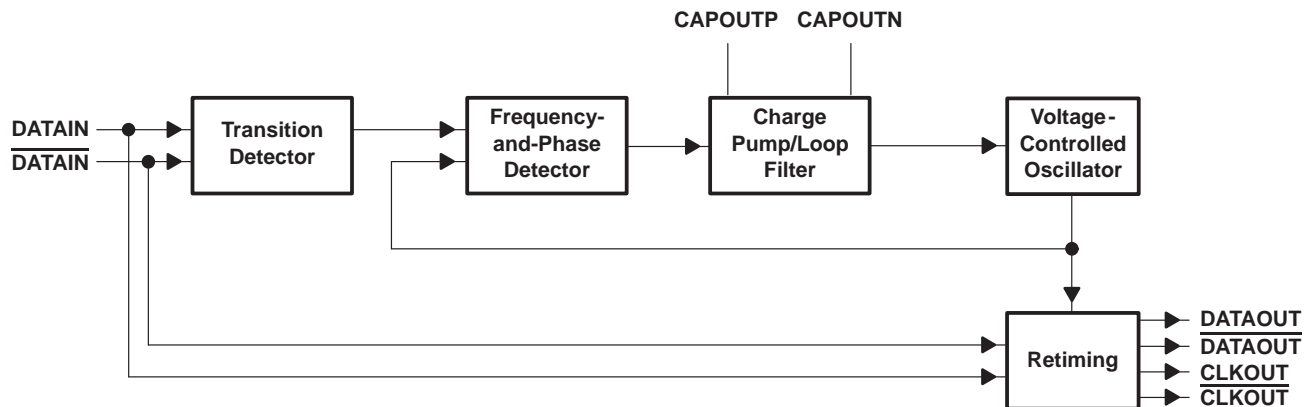

NC – No internal connection

PRODUCT PREVIEW



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

PRODUCT PREVIEW information concerns products in the formative or design phase of development. Characteristic data and other specifications are design goals. Texas Instruments reserves the right to change or discontinue these products without notice.



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

Copyright © 1995, Texas Instruments Incorporated

TNETA1622

622.08-MHz CLOCK-RECOVERY DEVICE

SDNS017C – FEBRUARY 1994 – REVISED DECEMBER 1995

Terminal Functions

TERMINAL		I/O	DESCRIPTION
NAME	NO.		
CAPOUTN CAPOUTP	9 10	I	Capacitor connection for phase-locked-loop filter
CLKOUT	13	O	Recovered clock output, PECL compatible
CLKOUT	14		
DATAIN	5	I	Serial data input, PECL compatible
DATAIN	6		
DATAOUT	17	O	Serial data output, PECL compatible
DATAOUT	18		
GND	4, 7, 11, 12, 19, 20		Ground (0-V reference)
V _{CC}	1, 2, 8, 15, 16		Supply voltage
NC	3		No connection. Leave floating (open).

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V _{CC} (see Note 1)	–0.5 V to 7 V
Input voltage range, V _I , PECL	0 V to 7 V
Power dissipation	562 mW
Operating free-air temperature range, T _A	–40°C to 85°C
Storage temperature range, T _{stg}	–65°C to 150°C

† Stresses beyond those listed under “absolute maximum ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “recommended operating conditions” is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTE 1: All voltage values are with respect to the GND terminals.

recommended operating conditions

		MIN	NOM	MAX	UNIT	
V _{CC}	Supply voltage	4.75	5	5.25	V	
V _{IH}	High-level input voltage	PECL (see Note 2)		V _{CC} –1.15	V _{CC} –0.80	V
V _{IL}	Low-level input voltage	PECL (see Note 2)		V _{CC} –1.90	V _{CC} –1.50	V
T _A	Operating free-air temperature	–40		85	°C	

NOTE 2: The algebraic convention, in which the least positive (most negative) value is designated minimum, is used in this data sheet for logic-level voltages only.

PRODUCT PREVIEW



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

electrical characteristics over recommended ranges of operating free-air temperature and supply voltage (unless otherwise noted) (see Figure 1)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
V _{OH}	High-level output voltage	DATAOUT, DATAOUT V _{CC} = 4.75 V to 5.25 V, See Notes 2 and 3	V _{CC} -1.03		V _{CC} -0.85	V
V _{OL}	Low-level output voltage	DATAOUT, DATAOUT V _{CC} = 4.75 V to 5.25 V, See Notes 2 and 3	V _{CC} -1.85		V _{CC} -1.62	V
V _{OH}	High-level output voltage	CLKOUT, CLKOUT V _{CC} = 5 V		V _{CC} -1.0		V
V _{OL}	Low-level output voltage	CLKOUT, CLKOUT V _{CC} = 5 V		V _{CC} -1.6		V
V _{O(PP)}	Output voltage swing, PECL	CLKOUT, CLKOUT V _{CC} = 4.75 V to 5.25 V, See Note 3	400			mV
I _{IH}	High-level input current	DATAIN, DATAIN V _{CC} = 5.25 V, V _I = 4.45 V				μA
I _{IL}	Low-level input current	DATAIN, DATAIN V _{CC} = 5.25 V, V _I = 3.35 V				μA
I _{CC}	Supply current	V _{CC} = 5.25 V, f = 622.08 Mbit/s, Outputs open			107	mA
		V _{CC} = 5.25 V, f = 622.08 Mbit/s, See Note 4			107	

- NOTES: 2. The algebraic convention, in which the least positive (most negative) value is designated minimum, is used in this data sheet for logic-level voltages only.
3. PECL outputs are terminated through a 50-Ω resistor to V_{CC} - 2 V.
4. CLKOUT, CLKOUT, DATAOUT, and DATAOUT each are terminated with a 50-Ω resistor to V_{CC} - 2 V.

operating characteristics over recommended operating free-air temperature range (unless otherwise noted) (see Figure 1)

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Acquisition time	See Note 5				ms
Deviation of clock-sampling point, t _{csp}	See Figure 1				ps
RMS jitter, recovered clock	See Note 6				ps
Peak-to-peak jitter, recovered clock					ps
Input data rate			622.08		Mbit/s
Duty cycle, recovered clock	See Note 3	45%		55%	
Maximum number of consecutive bits (1 or 0) in input data stream	See Note 7				


- NOTES: 3. PECL outputs are terminated through a 50-Ω resistor to V_{CC} - 2 V.
5. Acquisition time is the time required to achieve a valid clock output while applying a 2⁷ - 1 pseudo-random bit sequence.
6. RMS jitter is measured with a 2³¹ - 1 pseudo-random bit sequence.
7. This measurement is made with a 2¹³ - 1 pseudo-random bit sequence with string substitution.

PRODUCT PREVIEW


TNETA1622 622.08-MHz CLOCK-RECOVERY DEVICE

SDNS017C – FEBRUARY 1994 – REVISED DECEMBER 1995

PARAMETER MEASUREMENT INFORMATION

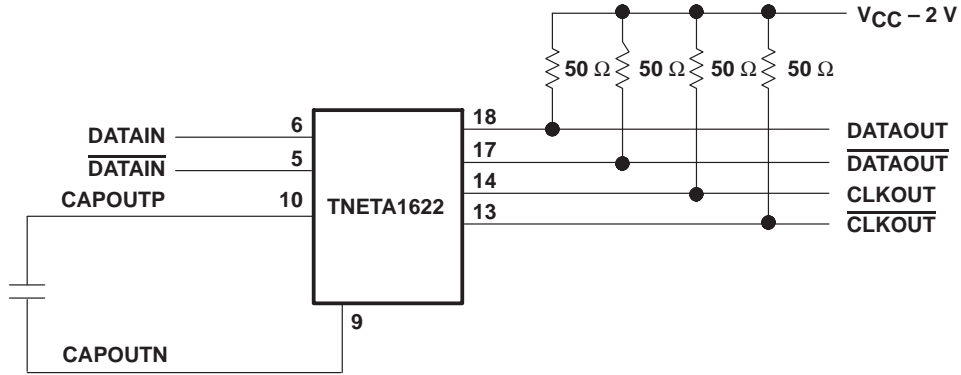

LOAD CIRCUIT

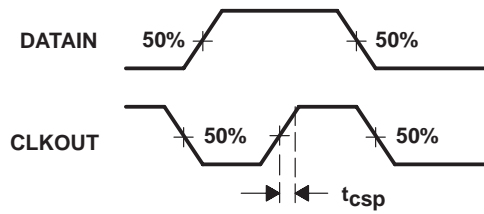

VOLTAGE WAVEFORMS

Figure 1. Load Circuit and Voltage Waveforms

PRODUCT PREVIEW

IMPORTANT NOTICE

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.