Model 40305

Power Dividers

In-Phase, 3-Way

Applications

- Wilkinson Networks
- Power Amplifiers
- DCS and PCS frequencies
- Channel Combining
- Base Stations / Wireless Infrastructure

Features

- Commercial Grade
- 3 Way Power Split
- In Phase
- Low Loss
- Flush Mounting
- Lightweight
- 100% Tested

Electrical Specifications

Frequency *GHz*	Isolation *dB Min/Typ*	Insert. Loss *dB Max*	Return Loss *dB Min*
1.7 - 2.0	20	0.25	20

Amp. Bal. *dB Max*	Phase Bal. *Degrees Max*	Load Dissipation *Watts*
±0.20	±2.0	0.750

Notes: Electrical And Mechanical Specifications subject to change without notice. Impedance: 50 ohms nominal. Meets MIL-E-5400 Class 3 requirements.

Outline Drawing

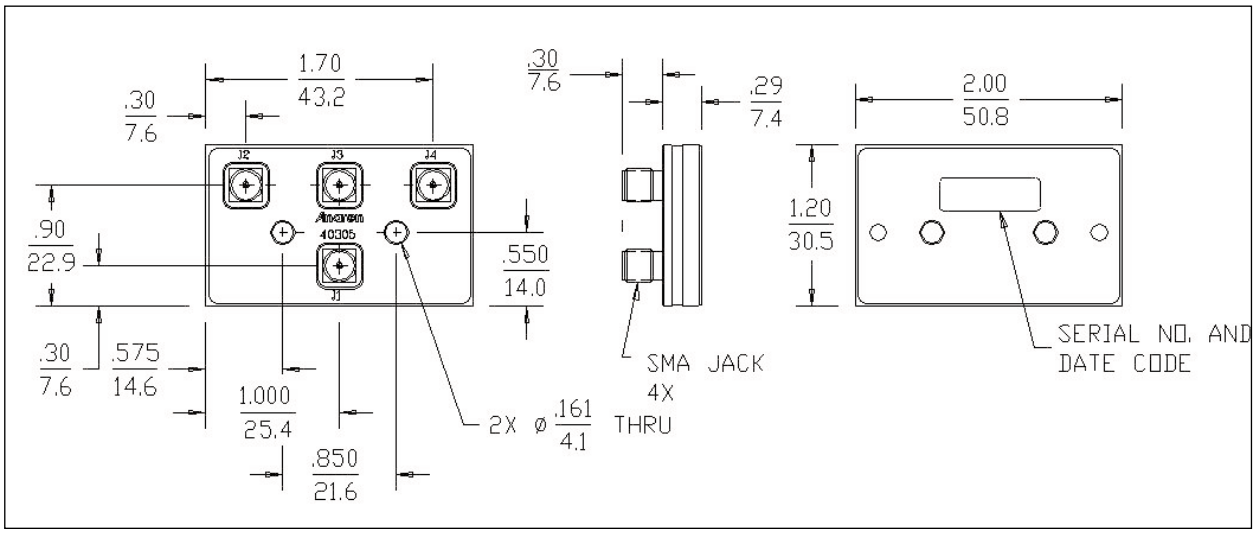

Sales Desk USA: Voice: **(800) 544-2414** Fax: **(315) 432-9121**
Sales Desk Europe: Voice: **(+44) 23 92 232392** Fax: **(+44) 23 92 251369**

Anaren
What'll we think of next?™