

Features


- Temperature-compensated:
50 ppm/ $^{\circ}$ C
- Trimmed 0.5% typical bandgap reference
- High gain Internal amplifier with 100 mA capability
- Nominal temperature range extended to 105 $^{\circ}$ C
- Low frequency dynamic output impedance: < 150 m Ω
- Low output noise

Description

The AS534 is a three terminal adjustable shunt regulator utilizing an accurate 1.25V bandgap reference. The AS534 is functionally similar to an AS432 except that the reference and amplifier operate off of a separate supply from the output, allowing very low output voltages (0.1V Typically)


Because of its robust bipolar technology, the AS534 handles a wide range of current, and holds off up to 18V so its use is not limited to low power, low voltage systems. Significant care has been taken to provide adequate AC bandwidth to allow the AS534 as an amplifier in control systems and power electronics. ASTEC also offers a 1.0% version of this part, the A534.

Pin Configuration — Top view

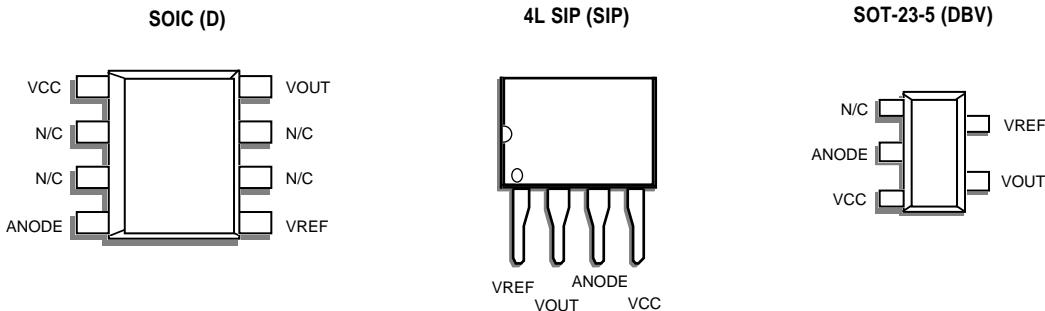

Ordering Information

Description	Temperature Range	0.5%	Order Codes	1.0%
8-Pin Plastic SOIC	0 to 105 $^{\circ}$ C	AS534D	A534D	
4-Pin Plastic SIP	0 to 105 $^{\circ}$ C	AS534SIP	A534SIP	
SOT - 23 - 5	0 to 105 $^{\circ}$ C	AS534DBV	A534DBV	

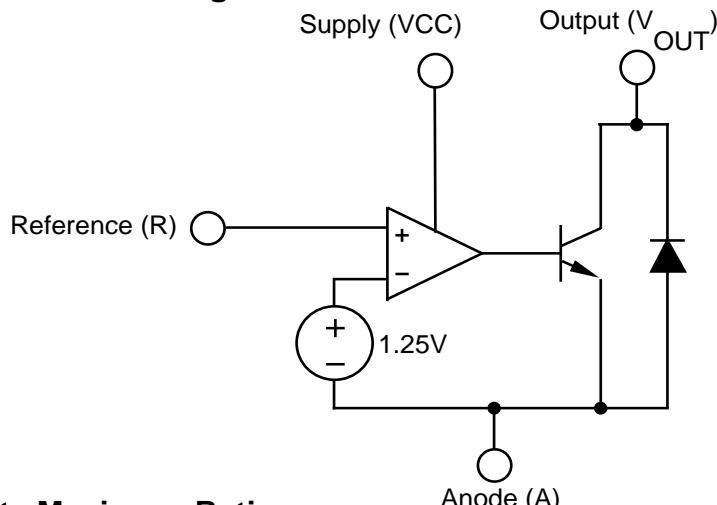Functional Block Diagram**Absolute Maximum Ratings**

Parameter	Symbol	Rating	Units
Supply Voltage	V _{CC}	18	V
Output Voltage	V _{OUT}	18	V
Anode-V _{OUT} Forward Current	I _{AO}	1	A
Operating Output Current	I _{OUT}	100	mA
Reference Input Current	I _{REF}	1	mA
Continuous Power at 25° C	P _D		
8L SOIC		750	mW
4L SIP		1000	mW
SOT-23-5		200	mW
Junction Temperature	T _J	150	°C
Storage Temperature	T _{STG}	-65 to 150	°C
Lead Temperature (Soldering 10 sec.)	T _L	300	°C

Stresses greater than those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

Recommended Conditions

Parameter	Symbol	Rating	Unit
Output Voltage	V _{OUT}	-0.2 to 18	V
Output Current	I _{OUT}	10	mA

Typical Thermal Resistances

Package	θ _{JA}	θ _{JC}	Typical Derating
SOIC	175° C/W	45° C/W	5.7 mW/°C
SIP	95° C/W	50° C/W	10.5 mW/°C
SOT-23-5	575° C/W	150° C/W	1.7 mW/°C

Electrical Characteristics


Electrical characteristics are guaranteed over the full junction temperature range (0-105 °C). Ambient temperature must be derated based upon power dissipation and package thermal characteristics. Unless otherwise stated, test conditions are: $V_{OUT}=V_{REF}$, $VCC=5V$ and $I_{OUT}=1\text{ mA}$.

Parameter	Symbol	Test Condition	A534 (1.0 %)			AS534 (0.5 %)			Units
			Min	Typ	Max	Min	Typ	Max	
Supply Voltage	VCC		2.8		15	2.8		15	V
Supply Current	ICC			0.5	1		0.5	1	mA
Reference Voltage	V_{REF}	$T_J = 25^\circ C$	1.238	1.250	1.263	1.244	1.250	1.256	V
Line Regulation	ΔV_{OUT}	$VCC = 2.8 \text{ to } 15\text{ V}$		-1	-10		-1	-10	mV
Load Regulation	ΔV_{OUT}	$I_{OUT} = 1 \text{ to } 100\text{ mA}$		1	50		1	50	mV
Temperature Deviation	ΔV_{OUT}	$0 < T_J < 105^\circ C$		3	10		3	8	mV
Reference Input Current	I_{REF}			0.1	0.4		0.1	0.4	μA
Amplifier open loop gain	A_v		70	80		70	80		dB
Amplifier Unity gain frequency	F_1	$C_{LOAD} < 1\text{nF}$	1	2		1	2		MHz
Output Saturation Voltage	V_{SAT}	$I_{OUT}=100\text{mA}$			0.4			0.4	V
Off State Leakage	I_{LEAK}	$V_{REF} = 0\text{ V}, V_{OUT} = 15\text{ V}$		0.04	500		0.04	500	nA

*Temperature deviation is defined as the maximum deviation of the reference over the given temperature range and does not imply an incremental deviation at any given temperature.

Typical Performance Curves

*Calculating Average Temperature Coefficient (TC)

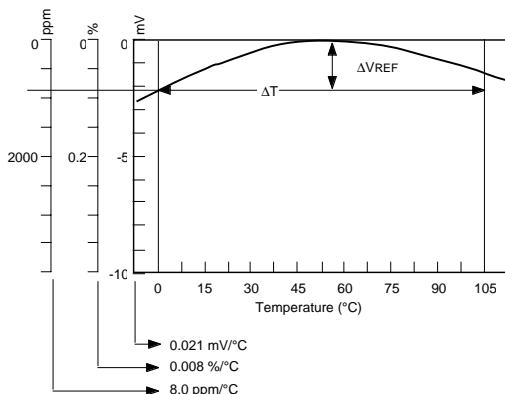

$$\bullet \text{ TC in } \text{mV/}^\circ\text{C} = \frac{\Delta V_{REF}}{\Delta T_A} \quad (\text{mV})$$

$$\bullet \text{ TC in } \%/\text{ }^\circ\text{C} = \left(\frac{\Delta V_{REF}}{V_{REF} \text{ at } 25^\circ\text{C}} \right) \times 100$$

$$\bullet \text{ TC in } \text{ppm/}^\circ\text{C} = \left(\frac{\Delta V_{REF}}{V_{REF} \text{ at } 25^\circ\text{C}} \right) \times 10^6$$