


# **SI-3003**KWF

## 1 A, Low-Dropout, Dual Output, 1.8 V & 2.5 V Regulator



\* Output current rating is limited by input voltage, duty cycle, and ambient temperature. Under any set of conditions, do not exceed a junction temperature of +125°C.

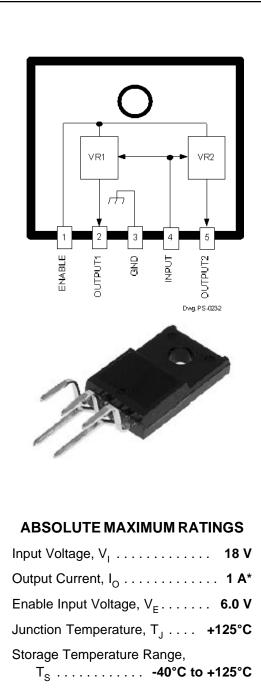

Designed to meet the high-current requirements in industrial and consumer applications; embedded core, memory, or logic supplies; TVs, VCRs, and office equipment, the SI-3003KWF voltage regulator offers the reduced dropout voltage and low quiescent current essential for improved efficiency. This device delivers dual regulated outputs at up to 1 A. Integrated thermal and overcurrent protection enhance overall system reliability. Devices with other output voltages are also available.

Quiescent current does not increase significantly as the dropout voltage is approached, an ideal feature in standby/resume power systems where data integrity is crucial. Regulator accuracy and excellent temperature characteristics are provided by a bandgap reference. An LS-TTL/CMOS-compatible input gives the designer complete control over power up, standby, or power down. A pnp pass element provides a dropout voltage of less than 600 mV at 1 A of load current. Low output voltages eliminate the need for expensive PWM buck converters. The low dropout voltage permits more efficient regulation before output regulation is lost.

This device is supplied in a fully molded TO-220-style 5-lead flange-mounted , high power, isolated plastic package. Similar devices in a lower-power surface-mount plastic package are the SI-3003KWD and SI-3003KWM.

#### FEATURES

- 1 A Output Current per Channel
- 0.6 V Maximum Dropout Voltage at  $I_0 = 1 A$
- Fast Transient Response
- 1.5 mA Maximum Standby Current
- Foldback Current Limiting
- Thermal Protection

#### APPLICATIONS


- TVs, VCRs, Electronic Games
- Embedded Core, Memory, or Logic Supplies
- Printers and Other Office Equipment
- Industrial Machinery
- Secondary-Side Stabilization of Multi-Output SMPS

Always order by complete part number, e.g., SI-3003KWF,


Sanken Power Devices from Allegro MicroSystems





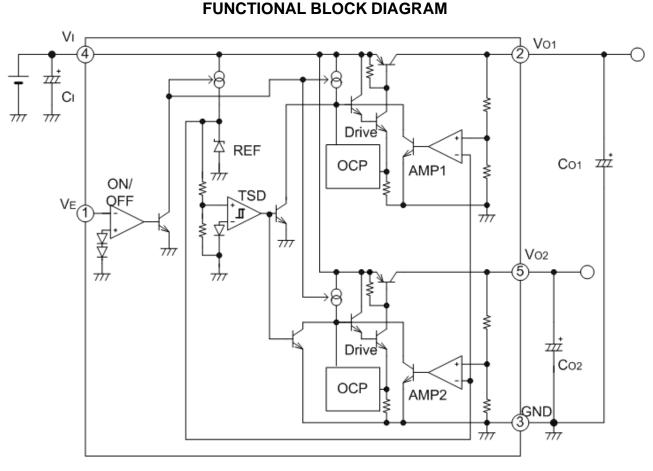

#### Allowable Package Power Dissipation



#### **Recommended Operating Conditions**

	Min	Max	Units
DC Output Current	0	1	А
Operating Ambient Temp.	-30	+85	°C
Operating Junction Temp.	-20	+100	°C

For the availability of parts meeting -40°C requirements, contact Allegro's Sales Representative.

This data sheet is based on Sanken data sheet SSJ-02081A.



115 Northeast Cutoff, Box 15036 Worcester, Massachusetts 01615-0036 Copyright © 2004, 2005 Allegro MicroSystems, Inc.






#### **ELECTRICAL CHARACTERISTICS** at $T_A = +25^{\circ}$ C, $V_E = 2$ V (unless otherwise noted).

			Limits			
Characteristic	Symbol	Test Conditions	Min.	Тур.	Max.	Units
Channel 1						
Output Voltage	V <sub>01</sub>	V <sub>I</sub> = 3.3 V, I <sub>O1</sub> = 10 mA	2.450	2.500	2.550	V
	V <sub>O1(off)</sub>	$V_{E} = 0 V$	—	—	0.5	V
Output Volt. Temp. Coeff.	a <sub>vo1</sub>	$0^{\circ}C \leq T_{J} \leq 100^{\circ}C$	_	±0.3	_	mV/°C
Output Short-Circuit Current	I <sub>OM1</sub>	$V_1 = 3.3 V$ , See note	1.2	_	_	Α
Line Regulation	$\Delta V_{O(\Delta VI)1}$	V <sub>I</sub> = 3.2 V ~ 5.0 V, I <sub>O1</sub> = 10 mA	_		20	mV
Load Regulation	$\Delta V_{O(\Delta IO)1}$	V <sub>I</sub> = 3.3 V, I <sub>01</sub> = 0 A ~ 1.0 A	—	_	30	mV
Dropout Voltage	V <sub>Imin</sub> - V <sub>O1</sub>	I <sub>01</sub> = 1.0 A	_	_	0.6	V
Ripple Rejection Ratio	PSRR	$V_{_{I}}$ = 3.3 V, 100 Hz $\leq$ f $\leq$ 120 Hz	_	60	_	dB
Channel 2						
Output Voltage	V <sub>O2</sub>	V <sub>I</sub> = 3.3 V, I <sub>O2</sub> = 10 mA	1.764	1.800	1.836	V
	V <sub>O2(off)</sub>	$V_{\rm E} = 0 \ V$	_		0.5	V
Output Volt. Temp. Coeff.	a <sub>vo2</sub>	$0^{\circ}C \leq T_{J} \leq 100^{\circ}C$	_	±0.3	_	mV/°C
Output Short-Circuit Current	I <sub>OM2</sub>	$V_{I} = 3.3 V$ , See note	1.2	_	_	А
Line Regulation	$\Delta V_{O(\Delta VI)2}$	$V_1 = 3.2 \text{ V} \sim 5.0 \text{ V}, I_{O2} = 10 \text{ mA}$	_	_	20	mV
Load Regulation	$\Delta V_{O(\Delta IO)2}$	V <sub>1</sub> = 3.3 V, I <sub>02</sub> = 0 A ~ 1.0 A	_	_	30	mV
Dropout Voltage	V <sub>Imin</sub> - V <sub>O2</sub>	I <sub>O2</sub> = 1.0 A	_	_	0.6	V
Ripple Rejection Ratio	PSRR	$V_{_{I}}$ = 3.3 V, 100 Hz $\leq$ f $\leq$ 120 Hz	_	60	_	dB
Logic	<u> </u>		•			
Ground Terminal Current	I <sub>GND</sub>	$V_{I} = 3.3 \text{ V}, I_{O} = 0 \text{ mA}, V_{E} = 2.0 \text{ V}$	_	1.0	1.5	mA
		V <sub>1</sub> = 3.3 V, V <sub>E</sub> = 0 V	_		0.5	mA
Enable Input Voltage	V <sub>EH</sub>	Output ON	2.0		_	V
	V <sub>EL</sub>	Output OFF	_		0.8	V
Enable Input Current	I <sub>EH</sub>	V <sub>E</sub> = 2.7 V	—	0	5.0	μA
	I <sub>EL</sub>	V <sub>E</sub> = 0.4 V		-12	-100	μA
Thermal Shutdown	TJ	I <sub>0</sub> = 10 mA	135	150		°C

Typical values are given for circuit design information only.

Note: Output short-circuit current is at point where output voltage has decreased 5%.

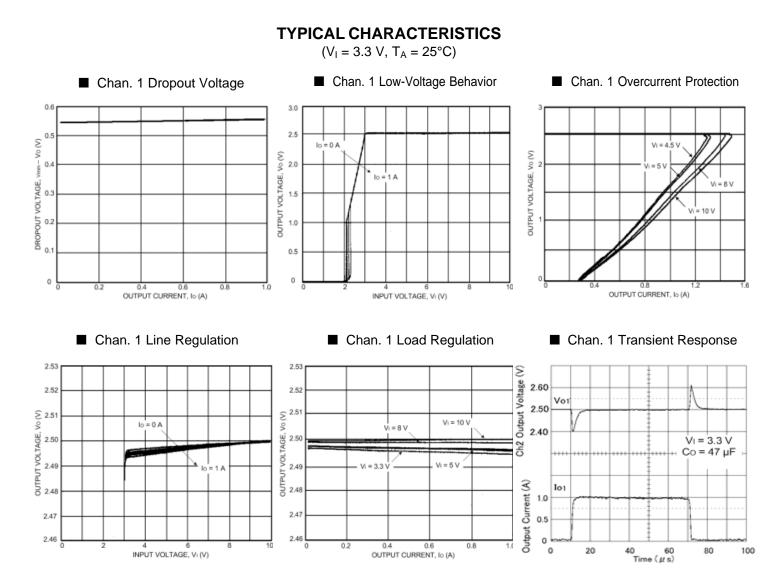


Allegro®

115 Northeast Cutoff, Box 15036 Worcester, Massachusetts 01615-0036



Lineal tors Regulators

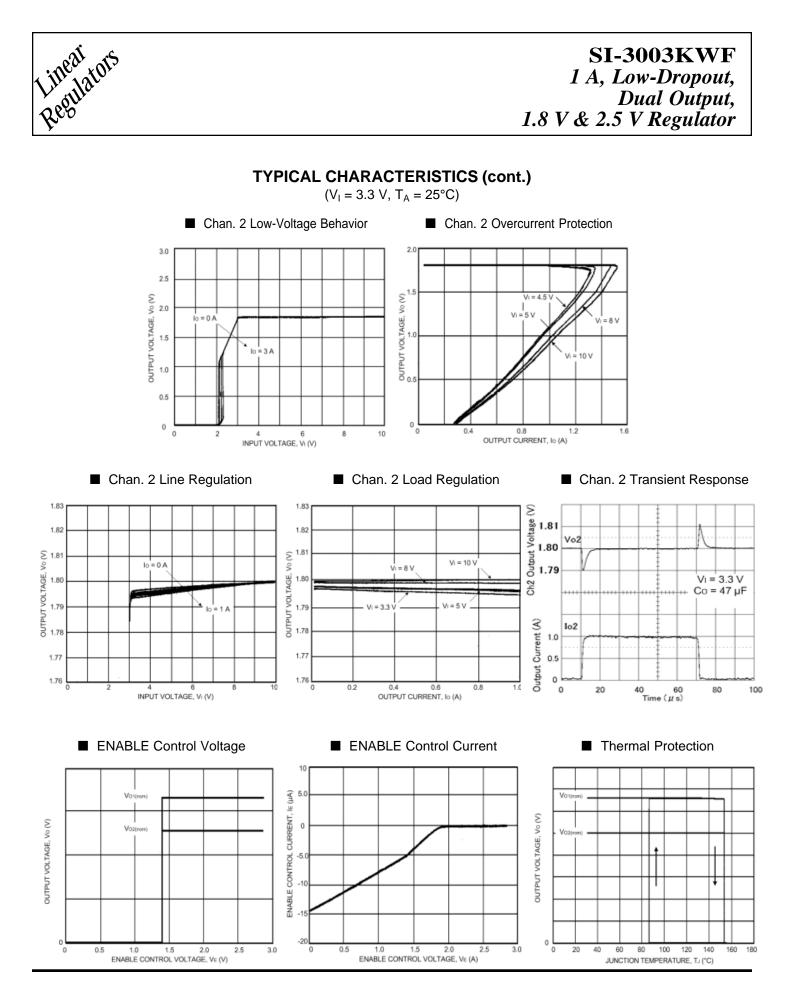

www.allegromicro.com



#### **APPLICATIONS INFORMATION**

**Input Capacitor** (C<sub>1</sub>,  $0.1 \sim 10 \ \mu$ F). This is necessary either when the input line includes inductance or when the wiring is long.

**Output Capacitor** ( $C_0$ , >22  $\mu$ F). This device is not designed for a use with a very low ESR output capacitor such as a ceramic capacitor. Output oscillation may occur with that kind of capacitor.

**ENABLE Input.** The ENABLE (control) input features an internal pull-up resistor. Leaving this input open causes the output to turn on.

**Parallel Operation.** Parallel operation to increase load current is not permitted.

**Determination of DC Input Voltage.** The minimum input voltage  $V_I(min)$  should be higher than the sum of the fixed output voltage and the maximum rated dropout voltage.

**Overcurrent Protection.** The SI-3000KWF series has a built-in fold-back type overcurrent protection circuit, which limits the output current at a start-up mode. It thus cannot be used in applications that require current at the start-up mode such as:

(1) constant-current load,

(2) power supply with positive and negative outputs to common load (a center-tap type power supply), or(3) raising the output voltage by putting a diode or a resistor between the device ground and system ground.

**Thermal Protection.** Circuitry turns off the pass transistor when the junction temperature rises above 135°C. It is intended only to protect the device from failures due to excessive junction temperatures and should not imply that output short circuits or continuous overloads are permitted.

**Heat Radiation and Reliability.** The reliability of the IC is directly related to the junction temperature  $(T_J)$  in its operation. Accordingly, careful consideration should be given to heat dissipation.

The inner frame on which the integrated circuit is mounted is connected to the GND terminal (pin 3). Therefore, it is very effective for heat radiation to enlarge the copper area that is connected to the GND terminal. The graph on page 2 illustrates the effect of thermal resistance on the allowable package power dissipation.

The junction temperature  $(T_J)$  can be determined from either of the following equations:

$$\mathbf{T}_{\mathbf{J}} = (\mathbf{P}_{\mathbf{D}} \times \mathbf{R}_{\theta \mathbf{J} \mathbf{A}}) + \mathbf{T}_{\mathbf{A}}$$

or

$$\begin{split} T_{\rm J} &= (P_{\rm D} \times R_{\rm \theta JC}) + T_{\rm C} \\ \text{where} \quad P_{\rm D} &= I_{\rm O1} (V_{\rm I} - V_{\rm O1}) + I_{\rm O2} (V_{\rm I} - V_{\rm O2}) \text{ and} \\ R_{\rm \theta JC} &= 7^{\circ} \text{C/W}. \end{split}$$




115 Northeast Cutoff, Box 15036 Worcester, Massachusetts 01615-0036






### SI-3003KWF 1 A, Low-Dropout, Dual Output, 1.8 V & 2.5 V Regulator

#### **Dimensions in Millimeters**

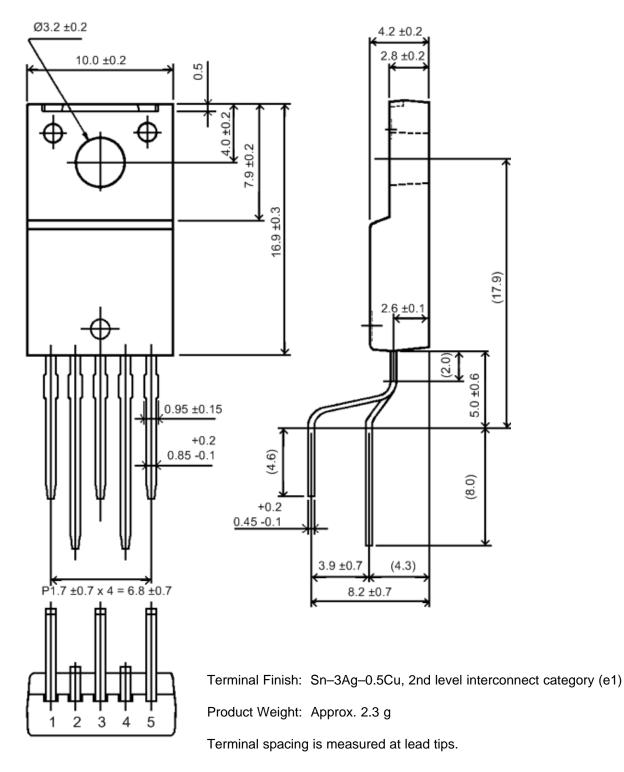



#### **Shipping Container Dimensions in Millimeters**

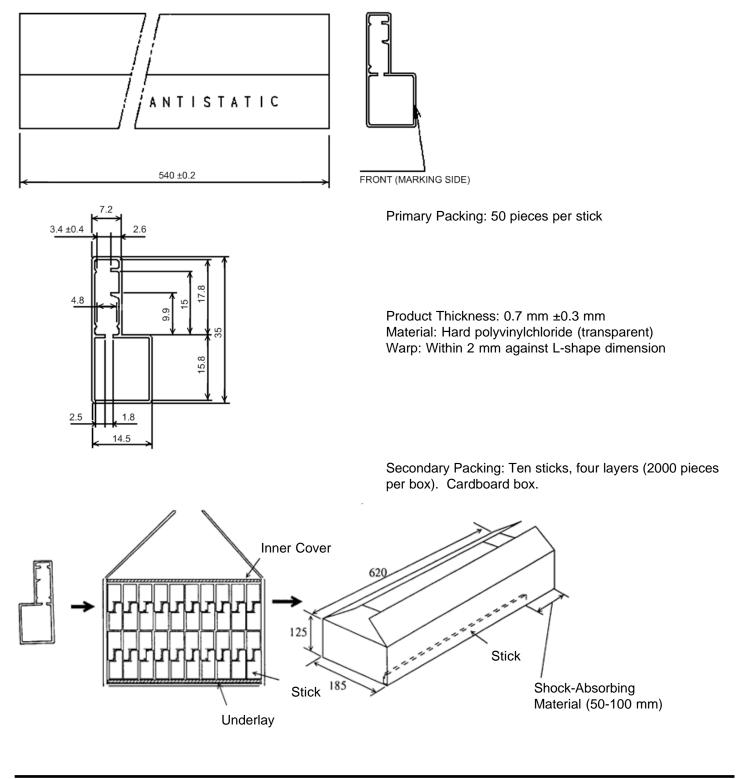



115 Northeast Cutoff, Box 15036 Worcester, Massachusetts 01615-0036





The products described herein are manufactured in Japan by Sanken Electric Co., Ltd. for sale by Allegro MicroSystems, Inc.

Sanken and Allegro reserve the right to make, from time to time, such departures from the detail specifications as may be required to permit improvements in the performance, reliability, or manufacturability of its products. Therefore, the user is cautioned to verify that the information in this publication is current before placing any order.

When using the products described herein, the applicability and suitability of such products for the intended purpose shall be reviewed at the users responsibility.

Although Sanken undertakes to enhance the quality and reliability of its products, the occurrence of failure and defect of semiconductor products at a certain rate is inevitable.

Users of Sanken products are requested to take, at their own risk, preventative measures including safety design of the equipment or systems against any possible injury, death, fires or damages to society due to device failure or malfunction.

Sanken products listed in this publication are designed and intended for use as components in general-purpose electronic equipment or apparatus (home appliances, office equipment, telecommunication equipment, measuring equipment, etc.). Their use in any application requiring radiation hardness assurance (e.g., aerospace equipment) is not supported.

When considering the use of Sanken products in applications where higher reliability is required (transportation equipment and its control systems or equipment, fire- or burglar-alarm systems, various safety devices, etc.), contact a company sales representative to discuss and obtain written confirmation of your specifications.

The use of Sanken products without the written consent of Sanken in applications where extremely high reliability is required (aerospace equipment, nuclear power-control stations, life-support systems, etc.) is strictly prohibited.

The information included herein is believed to be accurate and reliable. Application and operation examples described in this publication are given for reference only and Sanken and Allegro assume no responsibility for any infringement of industrial property rights, intellectual property rights, or any other rights of Sanken or Allegro or any third party that may result from its use.

Linear Regulators