



## Description

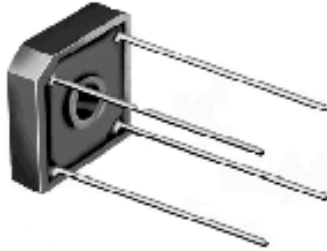

## Mechanical Dimensions

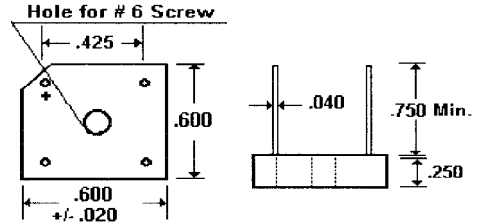

**Mechanical Data:** Weight - 0.3 Ounces. Mounting Torque - 5.1 lbs. Mounting Position - Any.

## Features


- **COMPACT SIZE**
- **LOW LEAKAGE CURRENT**
- **150 AMP SURGE OVERLOAD RATING**
- **MEETS UL SPECIFICATION 94V-0**

Electrical Characteristics @ 25°C.	<i>KBPC600...610 Series</i>								Units	
Maximum Ratings	KBPC600	KBPC601	KBPC602	KBPC604	KBPC606	KBPC608	KBPC610			
Peak Repetitive Reverse Voltage... $V_{RRM}$	50	100	200	400	600	800	1000		Volts	
RMS Reverse Voltage... $V_{R(rms)}$	35	70	140	280	420	560	700		Volts	
DC Blocking Voltage... $V_{DC}$	50	100	200	400	600	800	1000		Volts	
Average Forward Rectified Current... $I_{F(av)}$ $T_C = 50^\circ\text{C}$ , Alum. Heat Sink (5.5" x 6.0" x 0.11" Plate)				6.0						Amps
$T_A = 45^\circ\text{C}$ , PCB Mounting				3.0						Amps
Non-Repetitive Peak Forward Surge Current... $I_{FSM}$ 8.3 mS Single ½ Sine Wave Imposed on Rated Load				175						Amps
Point Rating for Fusing...(T < 8.3 mS)				127						A <sup>2</sup> S
Forward Voltage... $V_F$ Bridge Element @ 3.0 Amps				1.0						Volts
DC Reverse Current... $I_R$ @ Rated DC Blocking Voltage				5.0						μAmps
$T_A = 25^\circ\text{C}$				500						μAmps
$T_A = 125^\circ\text{C}$										
Typical Thermal Resistance... $R_{\theta JC}$ (Alum Heat Sink)				8.0						°C / W / Leg
Typical Junction Capacitance... $C_j$	< .....		186	> < .....		90	>			pF
Operating & Storage Temperature Range... $T_{J'}$ , $T_{STRG}$				-55 to 150						°C


# 6.0 Amp SINGLE PHASE SILICON BRIDGE

**KBPC600 . . . 610 Series**


**Forward Current Derating Curve**

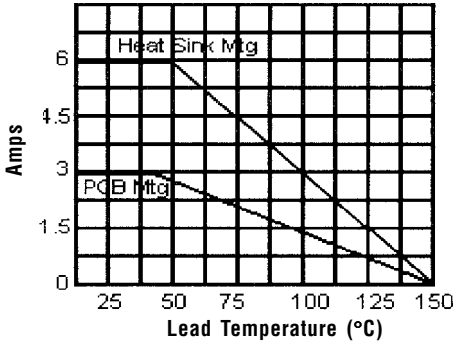


**Non-Repetitive Peak Forward Surge Current**

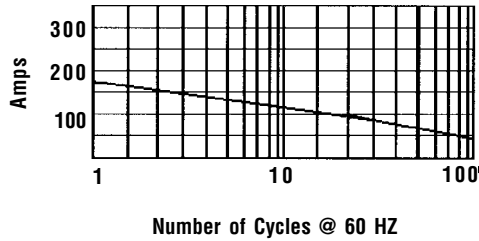


**Typical Instantaneous Forward Characteristics**

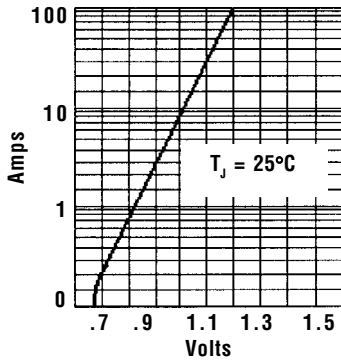


**Typical Reverse Characteristics**

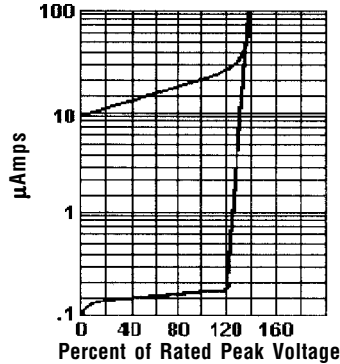

**Typical Junction Capacitance**

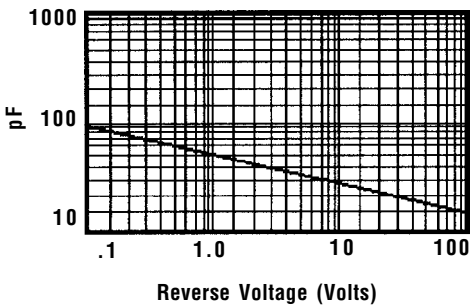

**Electrical Description**

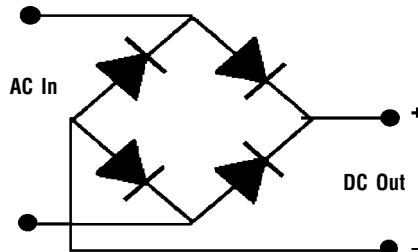

Ratings at 25 Deg. C ambient temperature unless otherwise specified.

Single Phase Half Wave, 60 HZ Resistive or Inductive Load.

For Capacitive Load, Derate Current by 20%.