


MSFC30-183-022K0

AMPS-IF

■Features

- IF filter for AMPS.
- Because it is leadless type, automatic mounting is possible.
- Excellent group delay distortion characteristics.

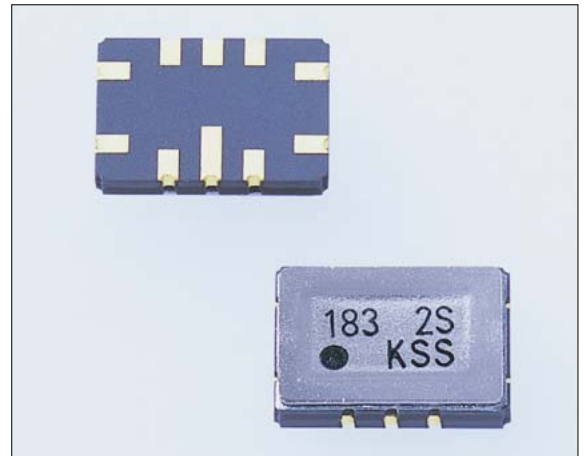


Original Size

■Specifications

| Item | Unit | Conditions | Specifications | |
|-----------------------------|------|--------------|----------------|----------|
| Nominal Frequency | MHz | ————— | 183.6 | |
| Operating Temperature Range | °C | -25~+75 | ————— | |
| Storage Temperature Range | °C | -35~+85 | ————— | |
| Pass Bandwidth | kHz | -3dB | ±11 MIN. | |
| Ripple | dB | Fo±11kHz | 0* | 1.5 MAX. |
| Insertion Loss | dB | Minimum loss | 4.5* | 5.5 MAX. |
| Guaranteed Attenuation | dB | Fo±60kHz | -27/+21* | 11 MIN. |
| | | Fo±120kHz | -51/+49* | 40 MIN. |
| Group Delay Deviation | μs | Fo±11kHz | 1.2* | 15 MAX. |

※ : Typ.

■Outline

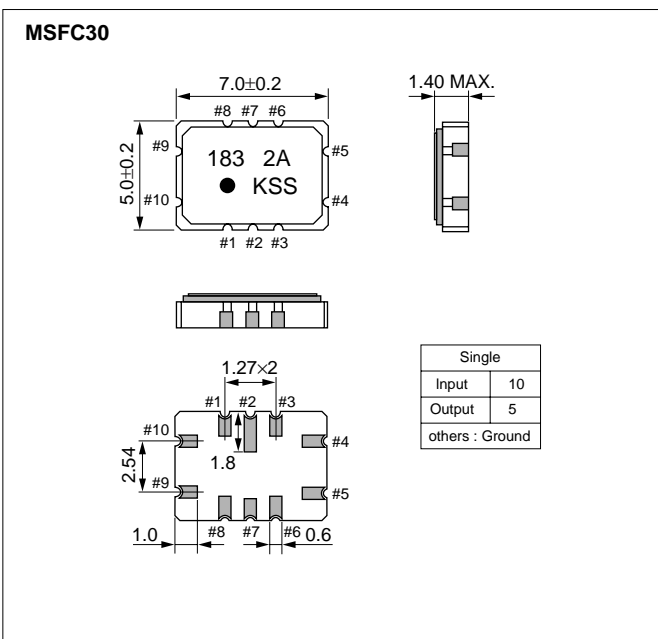

Dimensions(mm)

■Measurement Circuit

