

# Surface Mount Directional Coupler

75Ω 5 to 1000 MHz

## ADC-10-4-75+ ADC-10-4-75



CASE STYLE: CD542  
PRICE:\$6.95 ea. QTY (10-49)

+ RoHS compliant in accordance  
with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site  
for RoHS Compliance methodologies and qualifications.


### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C


### Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2
75Ω TERM EXTERNAL	4
ISOLATE (DO NOT USE)	5

### Outline Drawing

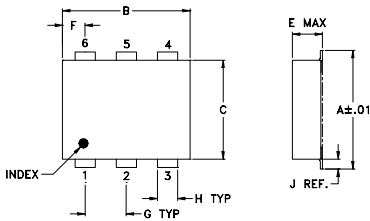

### PCB Land Pattern




### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.272	.310	.220	.100	.112	.055	.100
6.91	7.87	5.59	2.54	2.84	1.40	2.54

H	J	K	L	wt
.030	.026	.065	.300	grams
0.76	0.66	1.65	7.62	0.20

### Demo Board MCL P/N: TB-08 Suggested PCB Layout (PL-042)

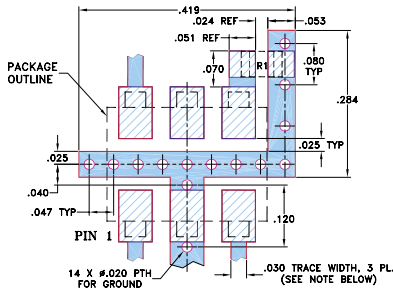

- NOTES:
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
  - DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- wideband, 5-1000 MHz
- low insertion loss, 0.9 db typ.
- excellent coupling flatness, ±0.2 typ.
- aqueous washable
- protected by U.S Patents 6,133,525 & 6,140,887

### Applications

- cable tv
- communications




### Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS <sup>1</sup> (dB)						DIRECTIVITY (dB)			VSWR (:1)	POWER INPUT, W				
	Nom.	Flatness	L		M		U		L		M		U	Typ.	L	MU	
f <sub>L</sub> -f <sub>U</sub>			Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Max.		
5-1000	10.5±0.5	±0.5	0.85	1.4	0.9	1.4	1.0	1.4	40	20	18	12	12	8	1.2	1.0	1.0

L= 5-50 MHz M= 50-500 MHz U= 500-1000 MHz  
1. Mainline loss includes theoretical power loss at coupled port.

### Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
5.00	0.86	10.49	39.77	21.07	35.08	19.58
20.00	0.85	10.47	44.02	21.45	54.46	20.21
30.00	0.87	10.47	42.61	21.33	45.16	20.18
50.00	0.88	10.54	37.53	21.23	39.56	20.11
200.00	0.94	10.44	24.51	21.30	19.31	20.41
300.00	0.95	10.45	20.79	20.99	25.49	20.87
500.00	0.96	10.68	15.89	19.89	21.12	22.93
700.00	0.97	10.87	13.00	17.97	18.87	25.71
800.00	1.00	10.91	12.16	17.94	19.06	27.11
1000.00	1.02	10.93	11.40	17.55	20.58	24.44

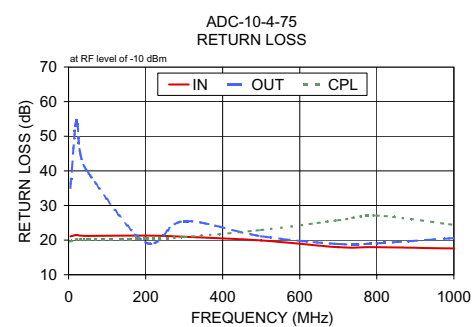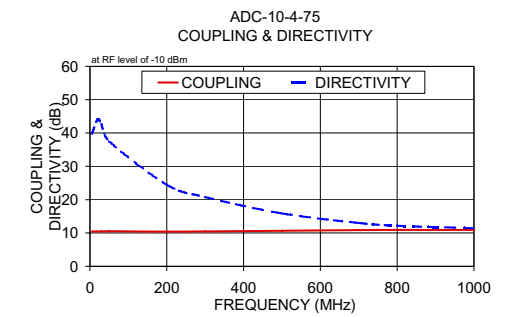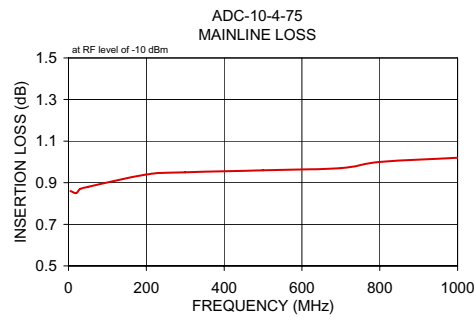

### electrical schematic

