

Surface Mount Power Splitter/Combiner

JPS-3-1+ JPS-3-1

3 Way-0° 50Ω 5 to 300 MHz




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.375W max.

Pin Connections

SUPPORT	1
PORT 1	6
PORT 2	4
PORT 3	3
GROUND	2,5


Outline Drawing

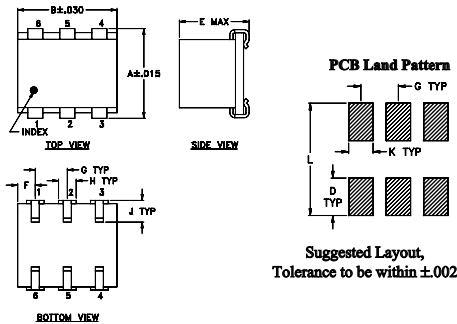

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54
H	J	K	L		wt	
.047	.065	.065	.300		grams	
1.19	1.65	1.65	7.62		0.45	

Demo Board MCL P/N: TB-211 Suggested PCB Layout (PL-097)



- NOTES: 1. TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
■ DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
□ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Features

- wideband, 5 to 300 MHz
- high isolation, 33 dB typ.
- low insertion loss, 0.3 dB typ.

Applications

- VHF
- defense & federal communications
- amateur & FM radio

CASE STYLE: BH292
PRICE: \$13.95 ea. QTY. (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 4.8 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f _L -f _U																		
5-300	34	25	33	23	32	20	0.3	0.6	0.3	0.7	0.5	1.4	2.0	4.0	6.0	0.4	0.4	0.6

L = low range [f_L to 10 f_L] M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)			Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3
	S-1	S-2	S-3		1-2	1-3	2-3					
	5.00	4.96	5.08		5.03	0.12	36.91					
8.00	4.93	5.07	5.00	0.14	37.89	34.24	35.50	0.52	1.07	1.08	1.10	1.14
10.00	4.94	5.04	5.00	0.11	38.11	34.35	35.29	0.36	1.06	1.07	1.10	1.13
20.00	4.95	5.04	4.99	0.09	37.92	34.31	34.69	0.22	1.04	1.06	1.08	1.12
35.00	4.98	5.06	5.02	0.08	37.22	33.58	33.72	0.13	1.04	1.05	1.07	1.11
50.00	4.99	5.08	5.05	0.09	36.36	33.15	32.78	0.13	1.03	1.04	1.06	1.11
65.00	5.01	5.10	5.04	0.08	35.45	32.52	31.94	0.25	1.03	1.04	1.05	1.11
80.00	5.03	5.11	5.06	0.08	34.62	31.74	31.15	0.26	1.04	1.04	1.05	1.10
95.00	5.05	5.13	5.08	0.08	34.24	31.40	30.56	0.14	1.04	1.04	1.05	1.09
110.00	5.08	5.15	5.10	0.07	34.06	31.26	30.29	0.23	1.04	1.04	1.05	1.09
130.00	5.11	5.17	5.12	0.06	34.13	31.25	29.99	0.37	1.05	1.04	1.05	1.08
170.00	5.18	5.22	5.16	0.05	33.68	30.69	28.91	0.41	1.03	1.03	1.07	1.07
210.00	5.24	5.27	5.22	0.05	35.00	30.99	28.88	0.54	1.07	1.01	1.07	1.07
250.00	5.34	5.32	5.27	0.07	40.60	33.64	29.78	0.57	1.12	1.02	1.08	1.08
300.00	5.50	5.45	5.37	0.12	41.62	40.75	30.25	0.91	1.11	1.02	1.12	1.11

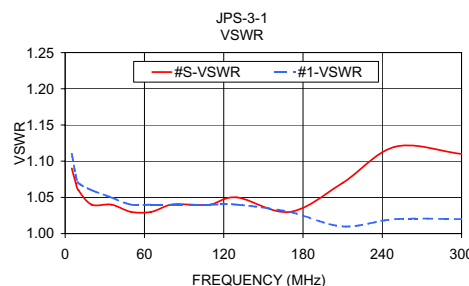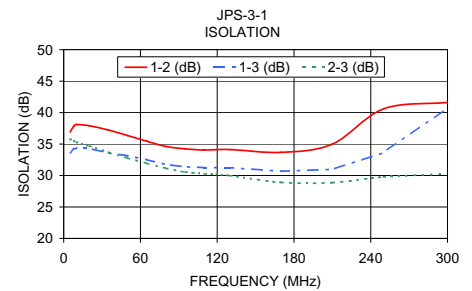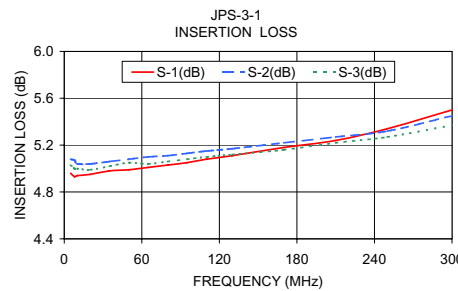

electrical schematic

