

Surface Mount RF Transformer

50Ω 0.07 to 200 MHz

T2-613-1-KK81+ T2-613-1-KK81



Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	55°C to 100°C
RF Power	0.25W
DC Current	30mA

Pin Connections

PRIMARY DOT	X1, Y5, Z3
PRIMARY	X2, Y6, Z4

Features

- wideband, 0.07 to 200 MHz
- single ended to balanced with impedance ratio selection
- also available with plug-in (X65) & flat pack (W38) leads

Applications

- HF/VHF
- test equipment

CASE STYLE: KK81
PRICE: \$1.95 ea. QTY (1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Transformer Electrical Specifications

Ω RATIO	FREQUENCY (MHz)	INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz
1:1:2	0.07-200	0.07-200	0.1-100	0.5-50

* Insertion Loss is referenced to mid-band loss, 0.4 dB typ.

Outline Drawing

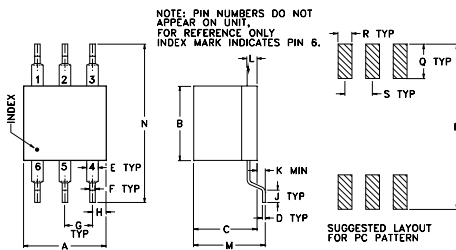



Outline Dimensions (inch)

A	B	C	D	E	F	G	H	J
.30	.27	.23	.010	.042	.020	.100	.05	.05
7.62	6.86	5.84	0.25	1.07	0.51	2.54	1.27	1.27
K	L	M	N	P	Q	R	S	wt
.020	.036	.26	.575	.600	.125	.050	.100	grams
0.51	0.91	6.60	14.61	15.24	3.18	1.27	2.54	0.50

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
0.07	1.48	8.88
0.20	1.34	15.76
0.63	0.68	20.56
2.00	0.47	25.22
9.20	0.42	27.19
29.09	0.49	23.67
63.25	0.58	18.52
100.24	0.77	15.39
149.06	1.06	13.44
200.00	1.45	13.77

Config. F

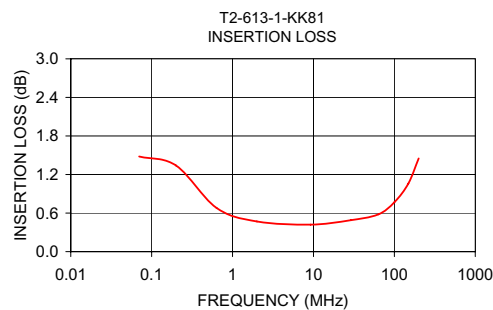

Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

INTERNET <http://www.minicircuits.com>



REV. A
M98898
T2-613-1-KK81
IG/TD/CP
060807

Mini-Circuits ISO 9001 & ISO 14001 Certified