

### Features

- industry standard through-hole footprint
- controlled parameters ensure full compliance with ITU.T.G.703 when matched with recommended IC
- ideal for all 1.544 and 2.048 Mbs interface applications
- manufactured in ISO-9001 approved Talema facility
- 1500Vrms minimum isolation voltage
- operating temperature 0° to 70°






### Electrical Specifications @25°C

S <sub>2M</sub> Interface Transformers							
Part Number	Turns Ratio ±2%	OCL (mH Min.) W1+W2+W3 in Series	L <sub>L</sub> (μH Max.)	DCR (mOhms Max.) W1=W2=W4=W5	DCR (mOhms Max.) W3	V <sub>P</sub> (Vrms)	Schematic
19649	1 : 1 : 0.666 : 1 : 1	5,0	1,0	165	120	1500	A

### Test Conditions:

Inductance: Windings 1 + 2 + 3 in series - measurement at 10kHz, 100mV  
 Leakage Inductance: Windings 1 + 3 + 5 in series, windings 2 + 4 short circuited - measurement at 100kHz, 100mV  
 Turns Ratio: 10kHz, 100mV  
 High Voltage: 2.0kV for 2 seconds, winding to winding

### Dimensions & Schematics

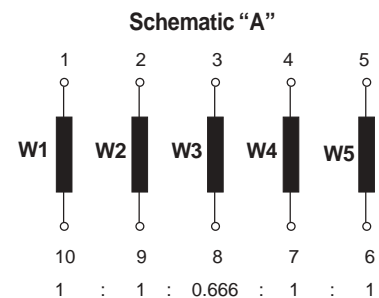

Dimensions: Inches (Millimeters)  
 Tolerance: ±0.010 (0.25) unless specified otherwise

Units will be supplied in tubes  
 Weight: 3.7grams

## Sales & Marketing, Design and Manufacturing Facilities

<http://www.talema-nuvotem.com>

### Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.  
 Jablonského 7  
 326 00 Plzeň  
 Tel: Int. + 420 37 - 744 9303  
 Fax: Int. + 420 37 - 744 3697  
 Email: talema@talema.cz

### Germany

TALEMA ELEKTRONIK GMBH  
 Riesstr. 8, Postfach 2523  
 82110 Germering  
 Tel: Int. + 49 89 - 841 00 - 0  
 Fax: Int. + 49 89 - 841 00 25  
 Email: info@talema.isar.de

### Ireland

NUVOTEM TEO.  
 Crollý  
 Co. Donegal  
 Tel: Int. + 353 74 - 954 8666  
 Fax: Int. + 353 74 - 954 8139  
 Email: info@nuvotem.com

### India

TALEMA ELECTRONIC PVT. LTD.  
 Opposite the SIDCO Industrial Estate  
 Gins Towers  
 4/5S.H/1, Omalur Main Road  
 Salem - 636 004, Tamil Nadu  
 Tel: Int. + 91 427 - 244 1325  
 Fax: Int. + 91 427 - 243 0034  
 E-mail: talema@talemaindia.com