

Features

- Meets requirements of ANSI X3T9.5, FC-PH3 Fibre Channel Physical Layer Specification and IEEE 802.3z PMD
- Fast rise time
- Low profile, light weight SMD packages for pick and place compatibility while providing consistent and reliable coplanarity
- Excellent quality at extremely competitive price due to high volume production
- Manufactured in ISO-9001 approved TALEMA facility



Electrical Specifications

Ratings @ 25°C ambient

Minimum Isolation Voltage: 1500Vrms

Operating Temperature Range: 0 to +85°C

Storage Temperature: -25°C to +125°C

Inductance measured at 100kHz, 20mVrms


Standard Packaging: Tape & Reel

Dual Gigabit Isolation Transformers for 150 Ohm Twinax Cable


Part Number	OCL (μH Min.)	Turns ratio $\pm 5\%$	R_{CUP} (mOhms)	Rise Time (ps Max) 20-80%	Low Frequency Cutoff (-3dB)	V_{P} (Vrms)	Schematic
TCJ-5.5-A	5.50	1ct : 1ct	210	350	<2.5MHz	1500	A
TCJ-5.5-B	5.50	1 : 1	210	280	<2.5MHz	1500	B

Dimensions & Schematics


Package

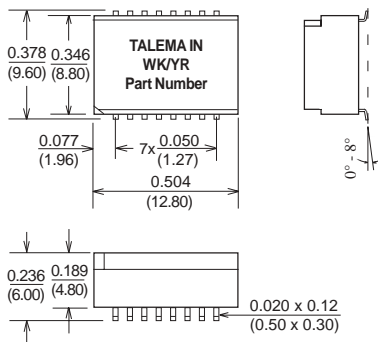


Suggested Pad Layout



A



B



Sales & Marketing, Design and Manufacturing Facilities

Europe - <http://www.talema-nuvotem.com>

Eastern Europe & Czech Republic

NT MAGNETICS s.r.o.
Chebská 27
322 00 Plzeň
Tel: Int. + 420 37 - 744 9303
Fax: Int. + 420 37 - 744 3697
Email: talema@talema.cz

Germany

TALEMA ELEKTRONIK GMBH
Riesstr. 8, Postfach 2523
82110 Germering
Tel: Int. + 49 89 - 841 00 - 0
Fax: Int. + 49 89 - 841 00 25
Email: info@talema.isar.de

Ireland

NUVOTEM TEO.
Croly
Co. Donegal
Tel: Int. + 353 74 - 954 8666
Fax: Int. + 353 74 - 954 8139
Email: info@nuvotem.com

India

TALEMA ELECTRONIC PVT. LTD.
Opposite the SIDCO Industrial Estate
Gins Towers
4/5S.H/1, Omalur Main Road
Salem - 636 004, Tamil Nadu
Tel: Int. + 91 427 - 244 1325
Fax: Int. + 91 427 - 243 0034
E-mail: talema@talemaindia.com