

Features

- RoHS compliant*
- 18 RC terminators tied to a common node
- Stable thin-film-on-silicon technology
- Ultra-miniature packages to JEDEC standards

Applications


- High-speed bus termination
- Low power consumption
- Ideal for space-constrained applications

Thin Film on Silicon 2CTA AC Terminator x 18

General Information

The AC Terminator is used to provide termination for clock and data lines where transmission line effects would otherwise cause wave reflections or signal ringing. These Silicon-based, Tantalum-Nitride resistors and capacitors feature excellent stability, temperature coefficients and tracking performance. This product series conforms to JEDEC standards.

Package Schematic



Electrical & Environmental Characteristics

Electrical Characteristics	Symbol	Minimum	Nominal	Maximum	Unit
Resistance Range	R	33		100	Ω
Resistor Tolerance			±10 %		Ω
Power Rating per Resistor @ 70 °C				0.1	Watt
Capacitor Range	С	33		180	pF
Capacitor Tolerance			±20 %		pF
Capacitor Breakdown Voltage		25	35		V
Operating Voltage				50	V
Environmental Characteristics ESD		2 K			V
Operating Temperature	Тј	-55		+125	°C
Storage Temperature	T _{stg}	-65		+150	°C
Power Rating per Package @ 70 °C	ŭ			1.0	Watt


Specifications are subject to change without notice. Customers should verify actual device performance in their specific applications.


Thin Film on Silicon 2CTA AC Terminator x 18

BOURNS®

Mechanical Characteristics

QSOP Package Dimensions






Model	Α					
2QSP20	8.56 - 8.74 (.337344)					

Governing dimensions are in mm. Dimensions in parentheses are in inches and are approximate.


JEDEC Reference Number MO-137.

QSOP Package Power Temperature Derating Curve



Typical Part Marking

Represents total content. Layout may vary.



 $\overbrace{}^{0-8}^{\circ} \overbrace{(.007 - .010)}^{\bullet}$

Standard RC Values


R1 Value (ohms)	C1 Value (pF)	Cap. BV (typ.)	Part Number (Tape & Reel)	Part Number (Tubes)
100	100	25	2CTA101101MQ20R	2CTA101101MQ20T
33	47	50	2CTA330470MQ20R	2CTA330470MQ20T
47	47	50	2CTA470470MQ20R	2CTA470470MQ20T

Thin Film on Silicon 2CTA AC Terminator x 18

BOURNS®

Dispensing

For large quantities, the product will be dispensed in Tape and Reel (see diagram below).

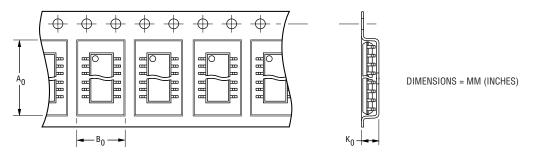

Package	A ₀	B ₀	K ₀	Width	Pitch	No. of Pieces per 13 reel	No. of Pieces per tube	
QSOP								
20 Pin	6.5 (0.256)	9.0 (0.354)	2.1 (0.083)	16 (0.630)	8 (0.315)	3,500	56	

How To Order

	2 CT	A101	101	MQ	20	RLF
Product Class — Thin-Film-on-Silicon						
Product Function CTA = AC Terminator x 18						
Resistance Value Code 1st two digits are significant, 3rd digit = number of zeros to follow to give resistance value in ohms.]				
Capacitance Code 1st two digits are significant, 3rd digit = number of zeros to follow to give capacitor value in pF.						
Standard Grade $\frac{R \text{ Tol.}}{M = \pm 10 \%} \frac{C \text{ Tol.}}{\pm 20 \%}$						
Standard Package Style Q = QSOP						
Pin Count Q = 20						
Dispensing R = Reel T = Tube						
Terminations						

LF = 100 % Sn (RoHS Compliant)



Reliable Electronic Solutions

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116 Europe: Tel: +41-41 768 5555 • Fax: +41-41 768 5510 The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700 www.bourns.com