



Specifications

| | | |
|---|--|------------------------------|
| Output voltage | 6 V ac at 1000 mA | |
| Rated input voltage | 120 V ac | |
| Primary rated voltage | 120 V ac 60 Hz 9 W | |
| Primary exciting current | 30 mA rms max. | |
| Secondary rated voltage & current | no load voltage (max.) | 7.6 V ref |
| | full load voltage (1000 mA) | 6 V \pm 5% |
| Temperature rise of primary winding (full load) | 70°C max. using resistance method | |
| Insulation resistance | \geq 100 M Ohm at 500 V dc | |
| HI-POT test | from input to output for 1 min. | 1240 V ac at 2 mA |
| | from input to output for 1 sec. | 1600 V ac at 2 mA |
| | from primary to secondary winding for 1 sec. | 1600 V ac at 2 mA |
| | from primary winding to core for 1 sec. | 1600 V ac at 2 mA |
| | from secondary winding to core for 1 sec. | 750 V ac at 2 mA |
| Safety standards | UL/cUL | |
| RoHS compliant | yes | |
| No load power consumption | 0.5 W max. | |
| Efficiency | Energy Star Compliant - Efficiency Level IV | |
| Test conditions | Ambient temp | 40°C \pm 2°C |
| | Humidity | 90-95% 96 hours at Full Load |
| | Rated voltage | 8 hours at full load |
| Adapter color | Case | black |
| | Cord | black |



Label




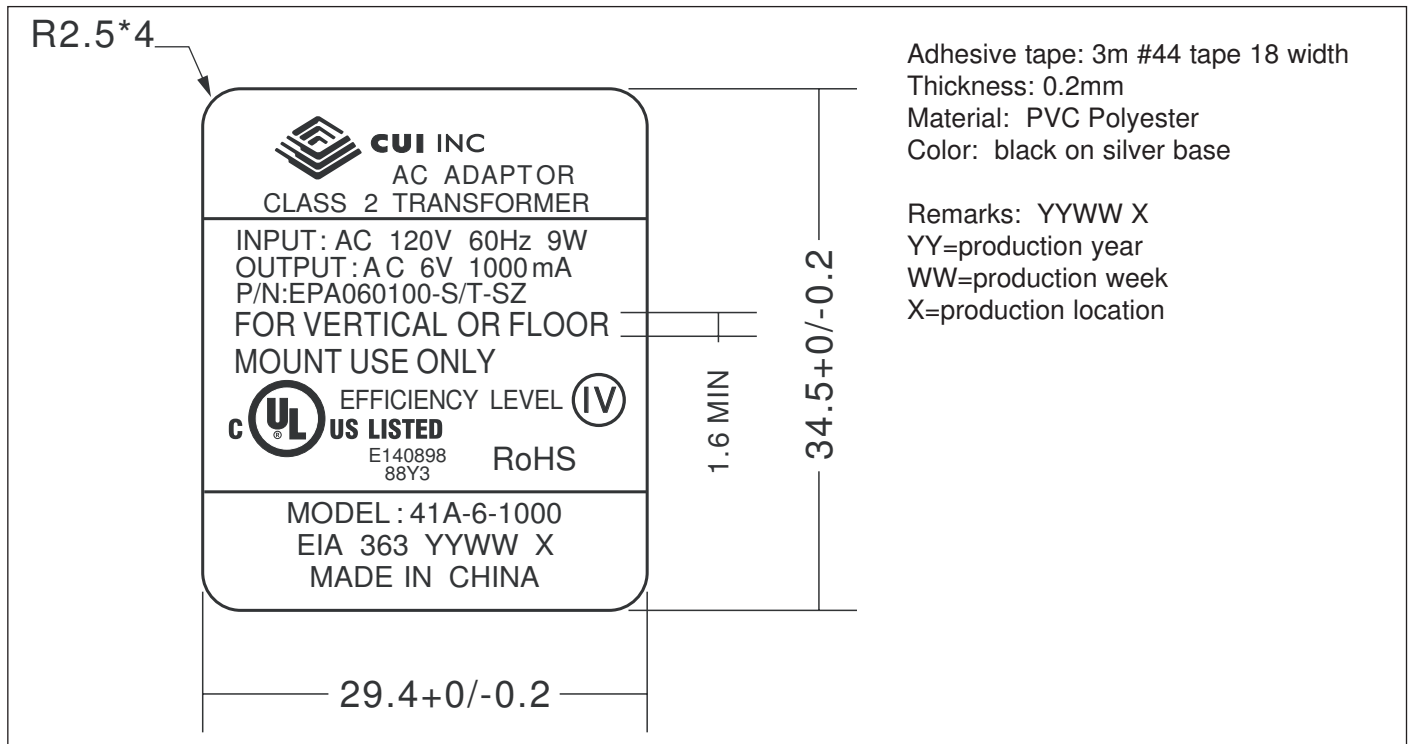




Mechanical Drawing


Tolerance: ± 1

Weight 280 g

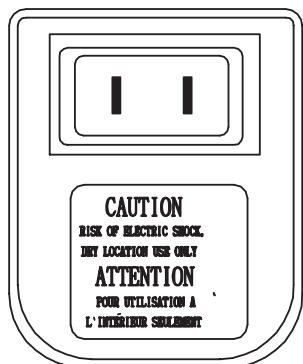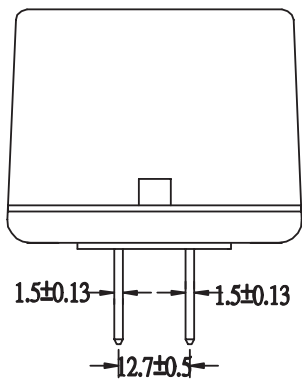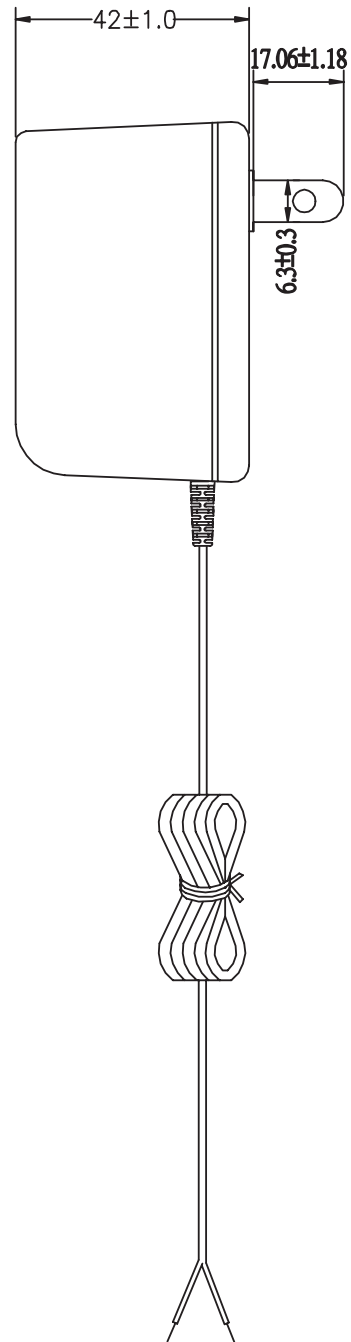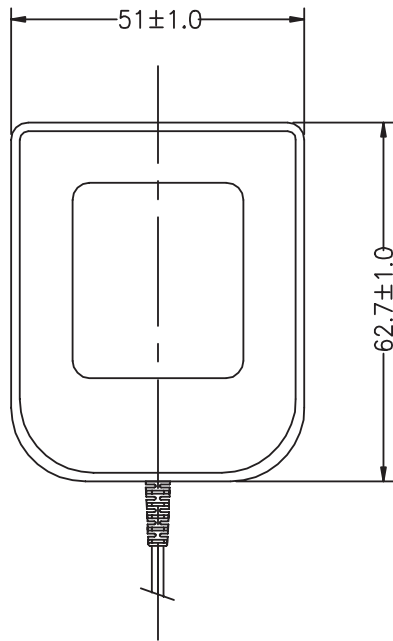





DC Cord

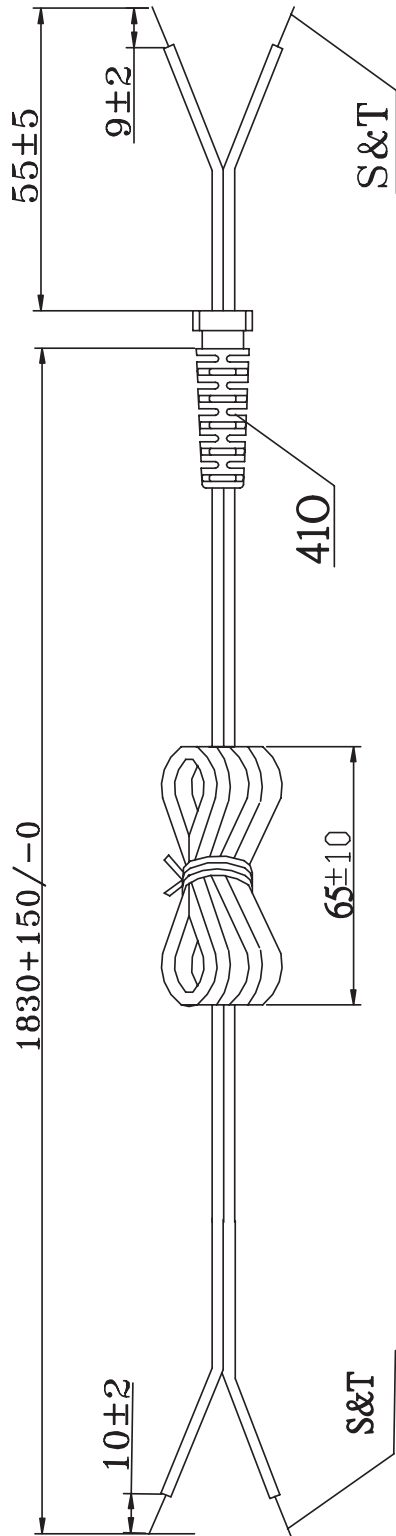

#22AWG X2C BLACK/WHITE WIRE BLACK WIRE IN NEGATIVE, BLACK/WHITE WIRE IN POSITIVE

WIRE OD: Ø1.8X3.6



| | |
|----------------|--|
| VIBRATION TEST | Parameter request |
| | <ul style="list-style-type: none"> a. $\pm 60^\circ$ b. WEIGHT 200g c. 40 ROUND/MINUTE d. OVER 1000 COUNT MIN |

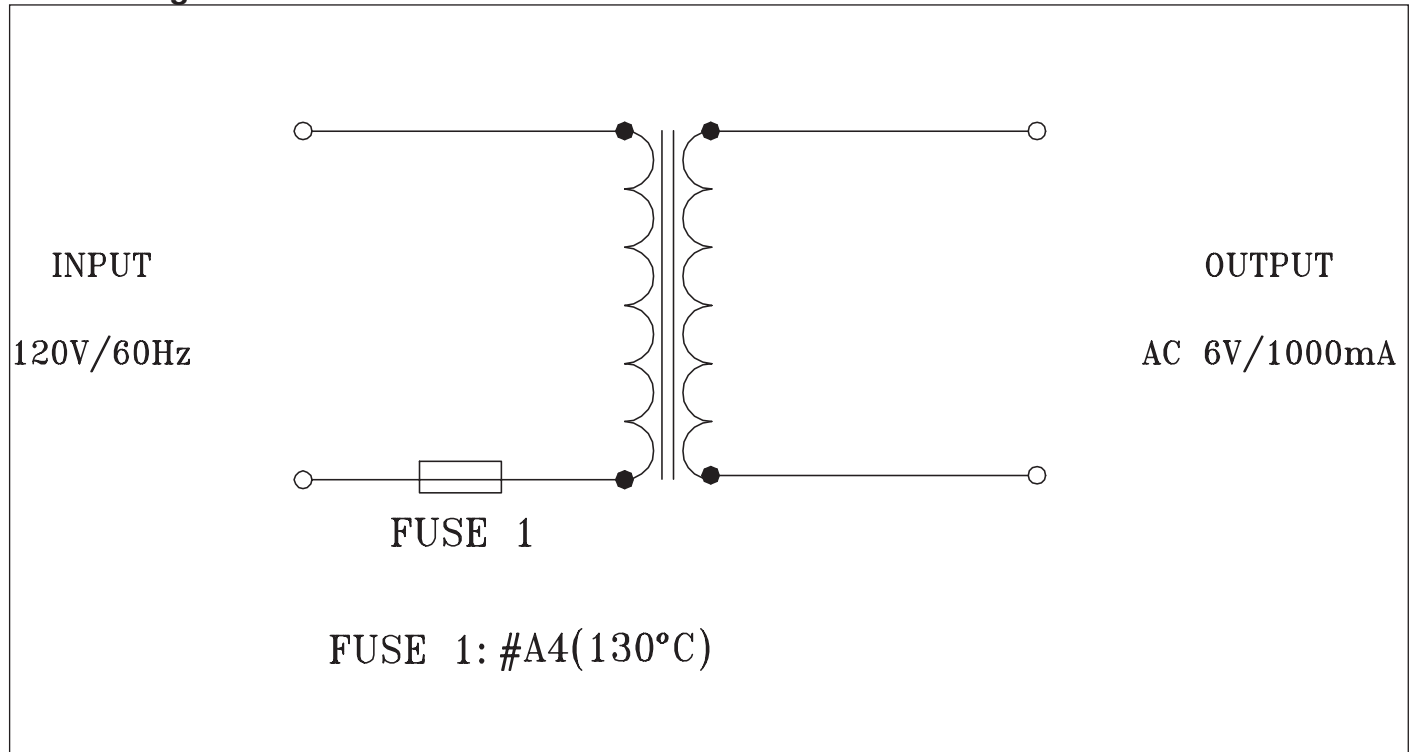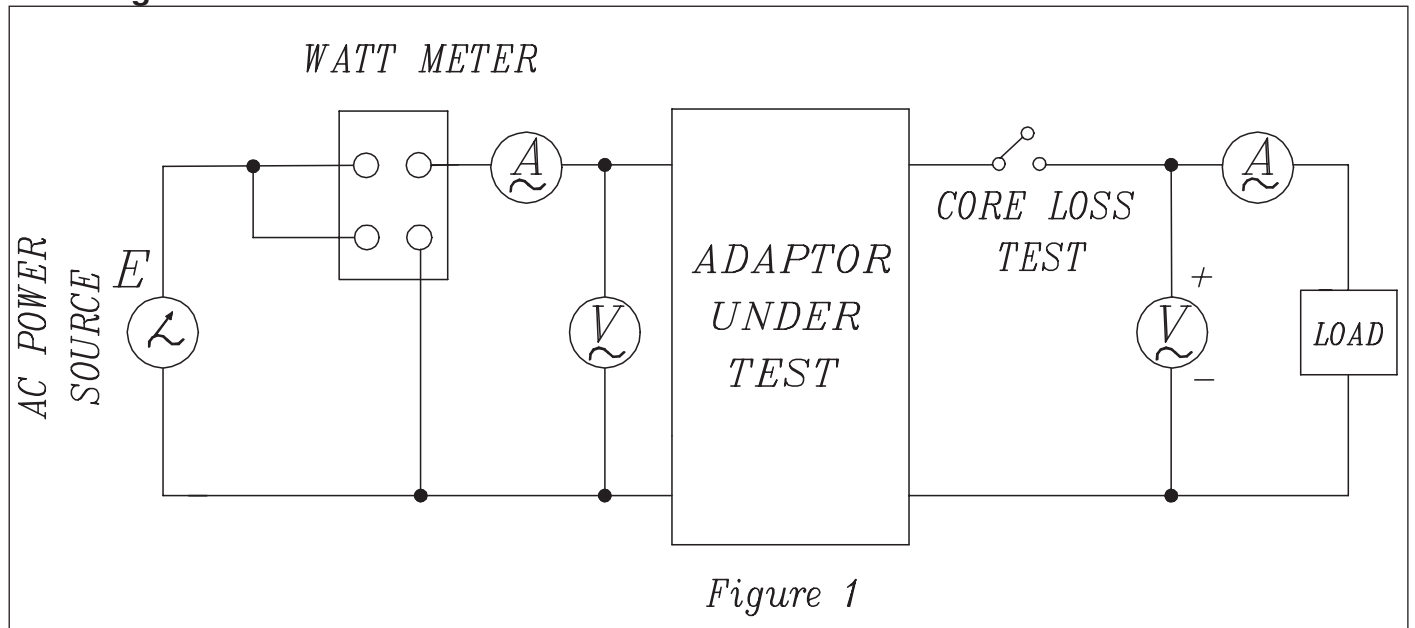Circuit Diagrams

Test Diagram




Individual Packaging

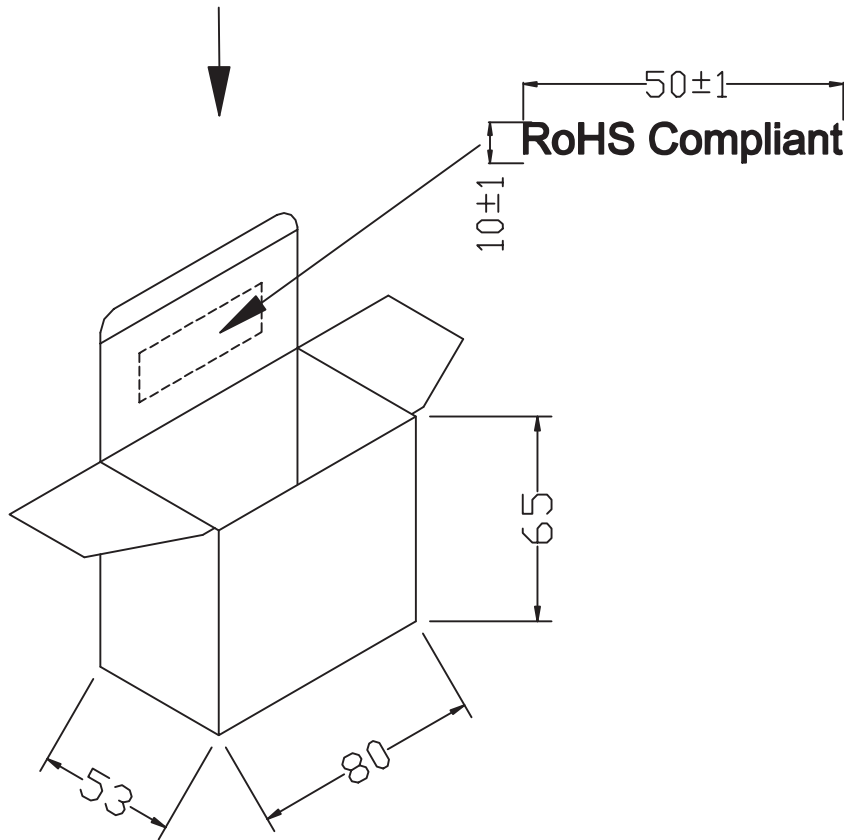Tolerance: ± 1





Packaging

Tolerance: +7/-0

OUTSIDE CARTON:A=B(6mm)

INSIDE CARTON:A-B(3mm)

CARTON SIZE: 350X345X190mm

Q'TY: 60pcs(20x3x1)

N.W:16.8KGS

G.W:17.8KGS

G.W:18.8KGS

