


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

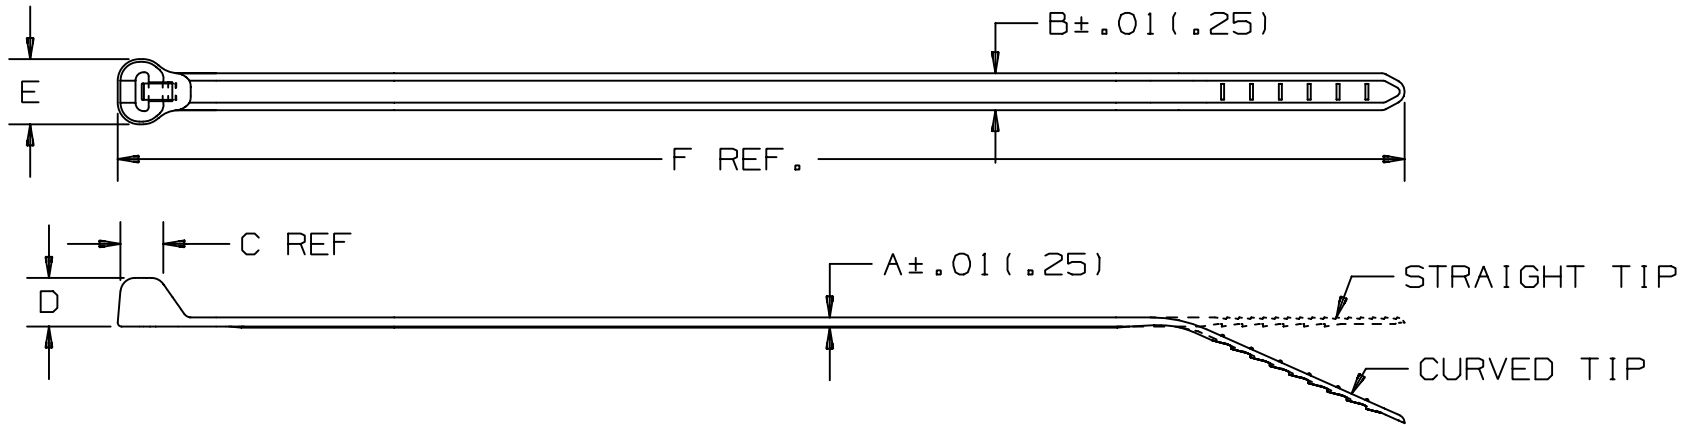

PANDUIT PART NO.	BUNDLE DIA.		A	B	C	D	E	F	MIN. LOOP TENSILE lbs. (N)	CROSS SECTION	TIP STYLE	WEIGHT lbs./100 pcs. (g)
	MIN. in (mm)	MAX. in (mm)										
BT1M	.06 (1.5)	0.90 (23)	.036 (0.9)	.095 (2.4)	.110 (2.8)	.156 (4.0)	.172 (4.4)	4.0 (102)	18 (80)	MINIATURE	CURVED	.05 (22)
BT1.5M	.06 (1.5)	1.5 (38)	.046 (1.2)	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182 (4.6)	6.3 (160)	18 (80)	MINIATURE	CURVED	.09 (43)
BT2M	.06 (1.5)	2.0 (51)	.046 (1.2)	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182 (4.6)	7.9 (201)	18 (80)	MINIATURE	CURVED	.12 (53)
BT4M	.06 (1.5)	4.00 (102)	.046 (1.2)	.095 (2.4)	.125 (3.2)	.156 (4.0)	.182 (4.6)	14.2 (361)	18 (80)	MINIATURE	CURVED	.21 (93)

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

PANDUIT CORP. TINLEY PARK, ILLINOIS

BARB-TY CABLE TIES  
BT SERIES

UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE:  
(.X) ± .10 (2.5) (.XXX) ± .020 (.51)  
(.XX) ± .02 (.5) ANGLES ±

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE GIVEN IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY  
PMH

MAT'L:

SCALE  
NONE

7 2-12-03 JABO CORRECTED BT2M 2.00 DIA mm TO (51)

0037 7

DATE  
6-24-93

NYLON 6/6

DRAWING NO.  
BT-0037  
SHEET 1 OF 3

DWG  
A  
SIZE

REV DATE BY CHK DESCRIPTION ECN - R CUST SUP