

MINI-PS-100-240AC/24DC/1.3

Order No.: 2866446

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2866446>

DIN rail power supply unit 24 V DC/1.3 A, primary switched-mode

Commercial data

EAN	4046356073905
Pack	1 Pcs.
Customs tariff	85044081
Weight/Piece	0.2504 KG
Catalog page information	Page 502 (IF-2007)

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Product description

MINI POWER is the extremely slim power supply unit with constructional widths of 22.5 mm, 45 mm and 67.5 mm.

In addition to a 24 V version with output currents of 1.3 A, 2 A and 4 A, special voltages with 5 V/3 A and ± 15 V/1 A and 10 V...15 V/2 A and 8 A are also available.

A reliable starting of complex loads is ensured by a power reserve of up to 100% – the POWER BOOST.

The high operational reliability is thus dependably guaranteed in complex global networks as well. MINI POWER also functions in applications where static voltage dips, transient failures of the supply voltage or phase failure are to be expected.

Generously dimensioned capacitors guarantee a mains buffering of more than 20 ms under full load.

Worldwide use is realized by the consistent implementation of a wide-range input.

In this way, your whole system can be tested at any manufacturing location in the world and be delivered to global destinations without switching over the input voltage, often a source of faults. This saves storage costs and reduces the logistical work.

An international approval package including UL 60950 for information technology equipment and UL 508 for industrial regulating devices pave the way for worldwide applications.

Technical data

Input data

Nominal input voltage	100 V AC ... 240 V AC
AC input voltage range	85 V AC ... 264 V AC
DC input voltage range	90 V DC ... 350 V DC
AC frequency range	45 Hz ... 65 Hz
DC frequency range	0 Hz
Current consumption	Approx. 0.6 A (120 V AC)
	0.4 A (230 V AC)
Inrush surge current	< 15 A (< 0.6 A2s)
Power failure bypass	> 40 ms (120 V AC)
	> 100 ms (230 V AC)
Input fuse	1.25 A (slow-blow, internal)
Recommended backup fuse	6 A
	10 A
	16 A (characteristic B)
Name of protection	Transient surge protection
Protective circuit/component	Varistor

Output data

Nominal output voltage	24 V DC \pm 1%
Setting range of the output voltage	22.5 V DC ... 28.5 V DC
Output current	1.3 A (-25 °C ... 60 °C)
	1.6 A (with POWER BOOST, -25 °C ... 40 °C)
	1.6 A (-25°C ... 40°C)
Connection in parallel	Yes, for redundancy and increased capacity
Connection in series	No
Starting delay with capacitive load	(Unrestricted)
Max. capacitive load	Unlimited
Current limitation	Approx. 5 A (for short circuit)
Control deviation	< 1 % (change in load, static 10% ... 90%)
	< 3 % (change in load, dynamic 10% ... 90%)
	< 0.1 % (change in input voltage \pm 10%)
Residual ripple	< 20 mVPP
Peak switching voltages nominal load	< 50 mVPP

Maximum power dissipation idling	0.9 W
Power loss nominal load max.	4.5 W
General data	
Width	22.5 mm
Height	99 mm
Depth	107 mm
Weight	0.21 kg
Operating voltage display	LED green
Efficiency	> 85 %
Insulation voltage input/output	3 kV (routine test)
	4 kV (type test)
Degree of protection	IP20
Class of protection	II (in an enclosed control cabinet)
MTBF	> 500 000 h in acc. with IEC 61709 (SN 29500)
Ambient temperature (operation)	-25 °C ... 70 °C (> 60°C derating)
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Max. permissible relative humidity (operation)	95 % (at 25°C, no condensation)
Mounting position	Horizontal DIN rail NS 35, EN 60715
Assembly instructions	Can be aligned: Horizontal 0 cm, vertical 5 cm
Electromagnetic compatibility	Conformance with EMC directive 89/336/EEC
Immunity to interference	EN 61000-6-2
Standard – Electrical equipment of machines	EN 60204
Standard – Safety transformers for switched-mode power supply units	EN 61558-2-17
Standard - Electrical safety	EN 60950/VDE 0805 (SELV)
Standard – Electronic equipment for use in electrical power installations and their assembly into electrical power installations	EN 50178/VDE 0160 (PELV)
Standard – Safety extra-low voltage	EN 60950 (SELV)
	EN 60204 (PELV)
Standard - Safe isolation	DIN VDE 0100-410
	DIN VDE 0106-1010
Standard – Protection against shock currents, basic requirements for protective separation in electrical equipment	DIN VDE 0106-101
Standard – Limitation of mains harmonic currents	EN 61000-3-2

UL approvals	UL/C-UL listed UL 508
	UL/C-UL Recognized UL 60950
	UL/C-UL Listed UL 1604 Class I, Division 2, Groups A, B, C, D
Surge voltage category	III

Connection data, input

Type of connection	COMBICON screw/plug connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm
Screw thread	M 3

Connection data, output

Type of connection	COMBICON screw/plug connection
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²
Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Stripping length	7 mm

Signaling

Output name	DC OK active
Output description	U _{OUT} > 21.5 V: High signal
Maximum switching voltage	≤ 24 V
Output voltage	+ 24 V DC
Continuous load current	≤ 20 mA
Status display	"DC OK" LED green
Note on status display	U _{OUT} > 21.5 V: LED lights up
Conductor cross section solid min.	0.2 mm ²
Conductor cross section solid max.	2.5 mm ²

Conductor cross section stranded min.	0.2 mm ²
Conductor cross section stranded max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
Tightening torque, min	0.5 Nm
Tightening torque max	0.6 Nm
Screw thread	M 3

Certificates / Approvals

Approval logo




requested approbations


Certification	CUL, CUL Listed, GOST, UL, UL Listed
Certification Ex:	CUL-EX LIS, UL-EX LIS

Drawings

Block diagram

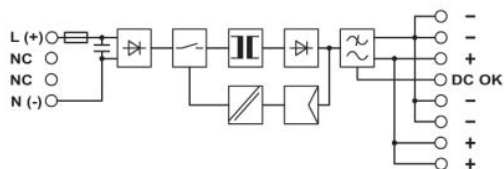

Dimensioned drawing

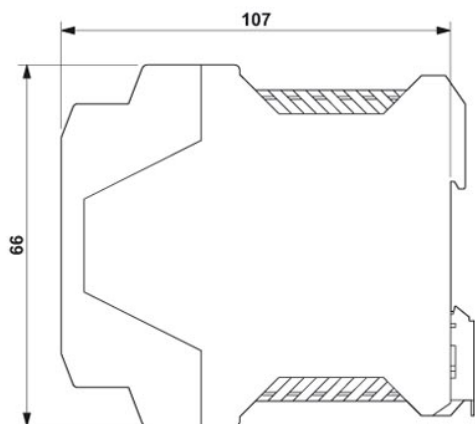

Address

PHOENIX CONTACT GmbH & Co. KG
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;