

► General data



Power supply unit, common-mode, input 120 V AC, output 24 V DC/2 A

Order number	2941248
Type	CM 90-PS-120AC/24DC/2

Barcode number	4017918080341
Unit pack	1 Pcs.
Customs tariff	85044094000

► Technical data

Input data

Nominal input voltage	120 V AC
Frequency range	50 Hz ... 60 Hz
Nominal power consumption	Approx. 80 VA
Input fuse	Slow-blow

Output data

Nominal output voltage	24 V DC ± 1 %
Output current	2 A
Residual ripple	60 mVss
Output fuse	IEC 127-2/EN 60 127-2
Protective circuit/component	Damping diode, varistor

General data

Width	90 mm
Height	146 mm
Depth	75 mm
Weight	2.5 kg
Operating voltage display	LED
Operating mode	100% operating factor
Test voltage input/output	4 kV AC
Degree of protection	IP 20
Ambient temperature (operation)	-20 °C ... 60 °C
Installation position	On horizontal DIN rail, venting slits above and below
Assembly instructions	Can be aligned with spacing = 10 mm
Standards/regulations	IEC 664/IEC 664A/DIN VDE 0110-1:1989-01
Standards/regulations	DIN VDE 0551, UL 1012, UL 1950

Connection data, input

Screw thread	M 2,5
Stripping length	8 mm
Type of connection	Screw connection
Min. conductor cross section AWG/kcmil	24
Conductor cross section AWG/kcmil max	14
Min. conductor cross section, rigid	0.2 mm ²
Conductor cross section, rigid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Max. conductor cross section, flexible	2.5 mm ²

Connection data, output

Stripping length	8 mm
Type of connection	Screw connection
Min. conductor cross section AWG/kcmil	24
Conductor cross section AWG/kcmil max	14
Min. conductor cross section, rigid	0.2 mm ²
Conductor cross section, rigid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Max. conductor cross section, flexible	2.5 mm ²

► Certificates

CSA


Comments	Output
Nominal voltage U_N	24 V
Nominal current I_N	2 A
AWG/kcmil	24-12

UL


Nominal voltage U_N	24 V
Nominal current I_N	2 A
AWG/kcmil	24-12

▶ Drawings

Diagram



Circuit diagram

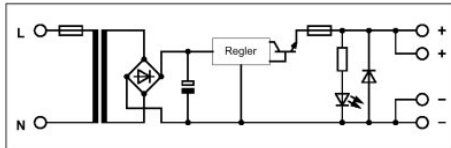

Approval logo



► Address

Phoenix Contact GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel + 49 - (0) 52 35 - 3-00
Fax + 49 - (0) 52 35 - 3-4 12 00
www.phoenixcontact.com

© Phoenix Contact
Technical modifications reserved