


*** UNCONTROLLED DOCUMENT * FOR REFERENCE ONLY**

Steward

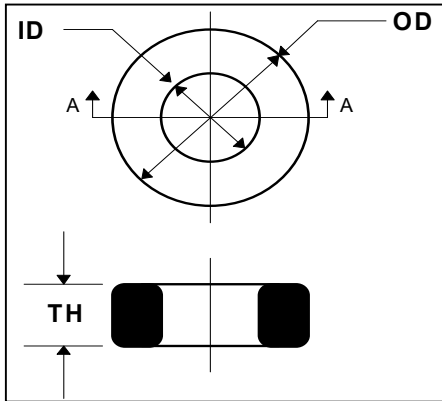

CORE DIMENSIONS				
UNCOATED CORE			40T1000-000	
	MM	INCHES	MM	INCHES
OD	25.40	(1.000)	± 0.76	(.030)
ID	15.50	(.610)	± 0.76	(.030)
TH	10.00	(.394)	± 0.38	(.015)
EPOXY COATING			40T1000-00H	
OD	26.92	(1.060)	max.	
ID	13.98	(.550)	min.	
TH	11.14	(.439)	max.	

WEIGHT / K 15.5096 KGS 34.1928 LBS
 INITIAL PERMEABILITY **10000**

ELECTRICAL SPECIFICATION								
	MIN TOL.	MIN (μ H)	NOM (μ H)	MAX (μ H)	MAX TOL.	FREQ. (kHz)	VOLT. (V)	URNS
L1	(-30.0%)	6.762	9.660	12.558	(+30.0%)	100	≤.0215	1
Q		4.0	-	-	-	100	≤.0215	1

COATING SPECIFICATIONS					
	TYPE	Max. Coating Thickness (mm)	Min. DLB VAC	Min. DLB VDC	TEST FORCE (LB)
40T1000-00H	EPOXY	0.76	1000	1333	4.93

Steward

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.

Date:	01/05/2006	DWG #:	40T1000-00H-D	Title:	40T1000-00H	REV:	D
Drawn By:	TMB						

REV	Description	ECN #	Date	INT
D	Change Coating To Epoxy		01/05/2006	TMB