
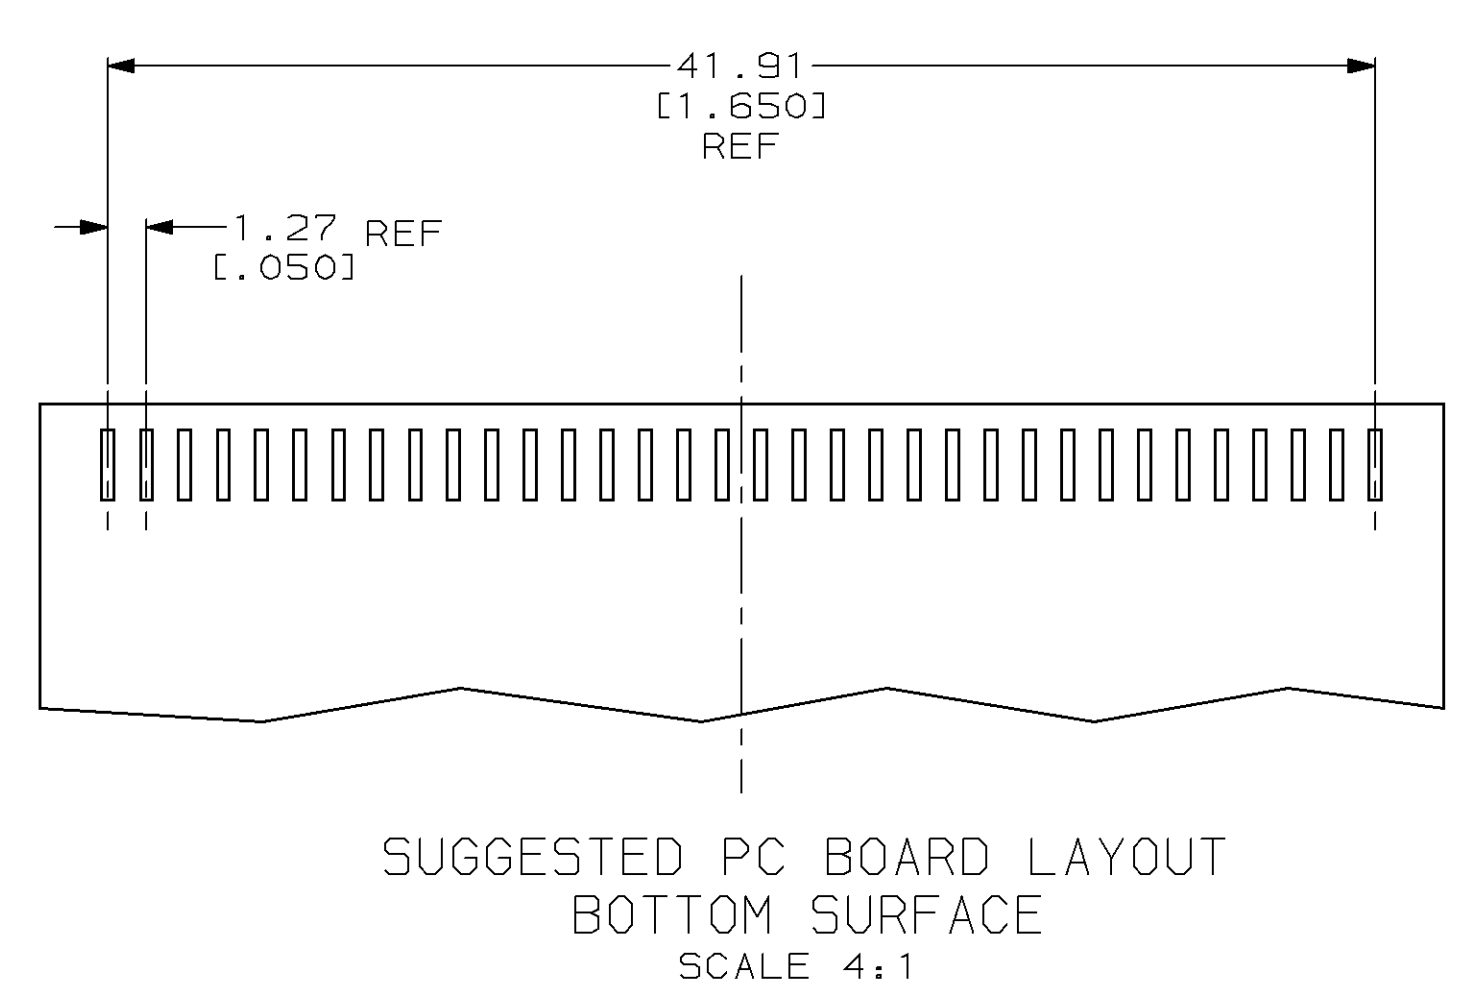
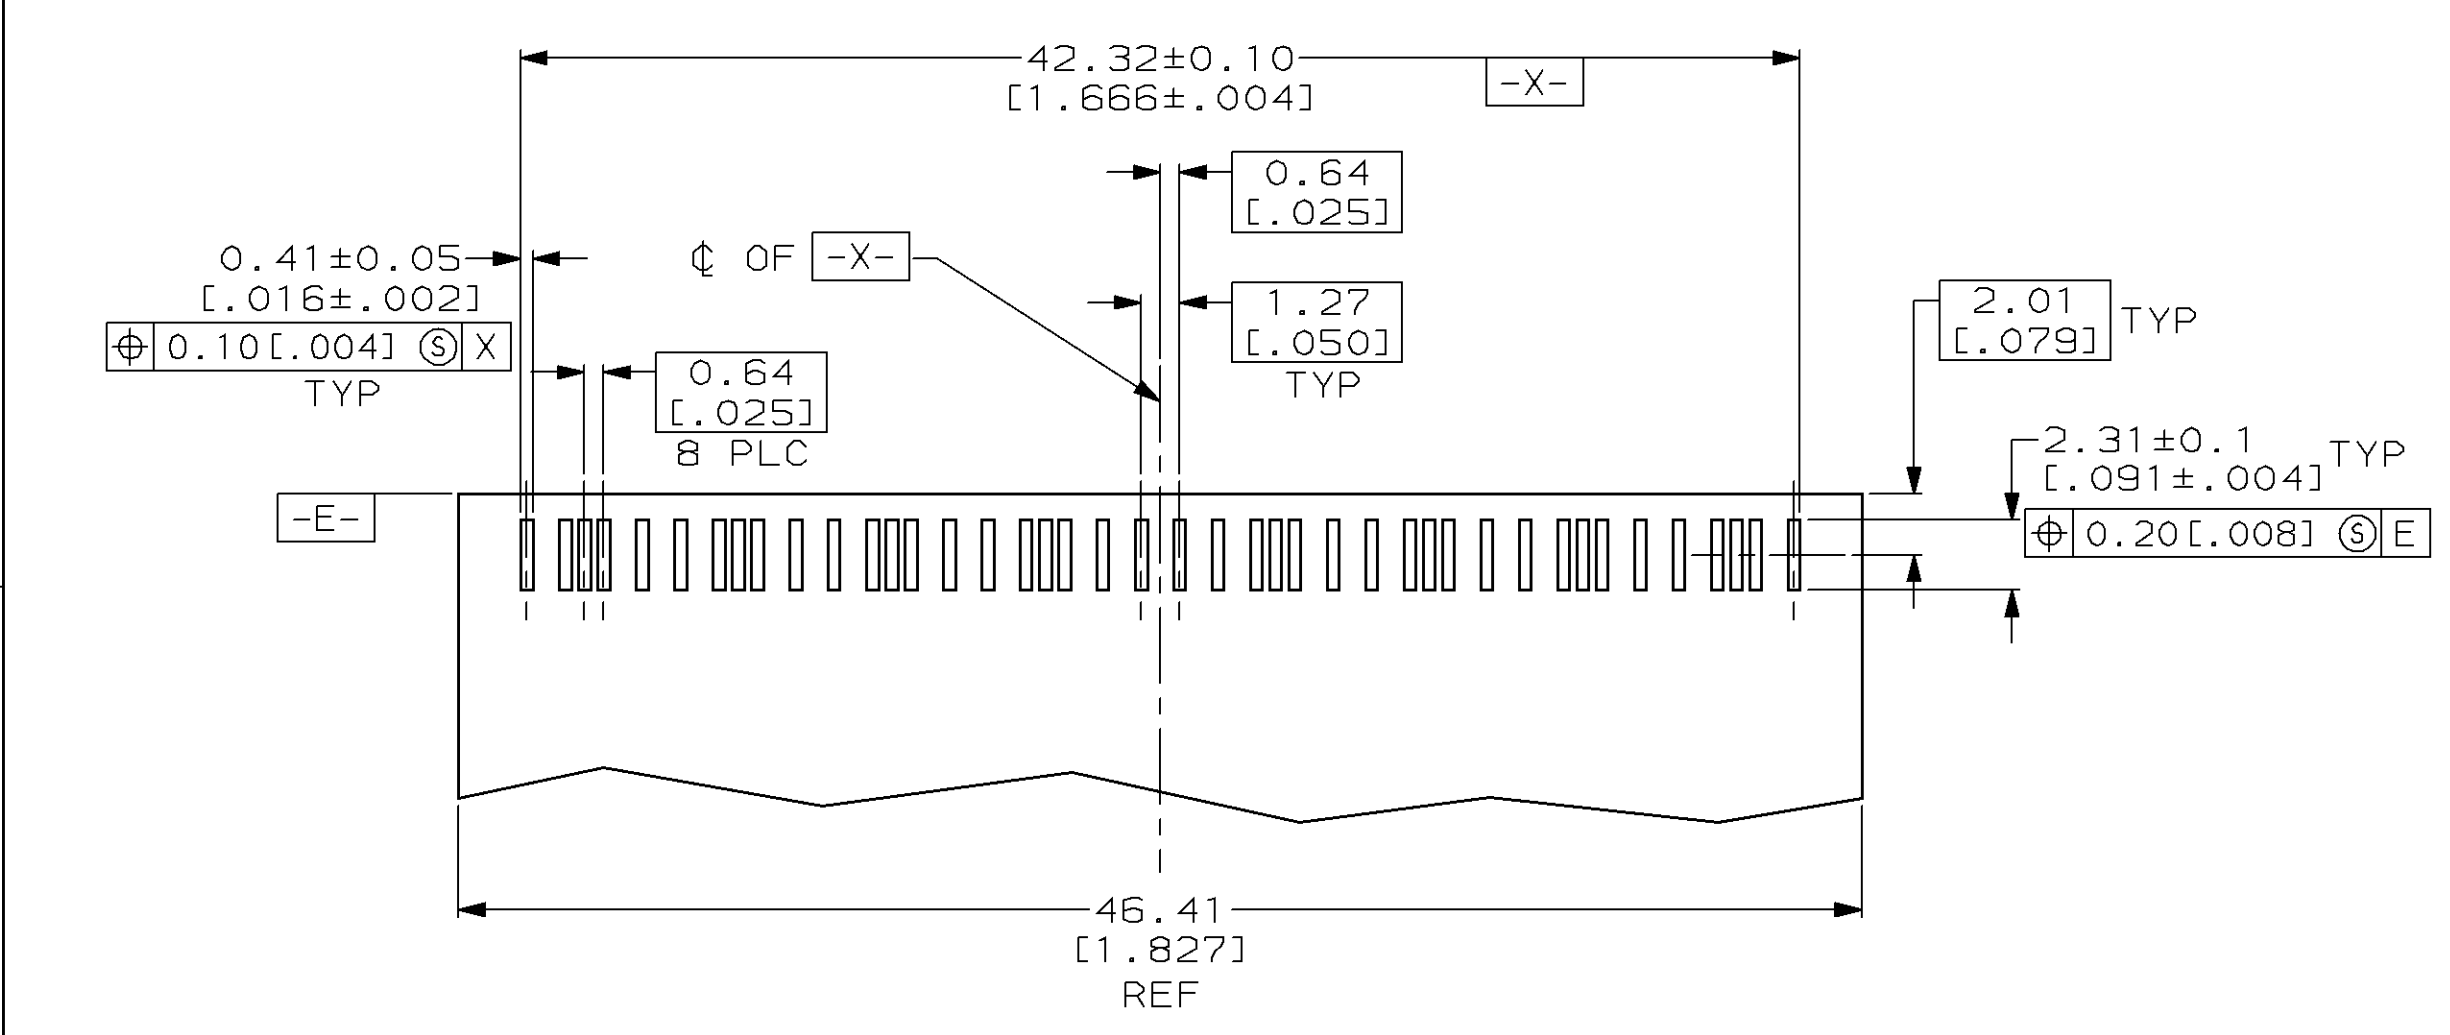
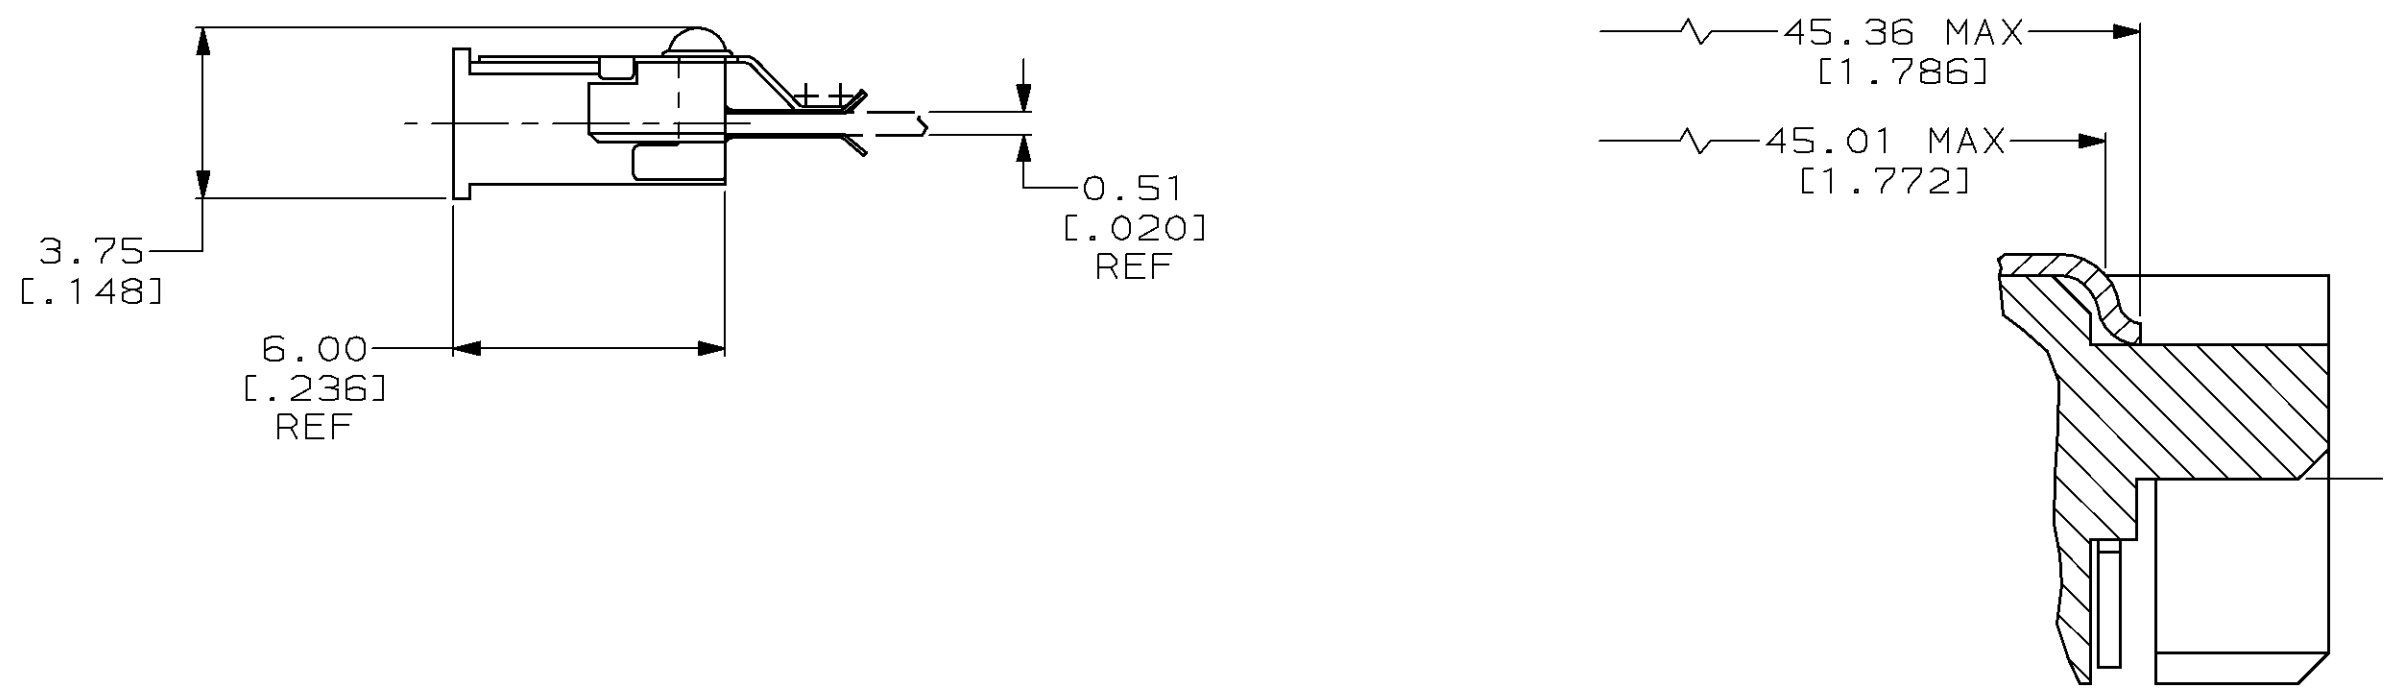
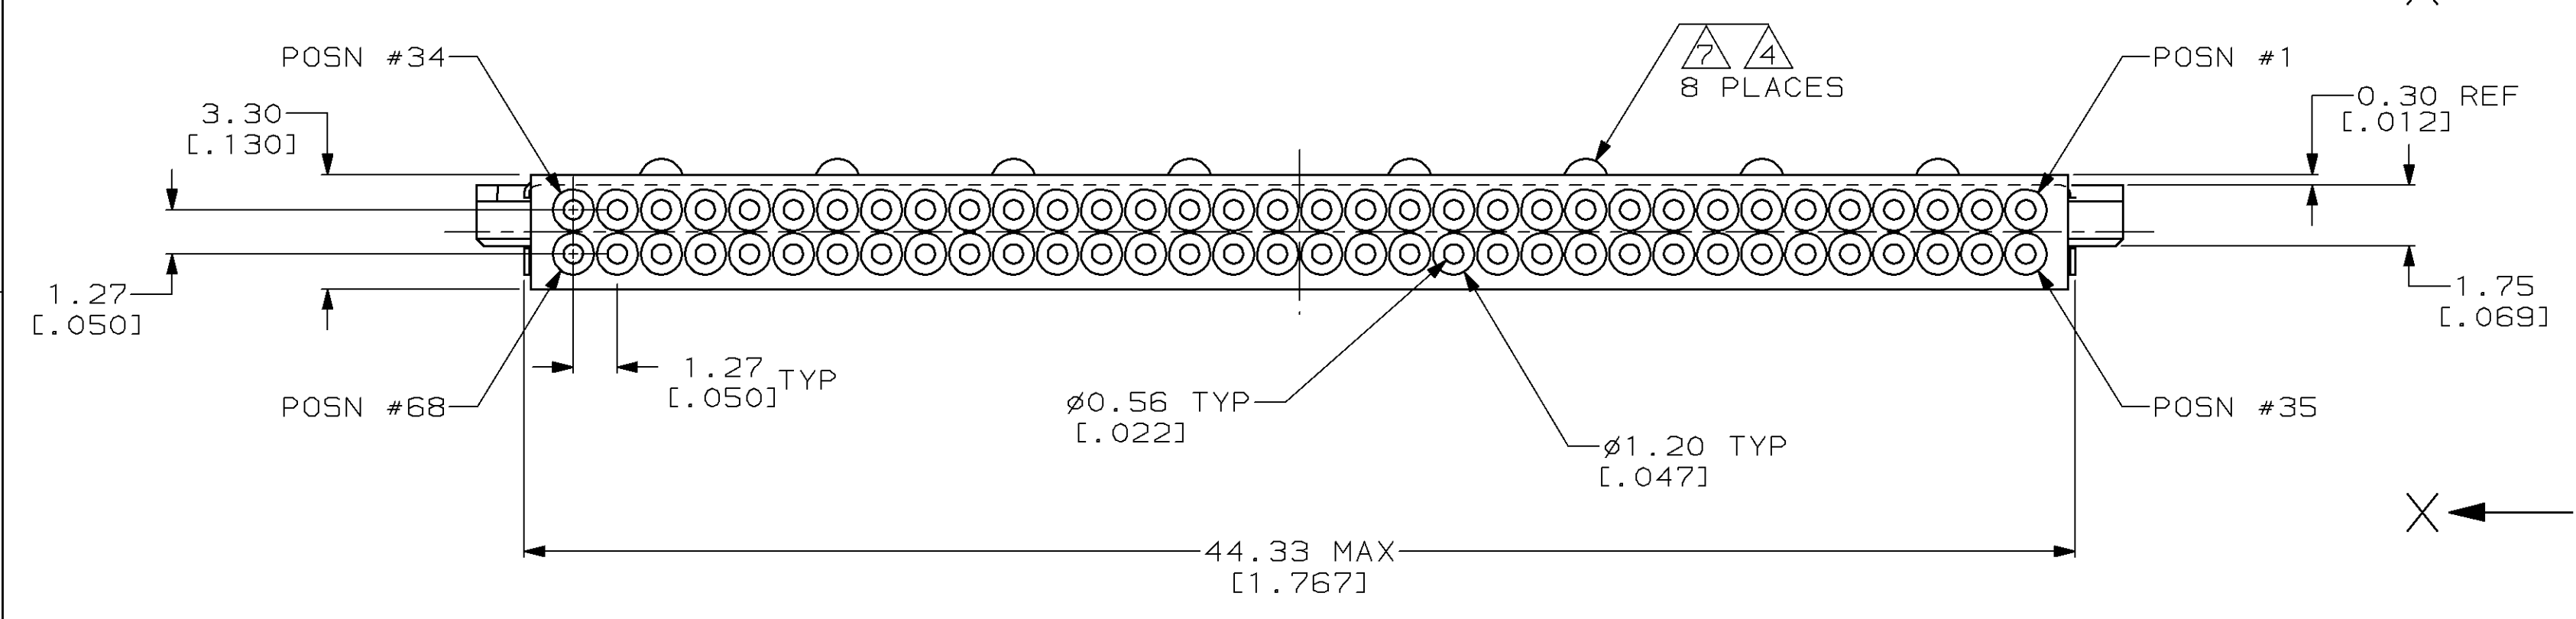
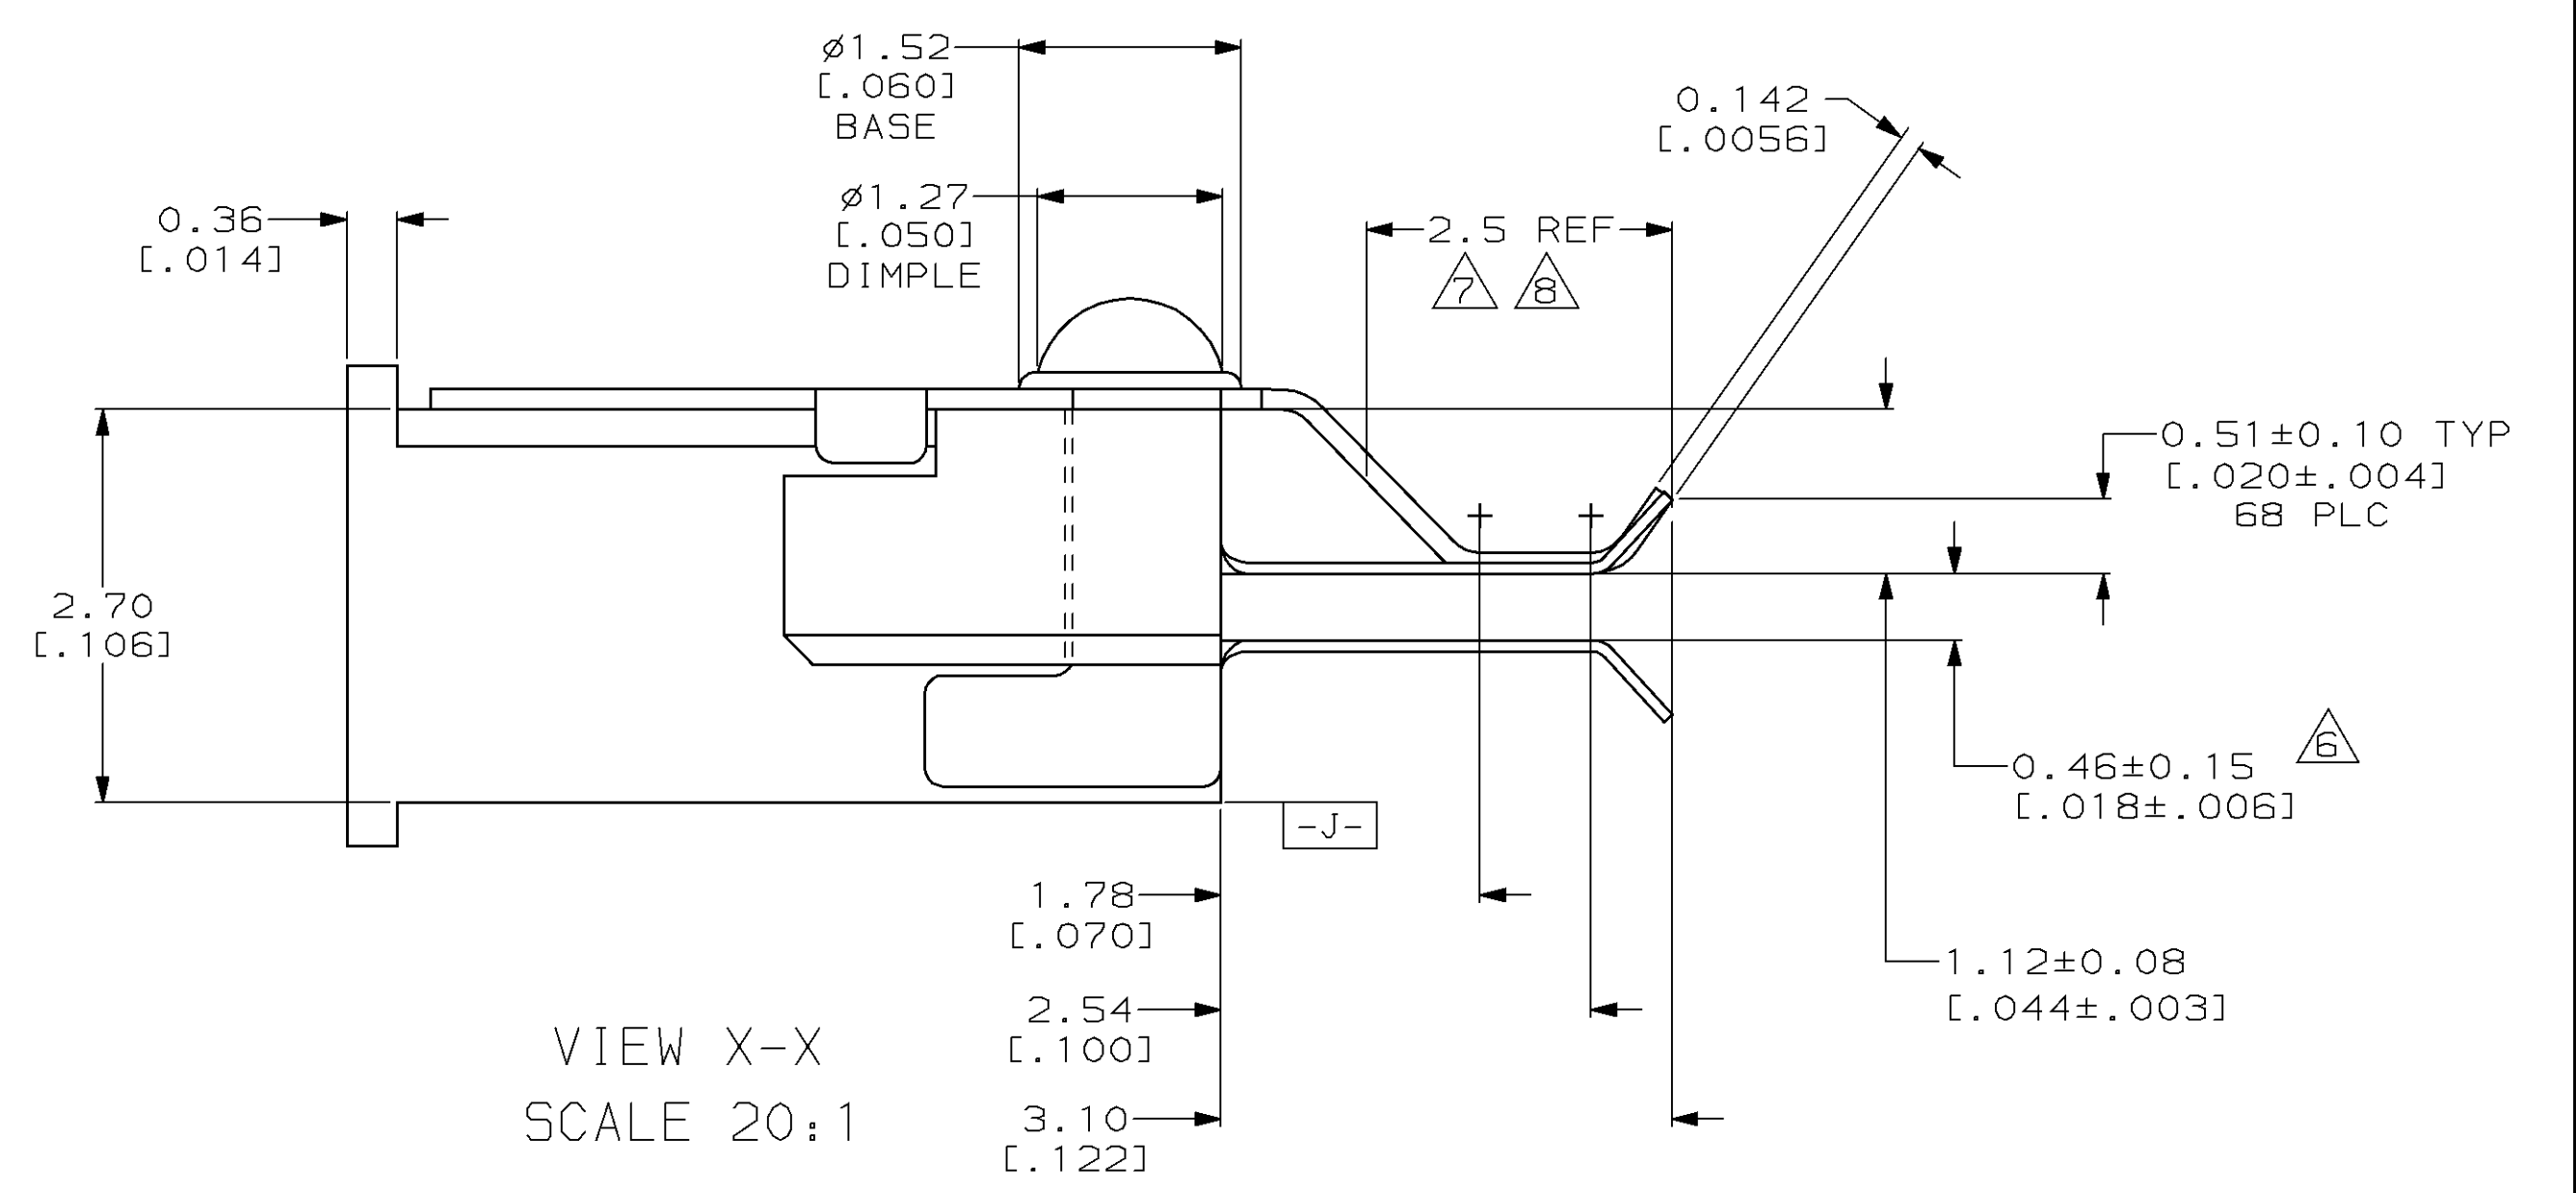


REVISONS		DATE	OWN	APVD
0	RELEASED	12/03/96	JR	DD
A	REV PER 0410-0258-97	6/30/97	JR	MP
B	REV PER 0651-0006-98	3/3/98	RB	MP
C	REV PER EC 0651-0154-98	10/12/98	MM	MP

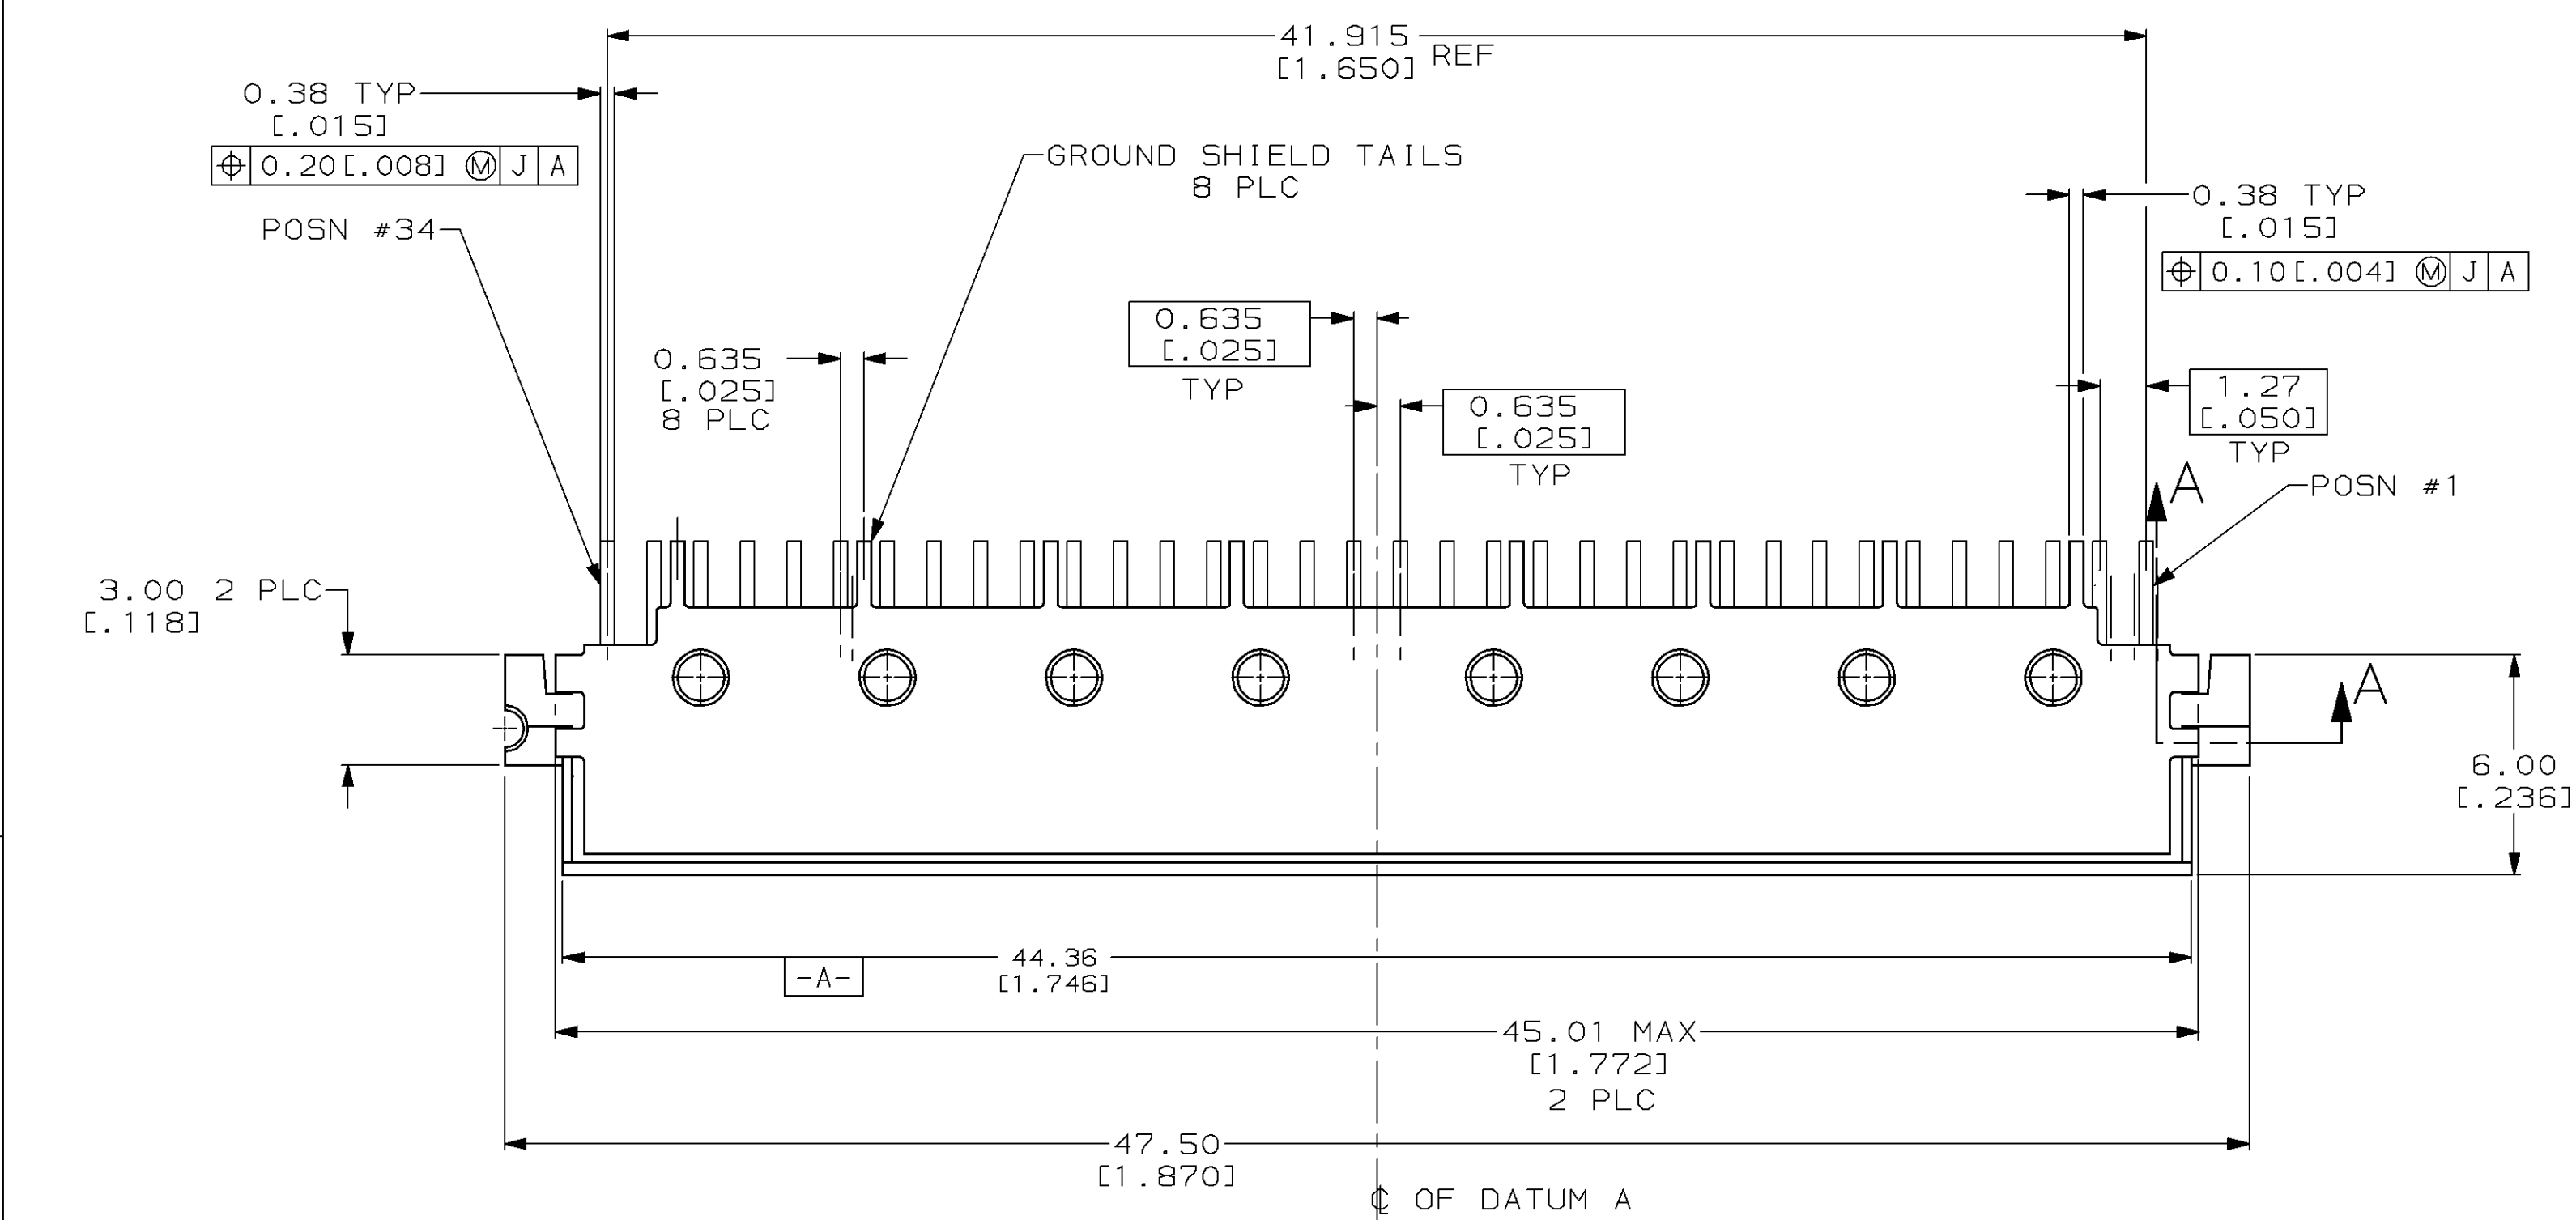

- 1 HOUSING: LCP, GLASS FILLED, COLOR: BLACK.
- 2 CONTACT: BERYLLIUM COPPER; SHIELD: PHOSPHOR BRONZE
- 3 CONTACT: 0.00076[.000030] MINIMUM GOLD ON MATING AREA, 0.00254[.000100] MINIMUM TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127[.000050] MINIMUM NICKEL.
- 4 LOCALIZED GOLD PLATE AREA.
- 5. POINT OF CONTACT 2.3[.091] REF FROM MATING FACE.
- 6 APPLIES TO ALL SOLDER TAILS.
- 7 SHIELD: 0.00076[.000030] MIN GOLD IN LOCALIZED GOLD PLATE AREA, 0.00381-0.00635 [.000150-.000250] BRIGHT TIN-LEAD IN LOCALIZED TIN-LEAD PLATE AREA, UNDERPLATING TO BE 0.00127 [.000050] MIN NICKEL ALL-OVER.
- 8 LOCALIZED TIN-LEAD PLATE AREA.

SUGGESTED PC BOARD LAYOUT TOP SURFACE SCALE 4:1

SUGGESTED PC BOARD LAYOUT BOTTOM SURFACE SCALE 4:1

146826-1
PART NUMBER

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP TECHNOLOGIES. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHALL BE CONTACTED FOR THE LATEST REVISION.</small>		J. REED 12/03/96 D. DIXON 12/03/96 D. DIXON 12/03/96	AMP Incorporated Harrisburg, PA 17105-3508
DIMENSIONS: mm (INCHES)	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±0.13 (.005) 3 PLC ±. 4 PLC ±. ANGLES 42°	PRODUCT SPEC APPLICATION SPEC DRAWING NO	RECEPTACLE ASSEMBLY, 68 POSN, CENTERED STRADDLE MOUNT, AMP PC CARDBUS
MATERIAL	FINISH	WEIGHT	SIZE CAGE CODE DRAWING NO
			A1 00779 C=146826
CUSTOMER DRAWING		SCALE 6:1	SHEET 1 OF 1 REV C