


4 3 2 1

THIS DRAWING IS UNPUBLISHED. BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED. © COPYRIGHT 20

REV	DATE	BY	APP'D
3	27NOV03	KG	DM
4	15JUL04	KG	DM
A	24AUG04	KG	DM
B	02MAY06	KG	DM

REV	DESCRIPTION
3	PPR 03-576
4	MARKING UPDATE, ADD NOTE 2
A	RELEASE PER 0A00-0367-04
B	ECR-06-007730

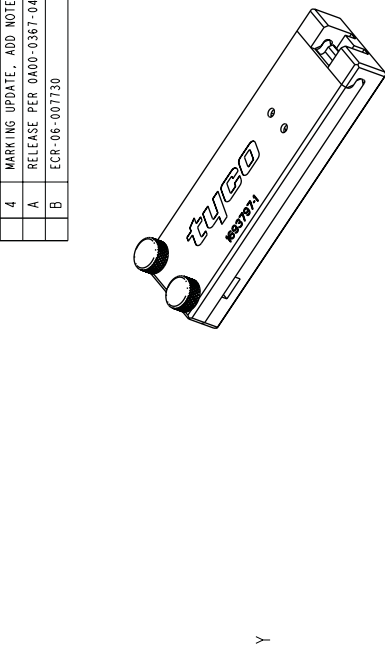


CAPTIVE THUMB SCREW  
MAT'L: STAINLESS STEEL

TOP CURING BLOCK  
MAT'L: ALUMINUM ALLOY

MIDDLE CURING BLOCK  
MAT'L: ALUMINUM ALLOY

BOTTOM CURING BLOCK  
MAT'L: ALUMINUM ALLOY

SCALE 1:1

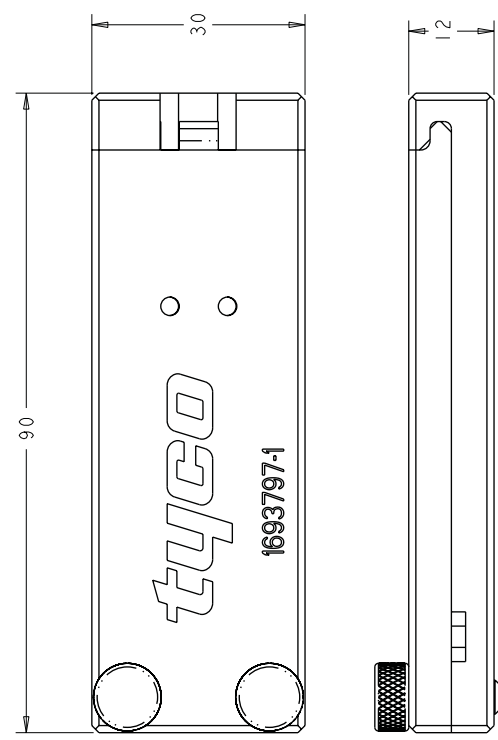

- ALL DIMENSIONS ARE FOR REFERENCE ONLY.
- USE THIS CURING FIXTURE WHEN TERMINATING FERRULES FOR ANY OF THE FOLLOWING CONNECTORS:
  - A. PRO BEAM JR. PLUG
  - B. PRO BEAM JR. SEALED BULKHEAD
  - C. PRO BEAM SR. STANDARD BULKHEAD

CHK: GLATFELT DATE: 22OCT2003 CHK: WERTMAN DATE: 24OCT2003		Tyco Electronics Harrisburg, PA 17105-3608	
PRODUCT SPEC:		NAME: CURRING FIXTURE, PRO BEAM JR., PLUG	
APPLICATION SPEC:		SIZE:	
DIMENSIONS:		WEIGHT:	
OTHER SPEC'S:		FINISH:	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 ANGLE ±		HARD ANODIZE (AL ONLY)	
MATERIAL:		CUSTOMER DRAWING:	
AS LISTED		SCALE: 2:1	
RESTRICTED TO:		SHEET 2 OF 2	
PART NUMBER: 1693797-1		REF: B	