
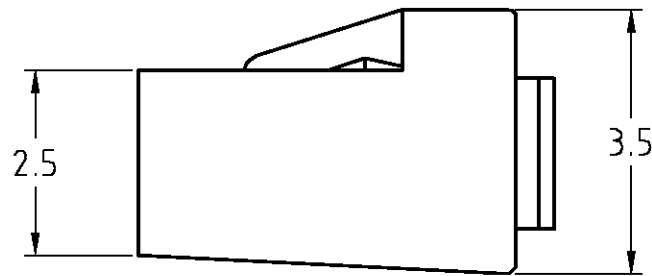
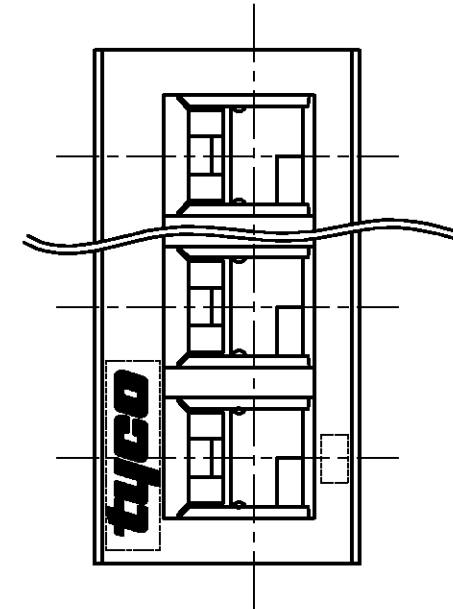
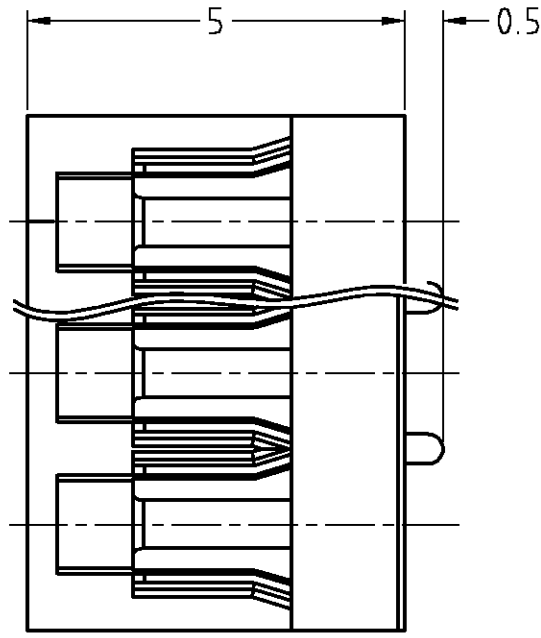


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	—	P	LTR	DESCRIPTION	DATE	DWN	APVD
		C		REDRAWN WITH CHANGE ECR-07-027362	15NOV'07	J.S	S.M

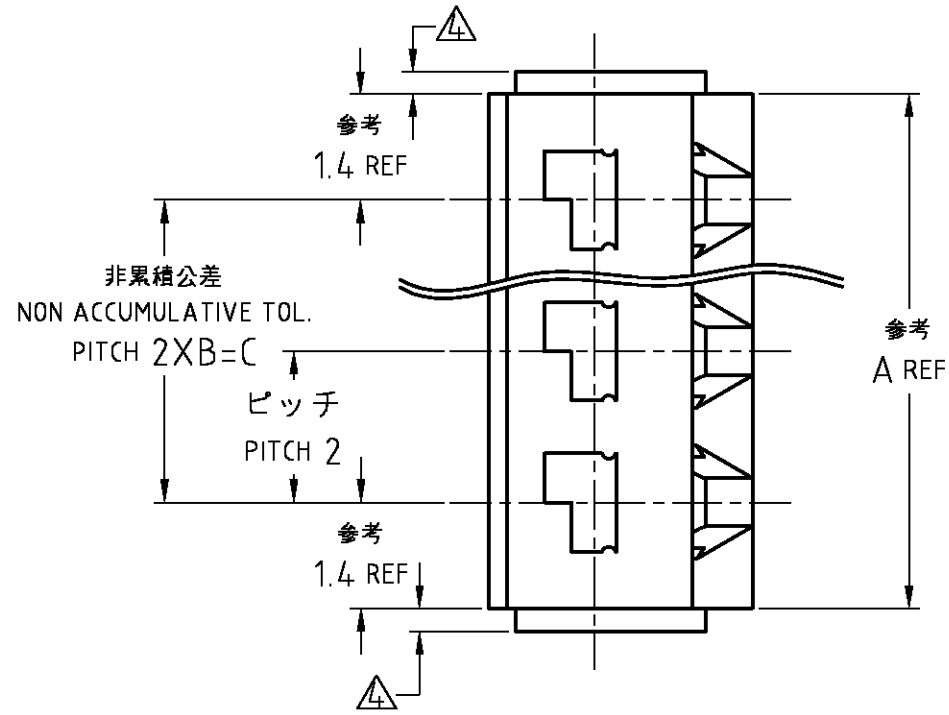

- 注記
1. 使用端子型番：172781,172782
 2. 一般公差：±0.4
 3. 取扱説明書：IS-207J,IS208J
- △ カutting端：0.4最大

- NOTES
1. APPLICABLE CONTACT：172781,172782
 2. GENERAL TOLERANCE：±0.4
 3. INSTRUCTION SHEET：IS-207J,IS208J
- △ CUTTING END：0.4MAX

OBSELETE	15	30.8	12	24			1	5
	12	24.8	11	22			1	2
OBSELETE	10	20.8	9	18			1	0
OBSELETE	9	18.8	8	16				9
	8	16.8	7	14				8
	7	14.8	6	12				7
	6	12.8	5	10				6
	5	10.8	4	8				5
	4	8.8	3	6				4
	3	6.8	2	4				3
	2	4.8	1	2	NATURAL (自然色)			172890-2
極数 POS	A	B	C	色調 COLOR		型番 P/N		
	寸法 DIMENSION							

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.SATO 15NOV2007	Tyco Electronics Corporation Kawasaki, Japan	
DIMENSIONS: 単位：mm		CHK S.MANABE 15NOV2007	NAME 名称	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD S.MANABE 15NOV2007	HEATER HOUSING LOW PROFILE MINI AMP-IN, 2MM PITCH	
0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		PRODUCT SPEC 製品規格 108-5163	DRAWING NO 番号 A300779 C-172890	
MATERIAL 材料 66ナイロン (UL94V-0) 66NYLON (UL94V-0)		FINISH 仕上	APPLICATION SPEC 取付適用規格	RESTRICTED TO —
		WEIGHT	SCALE 尺度 10:1	SHEET 1 OF 1
		CUSTOMER DRAWING	REV C	