


NUMBER  
305183

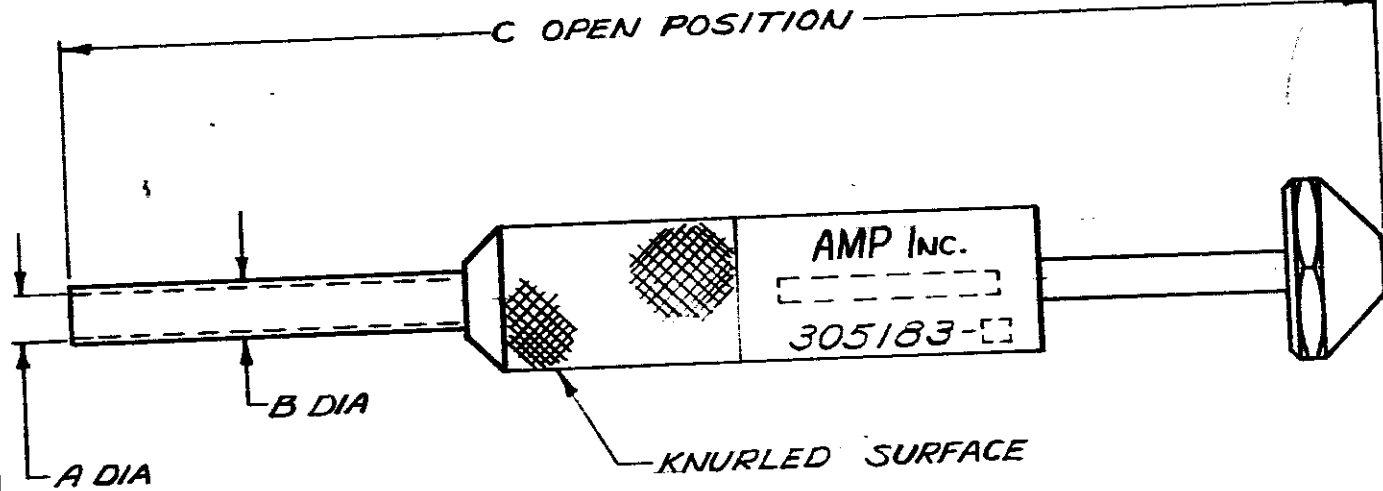

1-305183-3	A.R.I. POWER CONN.	.227	.243	4 1/16
1-305183-2	M-N-LOK SOCKET	.111	.160	3 15/16
1-305183-1	M-N-LOK PIN	.087	.119	3 15/16
1-305183-0	NASA PATCH TIP	.113	.154	3 15/16
305183-7	8	.256	.284	4 1/8
305183-6	10	.227	.251	4 1/16
305183-5	12	.189	.206	4
305183-4	14	.162	.179	4
305183-3	16-20	.137	.155	3 15/16
305183-2	20	.103	.119	3 15/16
305183	16-20 II	.115	.129	3 15/16
PART NO.	SIZE	A	E	C

DIMENSIONS IN INCHES. DO NOT SCALE PRINT.

G-1	Loc M was R	P.S.	-	Photo
G	Rev 555 Ag 8 Dia. 10-7	44	SS	2/23/64
F-1	Added -13	44	SS	4/15/64
F	Revised & Redrawn	44	SS	5/12/64
TR	REVISION RECORD	DR	CHK	DATE

©1960 BY AMP INCORPORATED. ALL RIGHTS RESERVED. AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.

**CUSTOMER COPY  
REFERENCE ONLY**

MATERIAL AND FINISH  
STEEL & ALUMINUM  
BLACK OXIDE

**AMP** AMP INCORPORATED  
HARRISBURG, PENNA.

WIRE — RANGE — INSULATION  
— # — | — # —

CLASS — # —  
TYPE — # —

TOLERANCE EXCEPT AS NOTED  
± .015 — ± .001

SCALE  
— # —

LOC **MA** NO **305183** REV **G-1**

NAME  
**TOOL — EXTRACTION**

DR *[Signature]* 5/15/64 DE *[Signature]*  
APP *[Signature]* 5/15/64