

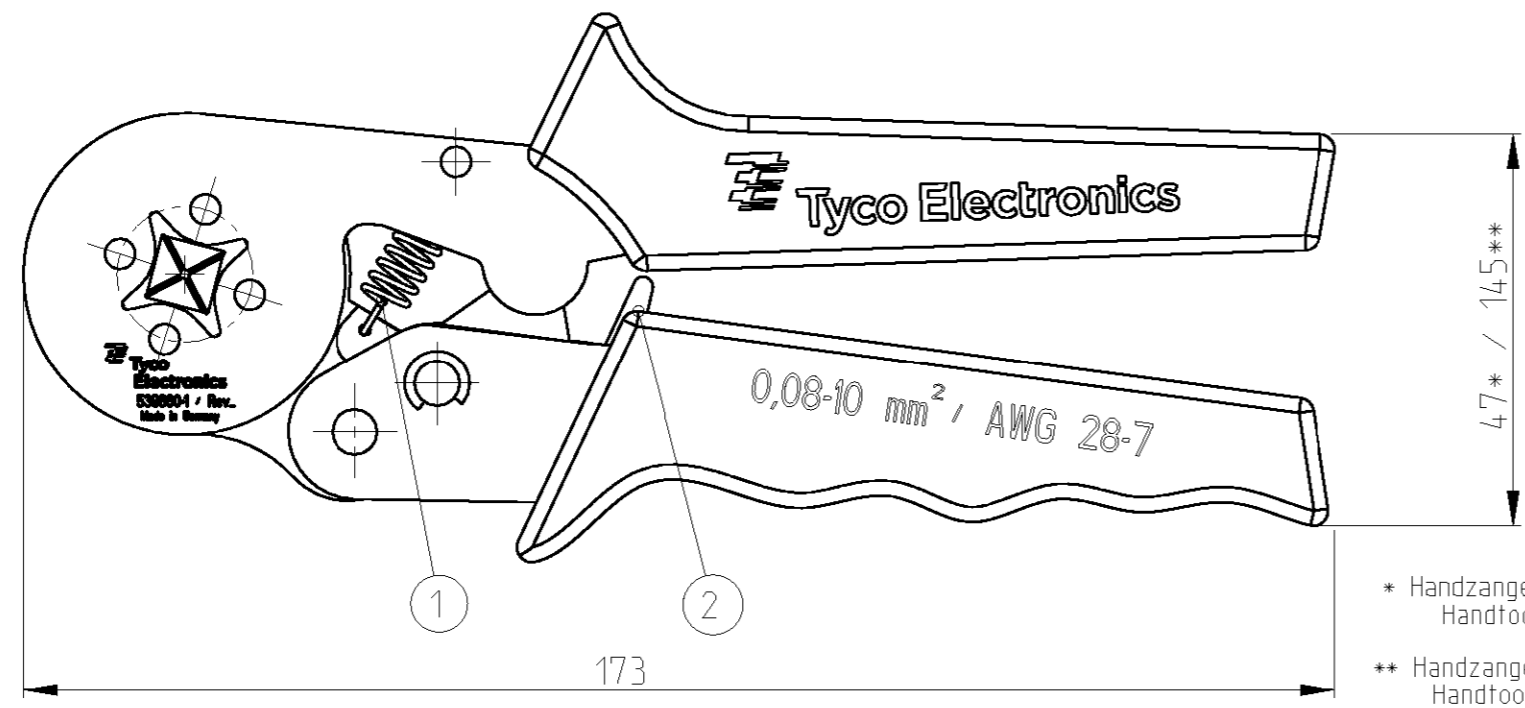


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 2007  
 © COPYRIGHT 2007 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
A1	-		A1	Pos. 1+2	07MAR02	-	UR
			B	ECR-07-022489	20SEP2007	Witt	Witt

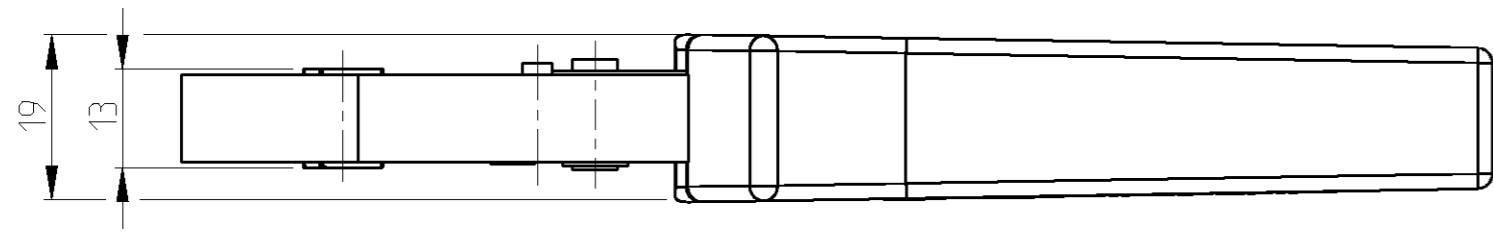

\* Handzange geschlossen  
Handtool closed  
 \*\* Handzange geoeffnet  
Handtool open

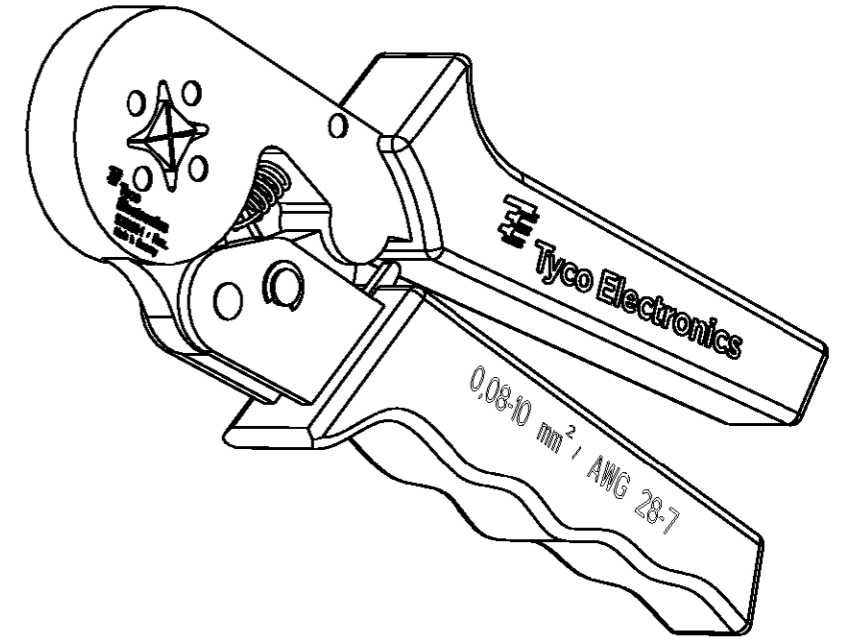

Handzange mit vier profilierten Crimpflaechen. Querschnittsbereich 0,08 - 10 mm<sup>2</sup>  
 Hand tool with four serrated crimp surfaces. Wire size range 0,08 - 10 mm<sup>2</sup>

Handzange geeignet zum Crimpen von Aderendhuelsen mit und ohne Kunststoffkragen nach DIN 46228 - Teil 1 und Teil 4. Maximale Crimplaenge 13 mm  
 Hand tool able to crimp wire ferrules with or without plastic sleeves according to DIN 46228 - Part 1 and Part 4. Maximum crimp length 13 mm

Tyco Electronics Aderendhuelsen TE PN 966066 und 966067 koennen mit dieser Handzange (max. Crimplaenge 13 mm) verarbeitet werden.  
 Tyco Electronics wire ferrules TE PN 966066 and 966067 can be processed with this hand tool (max. length 13 mm)

Hand tool mit Bedienungsanleitung 411-18232 im Karton verpackt  
 Hand tool packed in a card board with instruction sheet 411-18232

Ersatzteile / Spare parts

TE PN	DESCRIPTION	POS.
5-539783-0	Zugfeder/pull spring	2
5-539783-1	Zugfeder/pull spring	1

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN U.Reuter 13FEB2002	tyco Electronics AMP GmbH D - 64625 Bensheim	
DIMENSIONS: mm-DIN 7168-m		CHK -	NAME Handzange fuer Aderendhuelsen Handtool for Wire Ferrules	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ±		APVD -	RESTRICTED TO	
MATERIAL -		PRODUCT SPEC -	SIZE A3	CAGE CODE 00779
FINISH -		APPLICATION SPEC -	DRAWING NO C=539660-1	SCALE 1
		WEIGHT 380 g	SHEET 1	OF 1
		CUSTOMER DRAWING	REV B	