



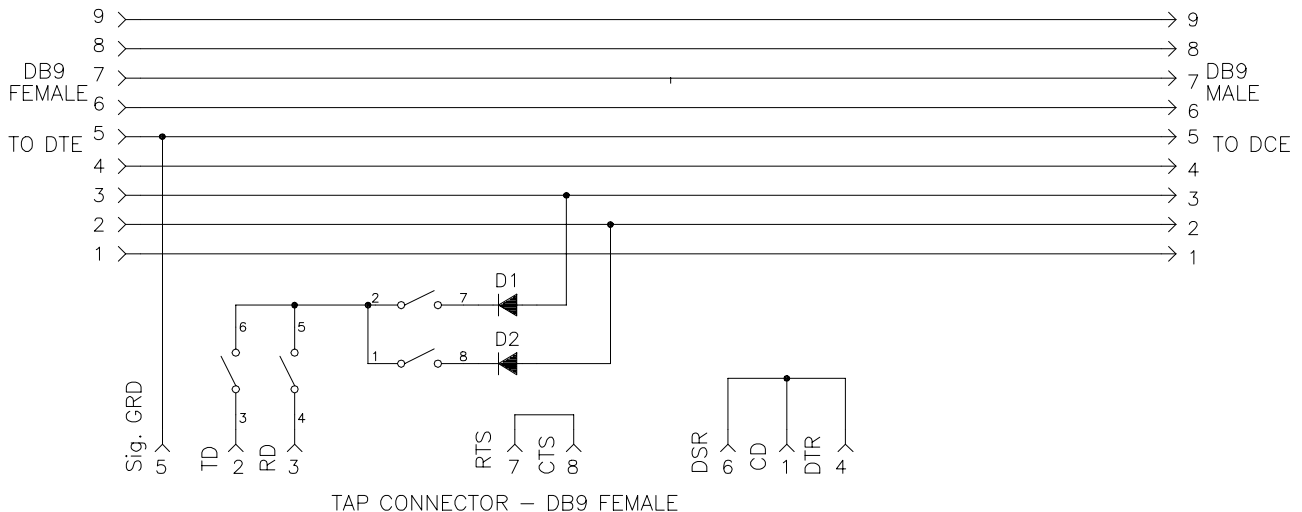

Tap Into Your RS-232 Data Lines CE Model 9PCDT

The **9PCDT** will allow an RS-232 port to tap in and check the data being transmitted between two other RS-232 ports. The switches make it simple to choose between monitoring the DCE or DTE port. The 9PCDT also allows the monitoring port to be either DTE or DCE.

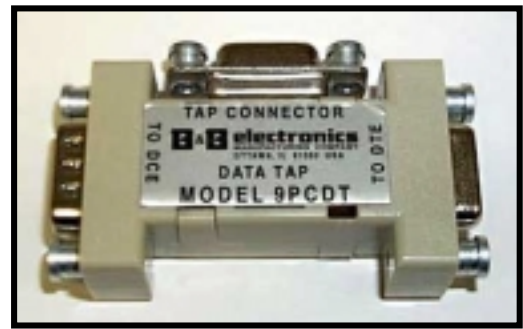

The DTE connector is male, and the DCE and TAP connectors are female. All nine lines are run through from the DCE to the DTE connectors. On the TAP connector RTS (pin 7) is tied to CTS (pin 8) and DSR (pin 6) is tied to CD (pin 1) and DTR (pin 4). Signal ground (pin 5) is tied into the signal ground for the DCE and DTE connectors.

Switch	Description
SW1	Monitor RD (pin 2)
SW2	Monitor TD (pin 3)
SW3	Tap receives data on pin 2
SW4	Tap receives data on pin 3

DECLARATION OF CONFORMITY	
Manufacturer's Name:	B&B Electronics Manufacturing Company
Manufacturer's Address:	P.O. Box 1040 707 Dayton Road Ottawa, IL 61350 USA
Model Numbers:	9PCDT
Description:	9-Pin Data Tap
Type:	Light industrial ITE equipment
Application of Council Directive:	89/336/EEC
Standards:	EN 50082-1 (IEC 801-2, IEC 801-3, IEC 801-4) EN 50081-1 (EN 55022, IEC 1000-4-2) EN 61000 (-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11) ENV 50204 EN 55024
	
Michael J. Fahrion, Director of Engineering	
	

© 2000 B&B Electronics – Revised November 2000

This product designed and manufactured in USA of domestic and imported parts by

B & B Electronics Mfg. Co.
707 Dayton Road - P.O. Box 1040 - Ottawa, IL 61350 USA
Phone: (815) 433-5100 - Fax: (815) 433-5105
Home Page: www.bb-elec.com
Sales e-mail: orders@bb-elec.com - Fax: (815) 433-5109
Technical Support e-mail: support@bb-elec.com - Fax: (815) 433-5104

B & B Electronics Ltd
Westlink Commercial Park - Oranmore, Co. Galway - Ireland
Phone: +353 91 792444 - Fax: +353 91 792445
Home Page: www.bb-europe.com
Sales e-mail: orders@bb-europe.com
Technical Support e-mail: support@bb-europe.com