


# Digital Satellite Tuner RF IC (X24108

# Highly Integrated, Complete Broadband Satellite Front-End Solution

Conexant's CX24108 is our second generation direct down-conversion satellite tuner RF IC intended for high-volume digital video, audio and data receivers. When combined with the HM1221 QPSK demodulator/FEC IC, the CX24108 provides a complete broadband satellite front-end solution capable of operating from 1 to 45 Msps in the most demanding satellite environments. It is designed for 80+ transponder systems and is compatible with international standards such as DVB and DSS. The highly integrated CX24108 satellite tuner RF IC reduces DBS tuner BOM cost and simplifies RF layout.

Following the integrated LNA, the CX24108 downconverts the satellite carrier directly to baseband and provides variable baseband filtering for the I/Q signals. It also has a completely integrated local oscillator. The VCO and synthesizer are built in and do not require external resonators or varactor diodes.

All of this performance is available with just a single +5V supply.

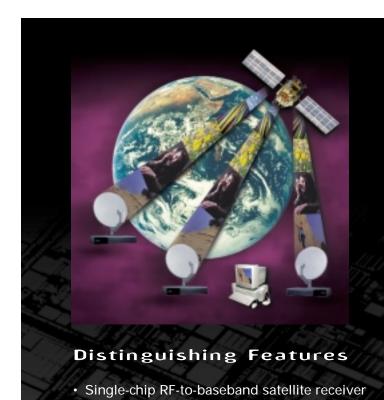

· Zero-IF architecture eliminates the need for


· Integrated LNA and LO with onboard VCO


· Variable baseband filters for optimal

image-reject filtering

interference rejection

and synthesizerSingle +5V supply



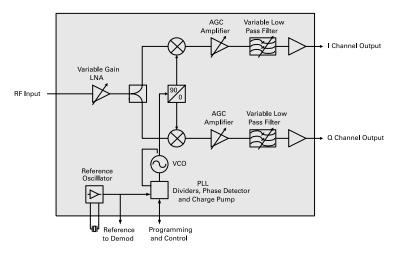

CX24108 block diagram

### **Product Features**

- Single-chip RF-to-baseband satellite receiver
- Zero-IF architecture eliminates the need for image-reject filtering
- Integrated LNA
- Integrated LO with onboard VCO and synthesizer
- Variable baseband filters for optimal interference rejection
- · Single +5V supply

### **Product Specifications**

- RF input: 950 to 2150 MHz
- Input power range: -20 to -81 dBm
- Noise figure: 10 dB, typical
- Input IP3 at minimum gain: 12 dBm, typical
- I/Q phase difference: ±3 degrees, typical
- I/Q amplitude difference: ±1.5 dB, typical
- Filter tune range: 0.5 to 30 MHz
- Output voltage, R  ${\scriptscriptstyle L}{\ge}1k\Omega$ : 0.5  $V_{p\text{-}p}$
- Typical junction temperature: 90° C at room temperature
- Operating temperature range: 0 $^{\circ}$  to 70 $^{\circ}$  C
- Package type: 48-pin eTQFP

Conexant and the Conexant symbol are trademarks of Conexant Systems, Inc.

### **Further Information**

literature@conexant.com (800) 854-8099 (North America) (949) 483-6996 (International) Order # 100969A 00-0600 Digital Infotainment

Printed in USA

World Headquarters Conexant Systems, Inc. 4311 Jamboree Road Newport Beach, CA 92660-3007 Phone: (049) 483, 4600

Phone: (949) 483-4600 Fax 1: (949) 483-4078 Fax 2: (949) 483-4391

### **Americas**

### U.S. Northwest - Santa Clara

Phone: (408) 249-9696 Fax: (408) 249-7113

## U.S. Southwest - Los Angeles

Phone: (805) 376-0559 Fax: (805) 376-8180

### **U.S. Southwest - Newport Beach**

Phone: (949) 483-9119 Fax: (949) 483-9090

### U.S. San Diego

Phone: (858) 713-4730 Fax: (858) 713-4008

### U.S. North Central - Illinois

Phone: (630) 773-3454 Fax: (630) 773-3907

### U.S. South Central/Mexico

- Texas

Phone: (972) 733-0723 Fax: (972) 407-0639

### U.S. Northeast - Massachusetts

Phone: (978) 367-3200 Fax: (978) 256-6868

### U.S. Carolinas - North Carolina

Phone: (919) 858-9110 Fax: (919) 858-8669

### U.S. Southeast/South America

– Florida

Phone: (727) 799-8406 Fax: (727) 799-8306

### U.S. Mid-Atlantic - Pennsylvania

Phone: (215) 244-6784 Fax: (215) 244-9292

### Canada - Ontario

Phone: (613) 271-2358 Fax: (613) 271-2359

### **Europe**

### **Europe Central - Germany**

Phone: +49 89 829-1320 Fax: +49 89 834-2734

### **Europe North - England**

Phone: +44 1344 486444 Fax: +44 1344 486555

### Europe - Israel/Greece

Phone: +972 9 9524000 Fax: +972 9 9573732

### **Europe South - France**

Phone: +33 1 41 44 36 51 Fax: +33 1 41 44 36 90

### Europe Mediterranean - Italy

Phone: +39 02 93179911 Fax: +39 02 93179913

### Europe - Sweden

Phone: +46 (0) 8 5091 4319 Fax: +46 (0) 8 590 041 10

### Europe - Finland

Phone: +358 (0) 9 85 666 435 Fax: +358 (0) 9 85 666 220

### Asia Pacific

### Taiwan

Phone: (886-2) 2-720-0282 Fax: (886-2) 2-757-6760

### Australia

Phone: (61-2) 9869 4088 Fax: (61-2) 9869 4077

### China - Central

Phone: 86-21-6361-2515 Fax: 86-21-6361-2516

### China - South

Phone: (852) 2 827-0181 Fax: (852) 2 827-6488

### China - South (Satellite)

Phone: (86) 755-5182495 Fax: (86) 755-5183024

### China – North

Phone: (86-10) 8529-9777 Fax: (86-10) 8529-9778

### India

Phone: (91-11) 692-4789 Fax: (91-11) 692-4712

### Korea

Phone: (82-2) 565-2880 Fax: (82-2) 565-1440

### Korea (Satellite)

Phone: (82-53) 745-2880 Fax: (82-53) 745-1440

### Singapore

Phone: (65) 737 7355 Fax: (65) 737 9077

### Japan

Phone: (81-3) 5371 1520 Fax: (81-3) 5371 1501

