

SACC-M12MS-5CON-PG 7-M

Order No.: 1663116

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1663116>Sensor/actuator connector, male, straight, 5-pos., M12, A-coded,
screw connection, metal knurl, cable screw connection Pg7**Commercial data**

EAN	4017918116583
Pack	1 Pcs.
Customs tariff	85366990
Weight/Piece	0.02313 KG
Catalog page information	Page 34 (PC-2007)

Product notesWEEE/RoHS-compliant since:
06/12/2006

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data**General data**

Nominal current I_N	4 A
Nominal voltage U_N	60 V
Number of positions	5
Volume resistance	$\leq 8 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ M}\Omega$

Ambient temperature (operation)	-40 °C ... 85 °C
Pg screw connection	Pg7

General characteristics

Coding	A - standard
Inflammability class acc. to UL 94	V0
Surge voltage category	II
Pollution degree	3
Degree of protection	IP67
Contact material	CuZn
Contact surface material	CuSnZn
Contact carrier material	PA 66
Material of grip body	PBT
Material, knurls	Zinc die-cast, (nickel-plated)
Sealing material	NBR
Type of connection	Screw connection
Conductor cross section stranded min.	0.25 mm ²
Conductor cross section stranded max.	0.75 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	18
Min. diameter	4 mm
Max. diameter	6 mm
Status display	No

Certificates / Approvals

Approval logo




requested approbations

Certification	CUL, GOST, UL
---------------	---------------



Drawings

Dimensioned drawing

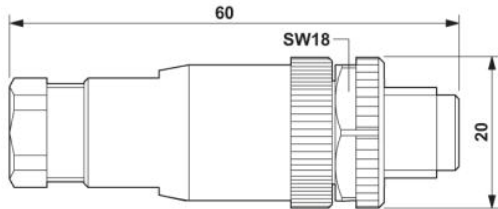


M12 x 1 male connector, straight

Schematic diagram

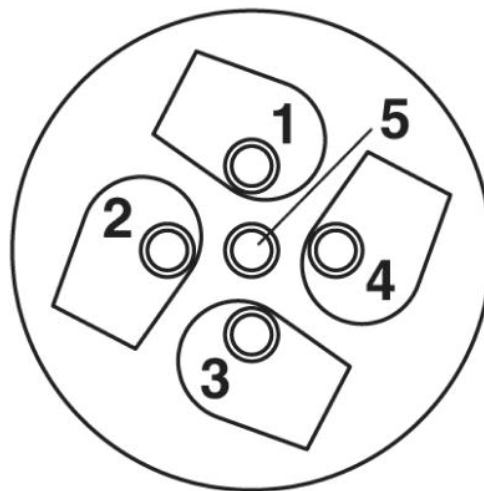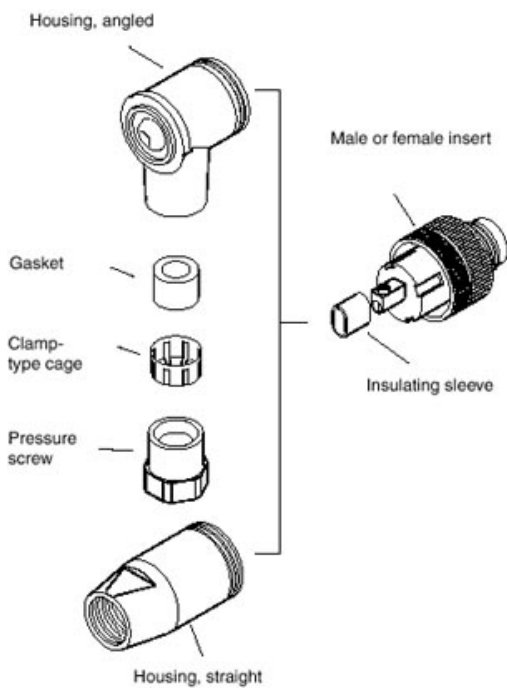

Cable connection side M12 (screw connection)

Male/Female M12

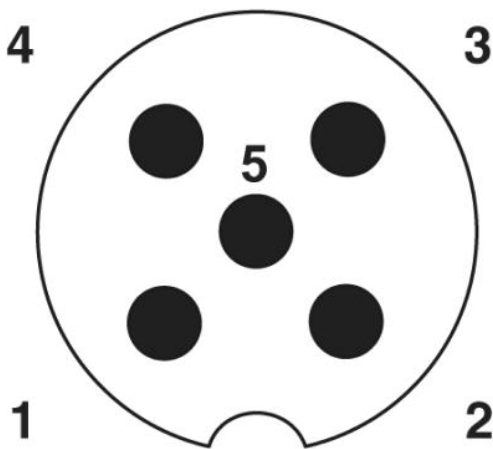

Pin assignment M12 male connector, 5-pos., A-coded, male side

Address

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 00
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2008 Phoenix Contact
Technical modifications reserved;